



REVISION					
No.	DESCRIPTION	REV	DRAWN	APPR	DATE
1	Initial Registration	IR	S.Y.EUN	I.C.KIM	2020. 01. 21.

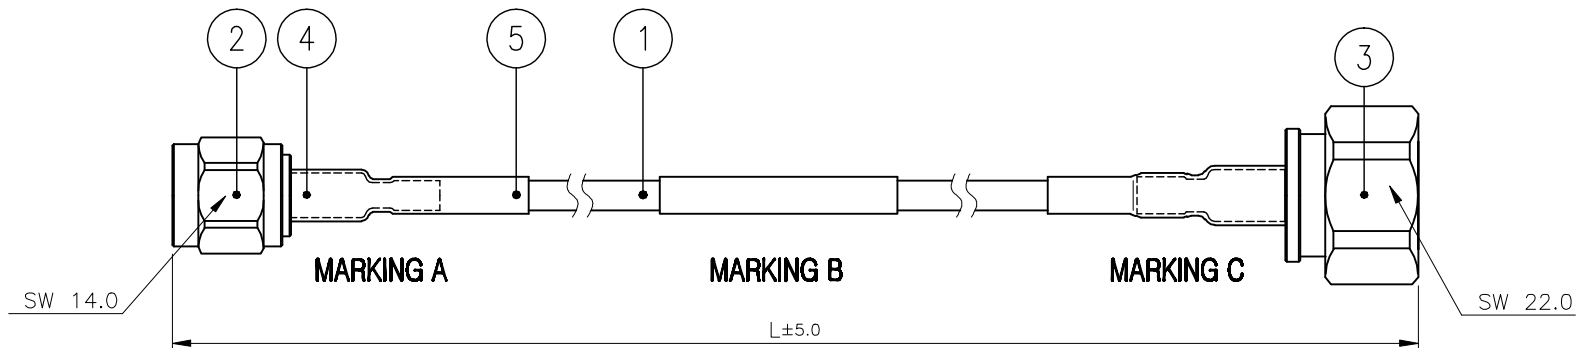

※ TNC,4.3/10 CONNECTOR 모두 PIPE 압착하지 않고 끼운 상태에서 BONDING TUBE 수축 작업 후 MARKING TUBE 수축 할 것.

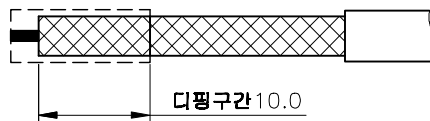

※ 4.3/10 CONNECTOR ASSY 작업 시 쉴드 10mm구간까지 디핑하여 작업할 것.



Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES

- 2-1. TNC PS---->▷ BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating
- 2-2. 4.3/10 PS-->▷ BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Min) : -0.6dB
5. PIMD SPEC : 150dBc (Min) (20W*2Tone)

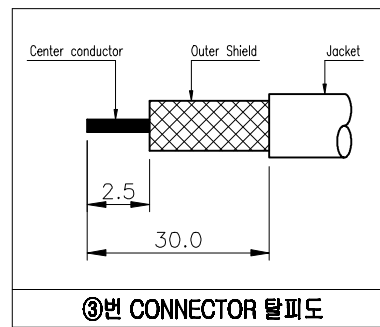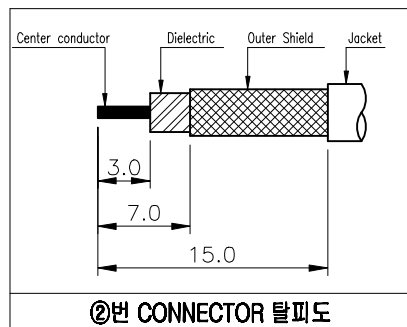

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
	DATE	2020. 01. 21.				
	CUSTOMER CODE	APPROVED BY	I.C.KIM	 RF & MICROWAVE TECHNOLOGY Tel : 02-02-047-0015 Fax : 02-02-047-0017		
	CABLE LENGTH TOLERANCE	CHECKED BY				
CABLE LENGTH TOLERANCE		DRAWN BY	S.Y.EUN	TITLE		
0 ~ 1000mm : +5, -0		CHECKED BY		A4	DWG NO.	CF01462-7/1
1000 ~ 2000mm : +10, -0		SCALE	N/S		DETAIL NO.	
2000 ~ 3000mm : +15, -0		UNIT	mm		REVISION	I R
3000 ~ 4000mm : +20, -0					SHEET	1 of 1
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%						