


ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.3

- * PIN땜 작업 시 절연체 녹는 것 주의
* 케이블 은박지 쉴드 안쪽 부분까지 올려서 작업 할 것

MECHANICAL DATA :

1. TEMPERATURE RANGE : -40° C ~ 105° C

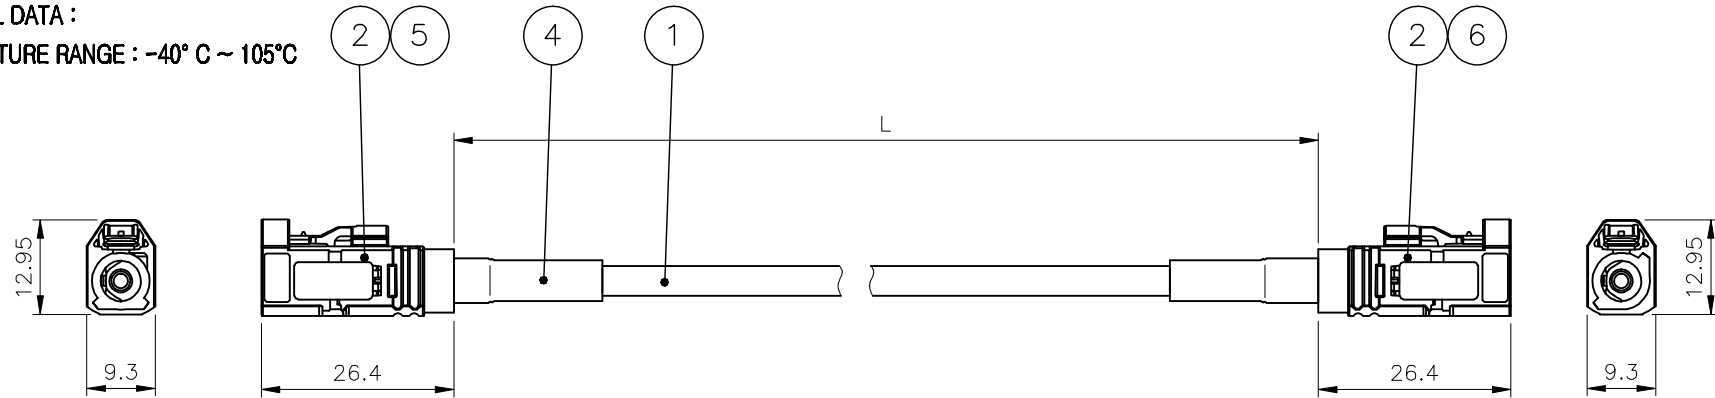


Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

- 2-1. FAKRA JS (M Type)----> BODY : Nickel Plating
CONTACT : Gold Plating
- 2-2. FAKRA JS (N Type)----> BODY : Nickel Plating
CONTACT : Gold Plating

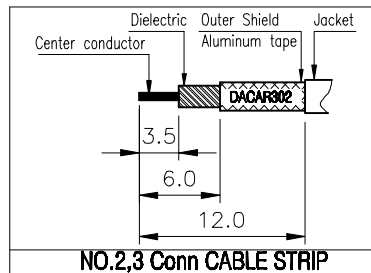

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018. 01. 08.
1	FAKRA 커넥터 코드 변경 및 HOUSING 추가	S.Y.EUN	I.C.KIM	2018. 01. 15.
2	고객사 요청사항으로 인한 케이블 제조사 변경	S.Y.EUN	I.C.KIM	2019. 12. 18.
3	FAKRA Connector Rosenberger사 제품으로 변경	S.Y.EUN	I.C.KIM	2020. 01. 09.

3	1	6	HOUSING	1	Rosenberger	DCU02306-N/4 DCU02292-N/3	N Type (59Z113-000N)
3	1	5	HOUSING	1	Rosenberger	DCU02306-N/3 DCU02292-N/2	M Type (59Z113-000M)
		4	SHRINK TUBE	2	LS TUBE	ATU00060-N/1	ø6-20 (Black)
		3	CONNECTOR	1	KJ COMTECH	CN03731-7/3	FAKRA JS (N Type)
		2	CONNECTOR	2	Rosenberger	CN03854-N/1 CN03731-7/4	FAKRA50 JS (59K130-1M4A4)
		1	COAXIAL CABLE		LEONI COAX-PARK	ACA00467-N/1 ACA00467-N/2	DACAR302 (BLACK)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2020. 01. 09.			 RF & MICROWAVE TECHNOLOGY Tel : 82-82-947-8915 Fax : 82-82-947-8917 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			A4		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			DWG NO. CF01470-7/1 DETAIL NO. REVISION 3 SHEET 1 of 1		
	SCALE	UNIT				
	N/S	mm				



TITLE CABLE ASS'Y

A4	DWG NO.	CF01470-7/1	
	DETAIL NO.		
	REVISION	3	SHEET 1 of 1