


Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

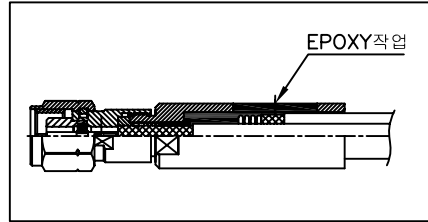

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.04.02.


※케이블 특성 불량 감안하여 길이 +로 여유있게 작업 요망※

※ 제품별 1:1 측정한 DATA 출력하여 제출할 것 ※

- 측정 DATA 저장 시 시리얼No.포함 할 것

* ASS'Y 주의사항 작업지도서 참고할 것*

포장사양 도면등록 첨부파일 참조

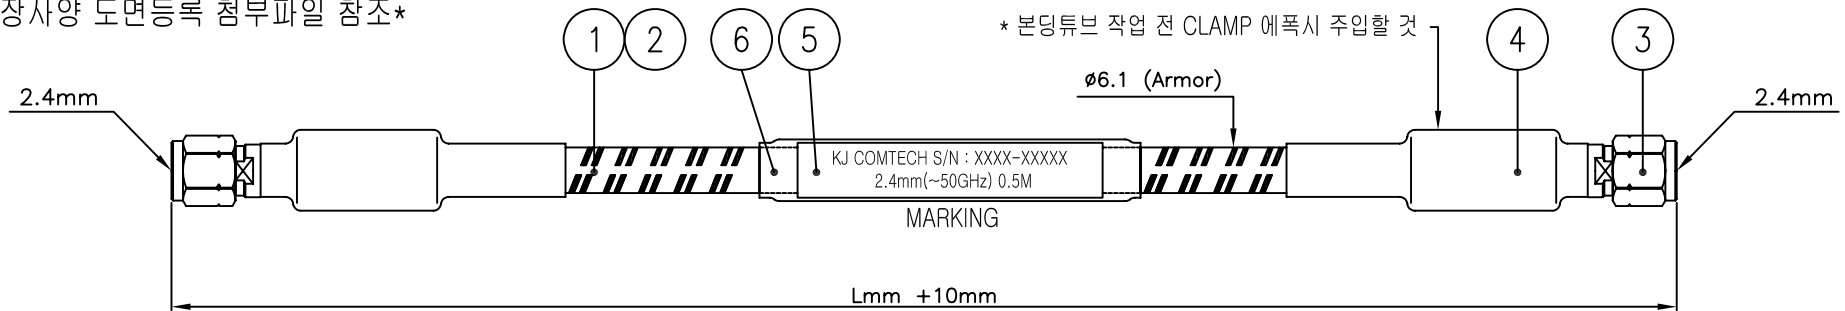

해당년도 4자리수 수주등록 시리얼번호

순수 케이블 절단 길이 : L-15mm
Armor 절단 길이 : L-55mm

KJ COMTECH S/N : XXXX-XXXXX
2.4mm(~50GHz) *M


MARKING

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~50GHz
3. VSWR (Max) : 1.25

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. 2.4mm PS-----▶ BODY : SUS / Passivated
CONTACT : BRASS / Gold Plating
COUPLING CAP : SUS / Passivated

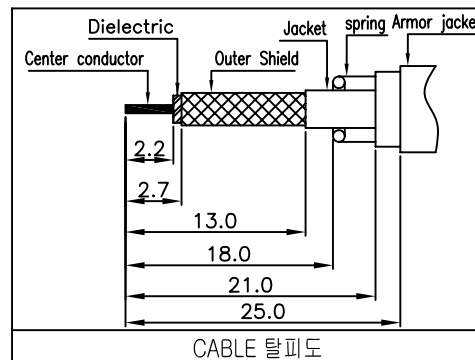

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2020. 04. 02.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE 0 ~ 50mm : +0.5 ~ -0.5 50 ~ 200mm : +1.0 ~ -1.0 100 ~ 500mm : +2.0 ~ -2.0 200 ~ 500mm : +3.0 ~ -3.0 Bending Angles : -1.0° ~ -3.0°	CHECKED BY			TITLE CABLE ASS'Y		
	DRAWN BY	S.Y.EUN				
	CHECKED BY			A4	DWG NO.	CF01488-7/1
	SCALE N/S	UNIT			DETAIL NO.	
					REVISION	I R