



REVISION

No.	DESCRIPTION	REV	DRAWN	APPR	DATE
IR	Initial Registration	IR	S.Y.EUN	I.C.KIM	2020. 05. 06.

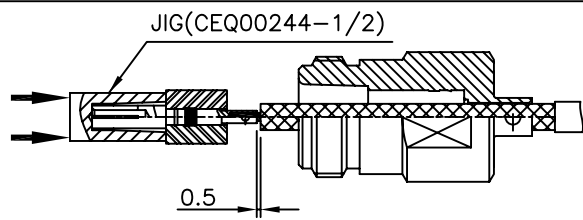

MARKING

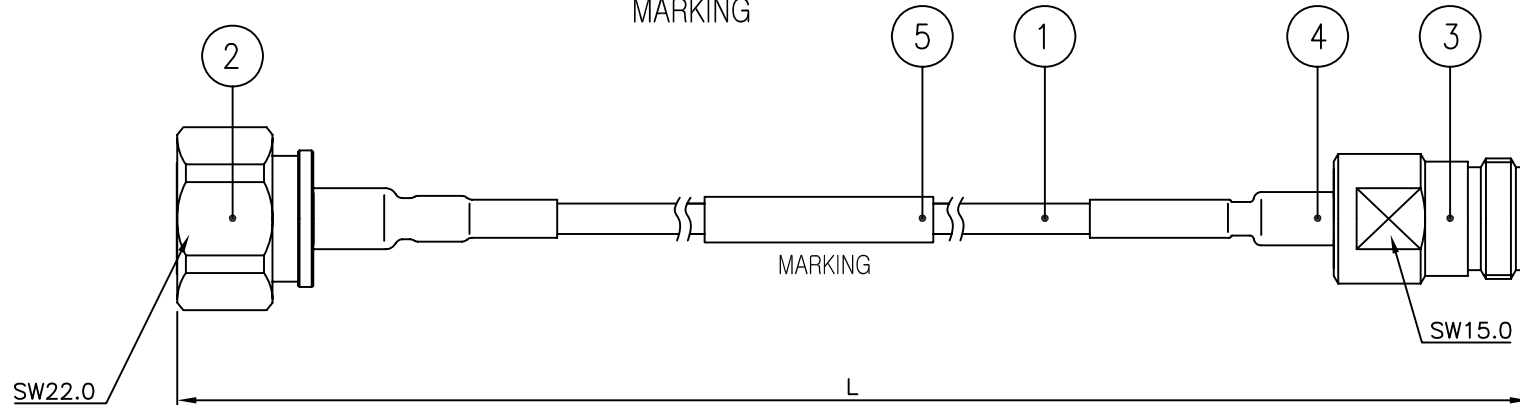

Notes

- RoHS & Pb-FREE
- CONNECTOR FINISHES
 - 4.3/10 PS--> BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating
CAP : Nickel Plating
 - N JS-----> BODY : SUCO 3micron Plating
CONTACT : Silver 5micron Plating


ELECTRICAL DATA :

- IMPEDANCE : 50ohm
- FREQUENCY RANGE : DC~6GHz
- VSWR (Max) : 1.2
- INSERTION LOSS (Min) : -1.5dB
- PIMD SPEC : 150dBc (Min) (20W*2Tone)


※ 4.3/10,N CONNECTOR 모두 PIPE 압착하지 않고 끼운 상태에서 BONDING TUBE 수축 할 것.



※ 4.3/10,N CONNECTOR ASSY 작업 시 쉴드 10mm구간까지 디핑하여 작업할 것.

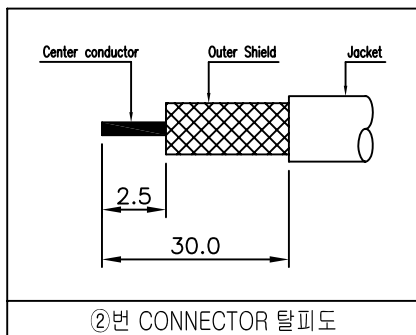

②번 CONNECTOR 탈피도

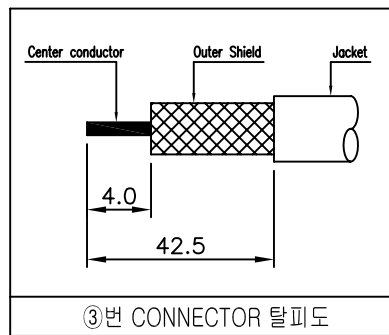

③번 CONNECTOR 탈피도

5	MARKING TUBE	1	LS TUBE	ATU00216-N/1	ø6-30mm (White)
4	BONDING TUBE	2	LS TUBE	ATU00006-N/1	ø6-45mm (Black)
3	CONNECTOR	1	KJ COMTECH	CN02504-7/5	N50 JS
2	CONNECTOR	1	KJ COMTECH	CN03608-7/B	4.3-10 DIN50 PS (SCREW)
1	COAXIAL CABLE		EXPANTEL	ACA00044-N/1	141MF(50Q) BLUE

CUSTOMER		NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
DATE		2020. 05. 06.					
CUSTOMER CODE		APPROVED BY		I.C.KIM			
CABLE LENGTH TOLERANCE		CHECKED BY					
0 ~ 1000mm : +5, -0		DRAWN BY		S.Y.EUN			
1000 ~ 2000mm : +10, -0		CHECKED BY					
2000 ~ 3000mm : +15, -0		SCALE		N/S			
3000 ~ 4000mm : +20, -0		UNIT		mm			
4000 ~ 5000mm : +25, -0							
5000 ~ : +10%							



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE		CABLE ASS'Y	
A4	DWG NO.	CF01498-7/1	
	DETAIL NO.		
	REVISION	I R	SHEET