


1. 마킹 튜브 길이가 길면 2줄로 작업

2. 본딩튜브 파이프 적용부분 부터 적용

3. BACK NUT Roctite 도포 후 체결할 것

REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	S.Y.EUN	I.C.KIM	2021. 06. 21

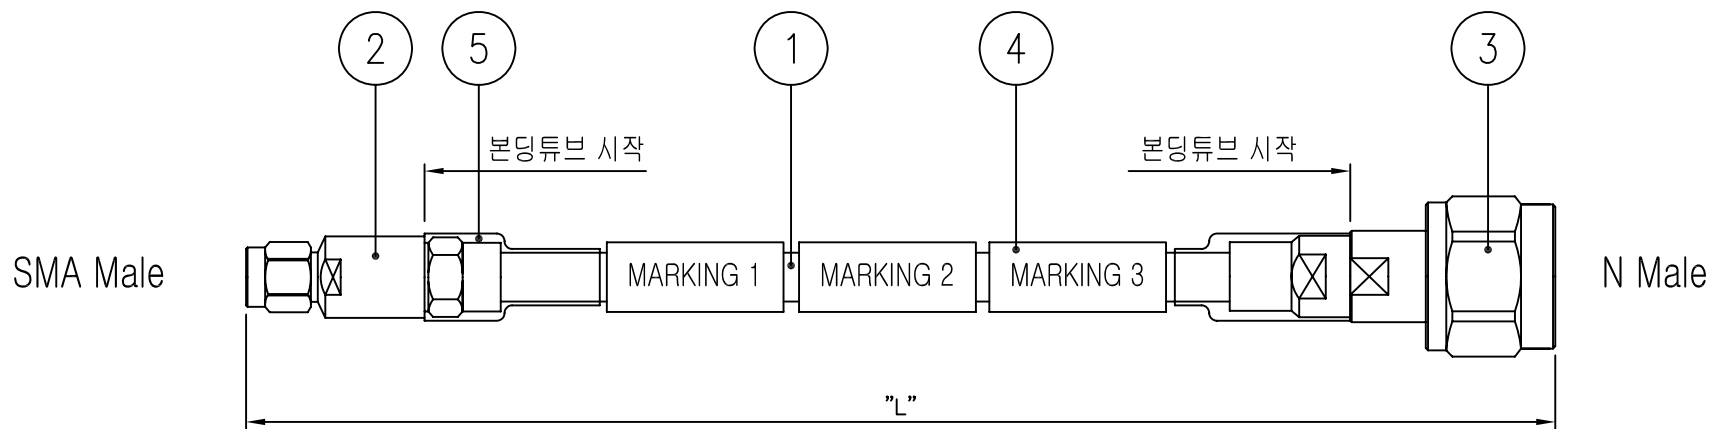

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.3
4. INSERTION LOSS (Min) : Meter당 1dB이하

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA PS----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. N PS----▶▷BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

5	BONDING TUBE	2	LS TUBE GSHS-3635W	ATU00405-N/1	ø12.7-30mm (Black)
4	MARKING TUBE	3	LS TUBE GSHS-1635F	ATU00407-N/1	ø8-40mm (White)
3	CONNECTOR	1	KJ COMTECH	CN03976-7/1	N50 PS
2	CONNECTOR	1	KJ COMTECH	CN03667-7/1	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00449-N/1	LH21r (BLUE)

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2021. 06. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
CUSTOMER CODE	APPROVED BY	I.C.KIM		TITLE CABLE ASS'Y		
	CHECKED BY					
	DRAWN BY	S.Y.EUN				
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			DWG NO. CF01567-7/1 DETAIL NO. REVISION I R SHEET 1 of 1		
	SCALE	UNIT				
	N/S	mm				
					A4	