

ELECTRICAL DATA :




1. IMPEDANCE : 50Ω (Nominal)
2. FREQUENCY RANGE : 160~170MHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 10. 22.

■NUT, WASHER 별도포장 할 것

■커넥터 커팅 방향 주의하여 작업 요망

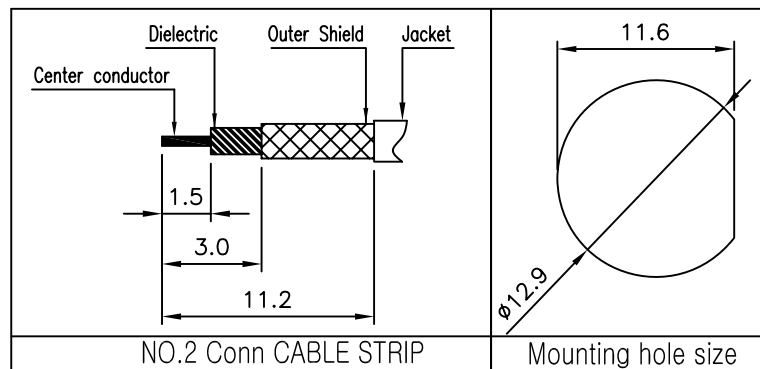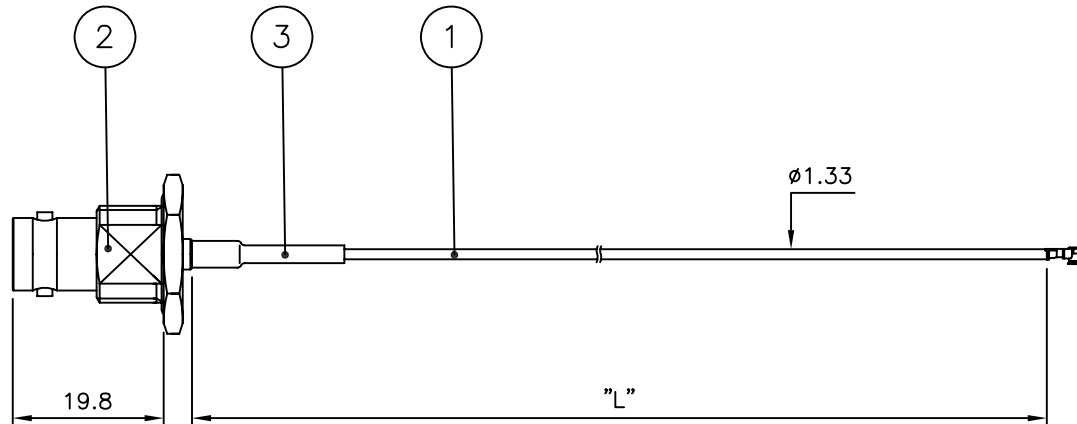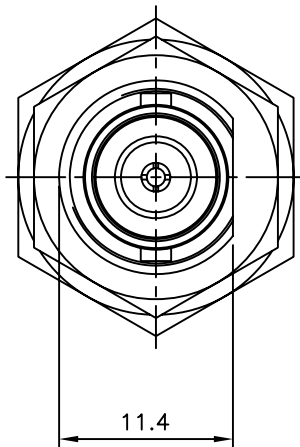

NO.2 Conn CABLE STRIP

Mounting hole size

CUSTOMER	3	BONDING TUBE	1	LS TUBE	ATU00003-N/1	φ3-20mm (Black)
	2	CONNECTOR	1	KJ COMTECH	CN00932-7/1	BNC50 JB
	1	COAXIAL CABLE		M-SOLUTION	ACA00357-N/1	MHF1 (=MCB,U,FL)
CUSTOMER CODE	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE	2021. 10. 22.				
	APPROVED BY	I.C.KIM				
CABLE LENGTH TOLERANCE	CHECKED BY					
	DRAWN BY	S.Y.EUN				
	CHECKED BY					
SCALE	N/S	UNIT	mm	A4		
				DWG NO.	CF01597-7/1	
				REVISION	I R	SHEET 1 of 1

CABLE LENGTH TOLERANCE
0 ~ 1000mm : +5, -0
1000 ~ 2000mm : +10, -0
2000 ~ 3000mm : +15, -0
3000 ~ 4000mm : +20, -0
4000 ~ 5000mm : +25, -0
5000 ~ : +10%



TITLE

CABLE ASSY

DWG NO.

CF01597-7/1

DETAIL NO.

REVISION

I R

SHEET

1 of 1