
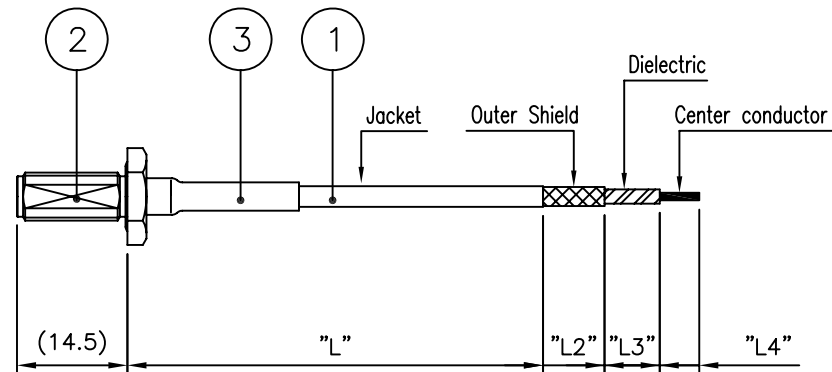


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : 950MHz ~ 2150MHz
3. VSWR (Max) : 1.2

* 커넥터 끝단 기준 양단 ASSY 작업하여 특성 확인 후 절단할 것

■ NUT, WASHER 별도포장 할 것

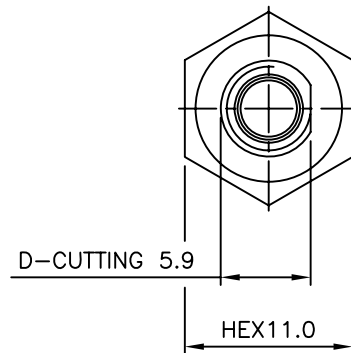

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 JB-----▶ BODY : Gold Plating
CONTACT : Gold Plating

REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 10. 22.

3	BONDING TUBE	1	LS TUBE	ATU00004-N/1	Ø4-20mm (Black)
2	CONNECTOR	1	KJ COMTECH	CN00098-7/1	SMA50 JB (F/N)
1	COAXIAL CABLE		EXPANTEL	ACA00211-N/1	85FJ(50Ω) BLUE (Jacket : PVC)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE 2021. 10. 22.

CUSTOMER
CUSTOMER CODE
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%

APPROVED BY	I.C.KIM
CHECKED BY	
DRAWN BY	S.Y.EUN
CHECKED BY	
SCALE	UNIT
N/S	mm



TITLE		CABLE ASS'Y	
A4	DWG NO.	CF01598-7/1	
	DETAIL NO.		
	REVISION	I R	SHEET