


CF01620-7/1

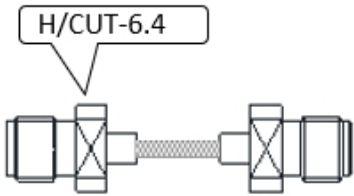

SMA-JS+SMA-JS
+47F

SMA JS 47TP ↔
BO/GO, PI/GO

CF01620-7/1 100mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor

- ☒ E5071B (~8.5GHz)
☐ ZND (~8.5GHz)
☐ ZVA50 (~50GHz)
- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☐ 2.4mm Male to 2.4mm Male
50GHz Cable

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3 : Insertion Loss (S21)

