

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES


- 2-1. SMA PS-----▶▶BODY : Gold Plating
CONTACT : Gold Plating
CAP : Nickel Plating
- 2-2. SMP PS-----▶▶BODY : Gold Plating
CONTACT : Gold Plating
RING : Gold Plating

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~14GHz


REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022.10.14.
1	SMA 커넥터 구성 및 탈피도 변경건	S.H.KIM		2022.12.29.

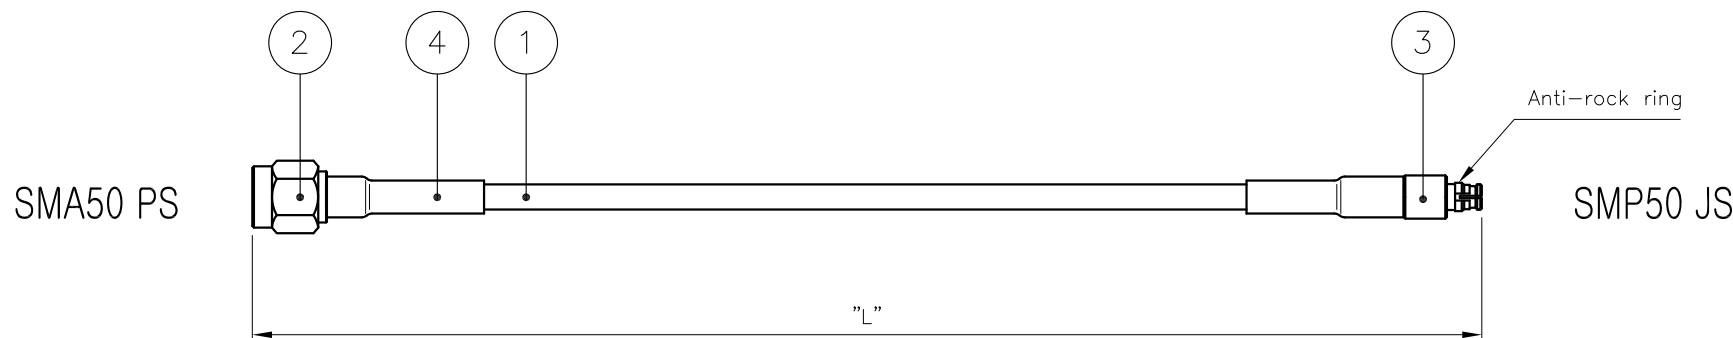

1. 중국 Samkoon 탈피기 사용하여 [3.4mm 셋팅] 후 심선 1단 탈피 한다.
(설비 관리코드 : M-005-011)

2. 핀 납땜한다. (참고)

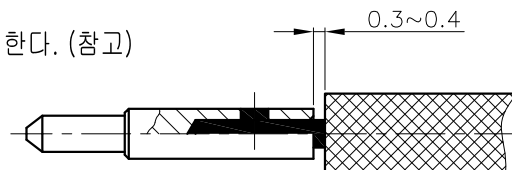

SMA CONN CABLE 탈피

1. 중국 Samkoon 탈피기 사용하여 [3.5mm 셋팅] 후 심선 1단 탈피 한다.
(설비 관리코드 : M-005-011)

SMP CONN CABLE 탈피

4	SHRINK TUBE	2	LS TUBE	ATU00056-N/1	Ø4-20 Black
3	CONNECTOR	1	KJ COMTECH	CN03895-7/4	SMP50 JS
2	CONNECTOR	1	KJ COMTECH	CN02796-7/C CN02796-7/B	SMA50 PS
1	COAXIAL CABLE		EXPANTEL	ACA00036-N/1	85FJ(50Ω)-CLEAR

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS
	DATE 2022. 12. 29.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8011 Fax : 82-32-347-8011 KJ COMTECH CO.,LTD.		
CUSTOMER CODE	APPROVED BY					
	CHECKED BY					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	DRAWN BY	S.H.KIM		A4 DWG NO. CF01660-7/1 DETAIL NO. REVISION 1 SHEET 1 of 1		
	CHECKED BY					
	SCALE	UNIT				
	N/S	mm				



TITLE CABLE ASS'Y