

ELECTRICAL DATA :




1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4.5GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 5.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 1.0\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2022.12.01.

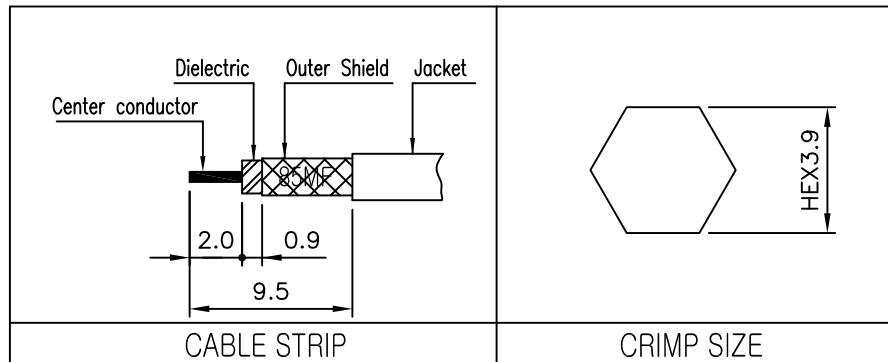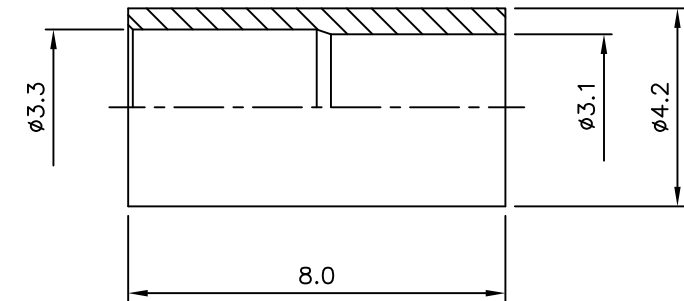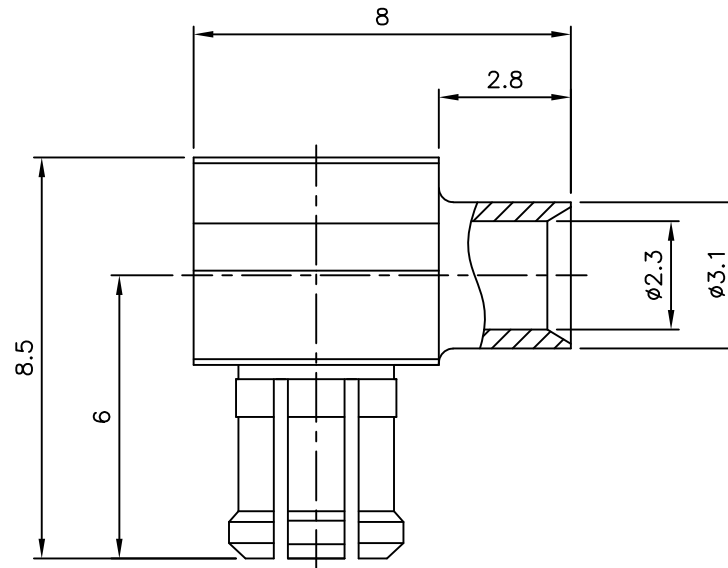

6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00013-5/1
5	INSULATOR	1	TEFLON		DIN00933-N/1
4	INSULATOR	1	TEFLON		DIN02965-N/1
3	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00161-5/2
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00069-5/1
1	1-2 JACK BODY	1	BeCu C17300	Gold Plate	DJA00010-4/3
	1-1 BODY	1	MBsBD C3604BD-F		DBD03204-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2022. 12. 01.			 COMTECH KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY					
MATERIAL _____		CHECKED BY			TITLE MCX50 CABLE PL 85MF		
		DRAWN BY S.H.KIM					
FINISH _____		SCALE 6/1	UNIT mm		A4	DWG NO. CN00034-7/4	
						REVISION I R	SHEET 1 of 1