

CN00113-7/1

CN00113-7/1

CIRCLE/HEX-8

1/4*36



SMA JB (F/F)

B:7.3-2.2-5

TP:0-0-1.3-3

BODY/Nickel PIN/Gold

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

■_1.0GHz	- 1.00, 1.01, 0.08
■_2.0GHz	- 1.01, 1.01, 0.12
■_3.0GHz	- 1.04, 1.05, 0.17
■_4.0GHz	- 1.07, 1.07, 0.19
■_5.0GHz	- 1.09, 1.10, 0.22
■_6.0GHz	- 1.16, 1.17, 0.19
■_7.0GHz	- 1.21, 1.22, 0.26
■_8.0GHz	- 1.25, 1.27, 0.30

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male




□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)



1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CN00113-1

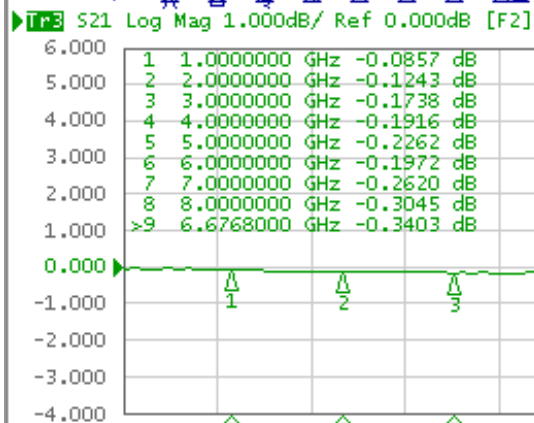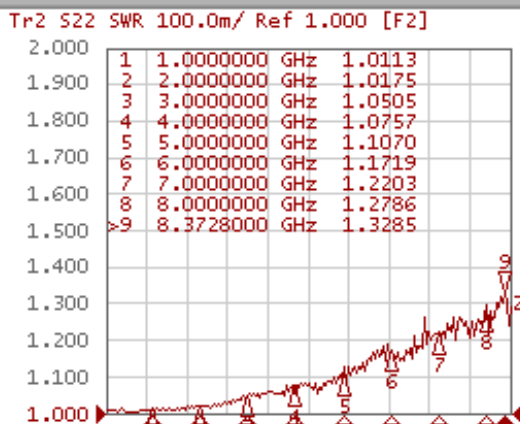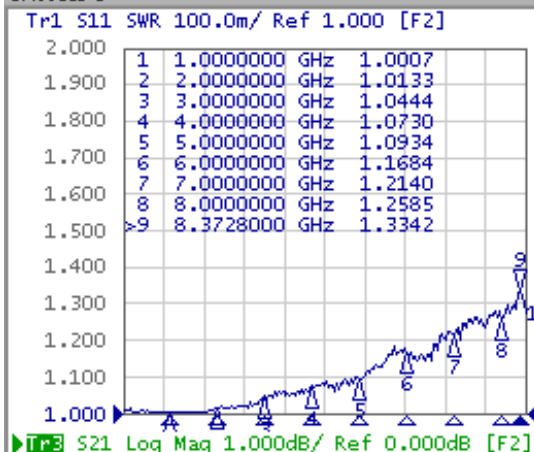

1 Start 20 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas

Stop

ExtRef

Ready

Svc

2020-02-25 11:25

Display

Num of Traces

3

Allocate Traces

Display Data

Data -> Mem

Data Math OFF

Equation Editor...

Equation OFF

Edit Title Label

Title Label ON

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)