
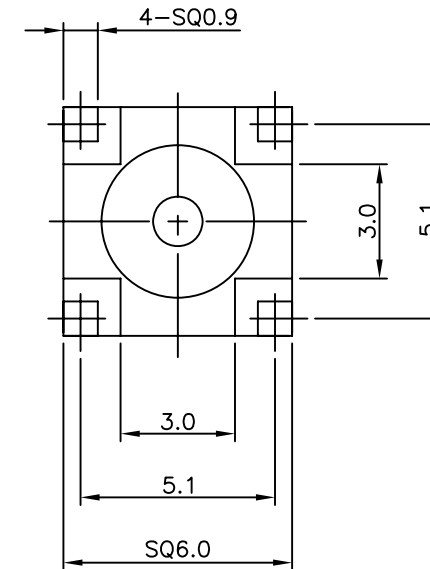


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.08.14.

1/4-36 UNS-2A

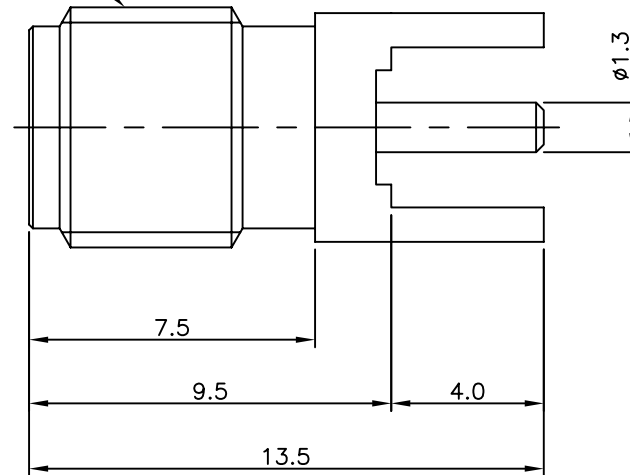

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -65°C ~ +85°C


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2
4. INSULATION RESISTANCE : 5000MΩ (min)
5. INTERFACE : MIL-C-39012

MECHANICAL DATA :

1. RECOMMENDED COUPLING NUT TORQUE : 0.8Nm~1.1Nm
2. Durability : 500 Mating

3	INSULATOR	1	TEFLON		DIN02657-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT00206-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD00302-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 08. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 PCB JS-4R
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	 A4
		UNIT	mm	
		DWG NO.	CN00164-7/2	REVISION I R SHEET 1 of 1
		REVISION	I R	