


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2014.12.02.

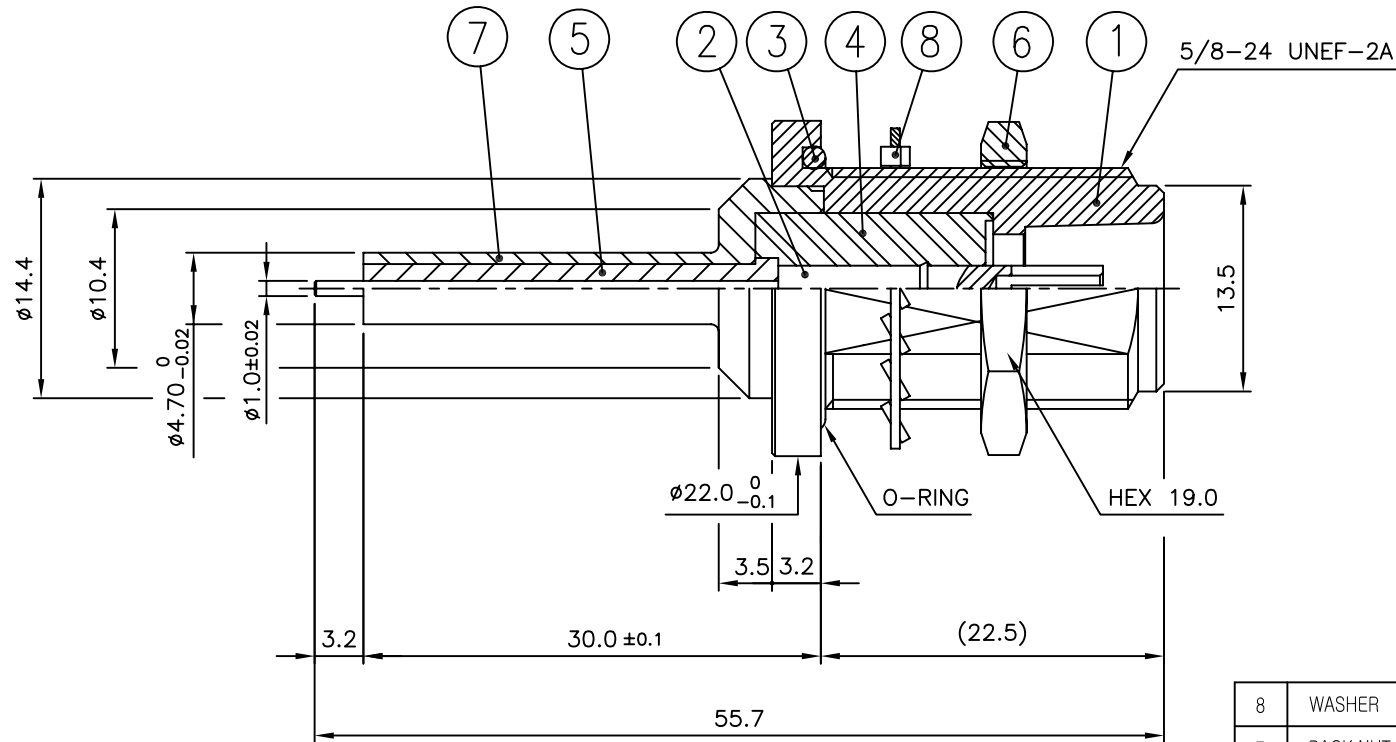

Notes

1. Electrical
 - 1.1 Frequency range : DC~6GHz
 - 1.2 VSWR(Max) : 1.2
2. ENVIRONMENTAL (PER MIL-STD-202)
 - 2.1 Operation Temperature range : -40°C to +70°C
 - 2.2 Degree of Protection : IP67
3. Material & Finish
 - 3.1 BODY, NUT, WASHER : BRASS / Nickel Plated
 - 3.2 Center Pin : Beryllium copper / Gold Plated
 - 3.3 Insulator : PTFE

8	WASHER	1	MBsBD C3604BD-F	Nickel Plate	DWA00045-5/1
7	BACK NUT	1	MBsBD C3604BD-F	Nickel Plate	DBN00191-5/1
6	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00093-5/1
5	INSULATOR	1	TEFLON		DIN02499-N/1
4	INSULATOR	1	TEFLON		DIN02500-N/1
3	GASKET	1	SILICON		DGK00042-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03310-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03792-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2014. 12. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE N50 SOLDER JB (F/N)
		DRAWN BY	H.J.LEE	
FINISH		SCALE	2/1	DWG NO. CN00471-7/2 REVISION I R SHEET 1 of 1
		UNIT	mm	