
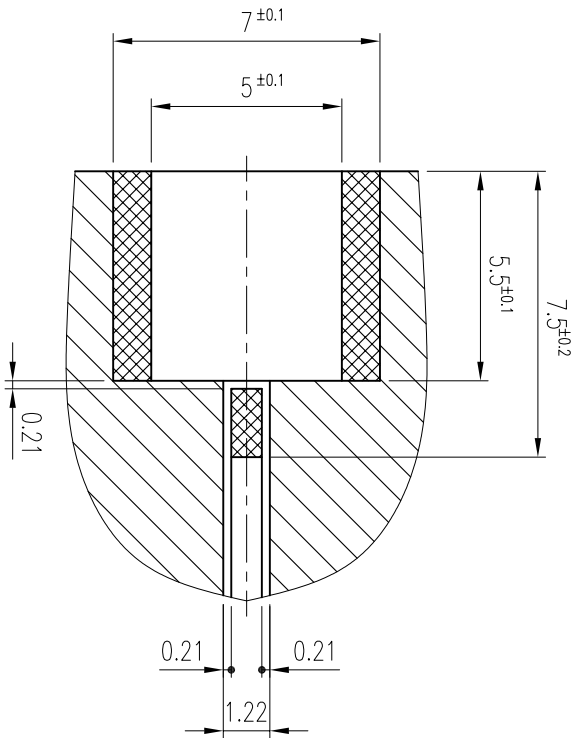
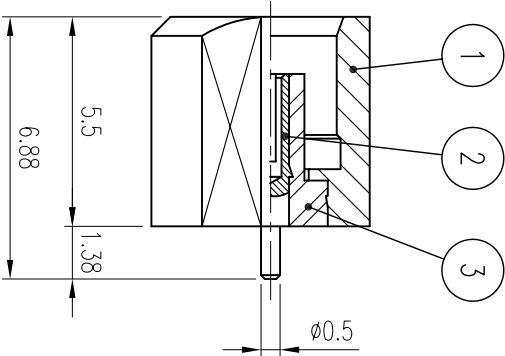


REVISION										DATE	
DESCRIPTION											
REV											
ST (Old)											
ST (Rev)											

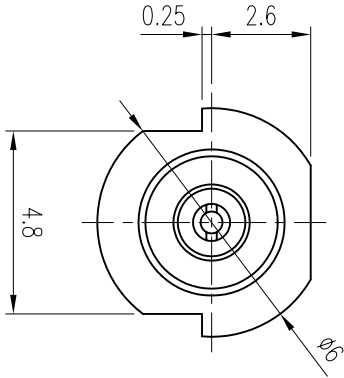

RECOMMENDED
MOUNTING HOLE

NOTES : FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. BERYLLIUM COPPER PER QQ-C-530
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468
6. Engagement force : ≤ 25 N
7. Disengagement force : 8 N ~ 20 N

CUSTOMER	3		INSULATOR		1		TEFLON		DM00024-N/1 (H1179)		
	2		CONTACT		1		BeCu		Gold Plate DCT00037-5/1 (E1197)		
	1		BODY		1		NBSBD		Gold Plate DBD00083-5/1 (D1180)		
	NO.		DESCRIPTION		QTY		MATERIAL		PLATING		REMARKS
CUSTOMER CODE	DATE		2006. 5. 30.								
	APPROVED BY										
CUSTOMER CODE	CHECKED BY										
	DRAWN BY										
	SCALE		UNIT		WEIGHT						
	4/1		mm		—						
						A4					
								DWG. NO.		CN00720-7/1	
										K313-317-010	