

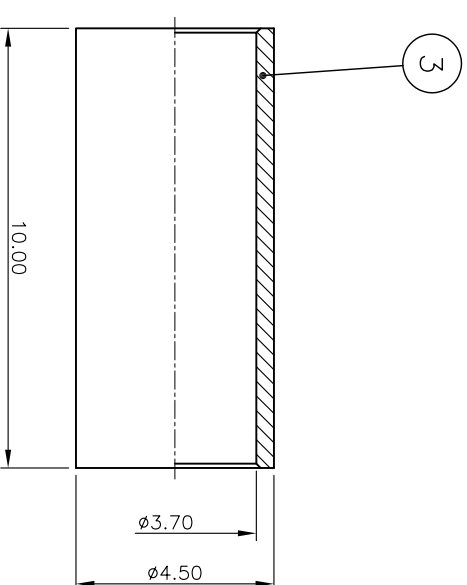


REVISION			DATE
REV	DESCRIPTION		
IR	최초 개정	2006. 09. 26.	
A	신뢰성 향상(설번No.2007-004) (삼,이탈력값 기록 및 관리)	2007. 01. 08.	

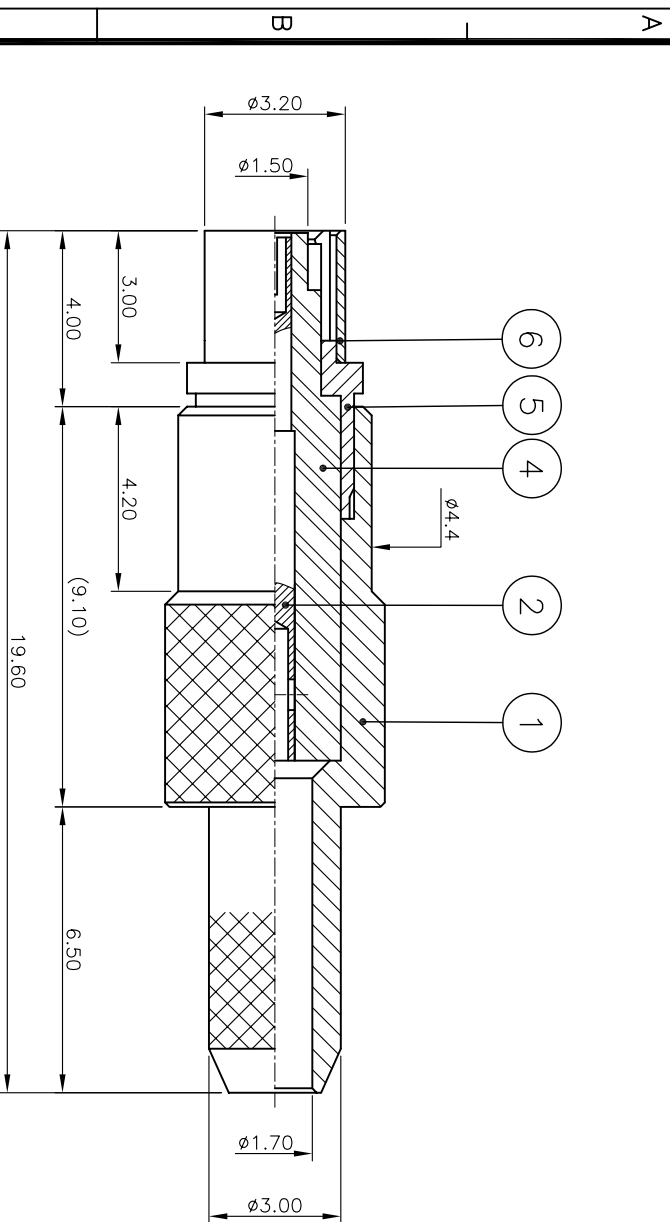

△ * 삼, 이탈력 TEST
 1. 삽입력 : 1kgf ±0.2kgf
 2. 이탈력 : 0.6kgf ±0.2kgf

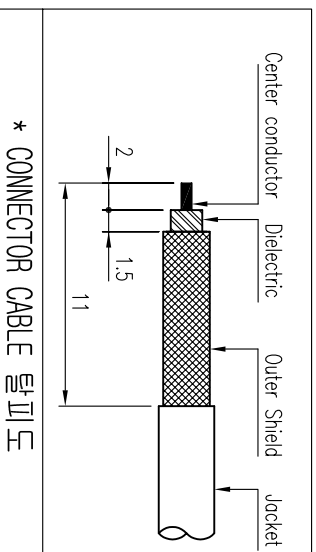

* CONNECTOR CABLE 탈피도

NO.	DESCRIPTION	QTY	MATERIAL	PLATING	CODE
6	CAP	1	MBSBD	Nickel Plate	DCU00101-5/1 (KV004)
5	JACK	1	BeCu	Nickel Plate	DJA00084-5/1 (JV005)
4	INSULATOR	1	TEFLON	White	DIN01012-N/1 (HW008)
3	FERRULE	1	MBSBD	Nickel Plate	DFE00043-5/1 (F6007)
2	CONTACT	1	BeCu	Gold Plate	DCT01083-5/1 (EV007)
1	BODY	1	MBSBD	Gold Plate	DBD01433-5/1 (DV004)

		DATE		2007. 01. 08.		 KJ COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
TOLERANCE	Decimal	±0.1		APPROVED BY		S.J.YOUN	
	Angle	±1°		CHECKED BY		I.C.KIM	
MATERIAL	-		DRAWN BY		E.H.KIM		TITLE U.FL(MCB)-JC-FUJIKURA
FINISH	-		SCALE	UNIT			
	-		6/1	mm			
A4		DWG NO. CN00902-7/2 (K51-001-000)		REVISION		I R	SHEET 1 of 1

KJ COMTECH
 KJ COMTECH CO., LTD.
 RF & MICROWAVE TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017

TITLE
U.FL(MCB)-JC-FUJIKURA
 DWG NO. CN00902-7/2 (K751-001-000)
 REVISION 1 R SHEET 1 of 1