


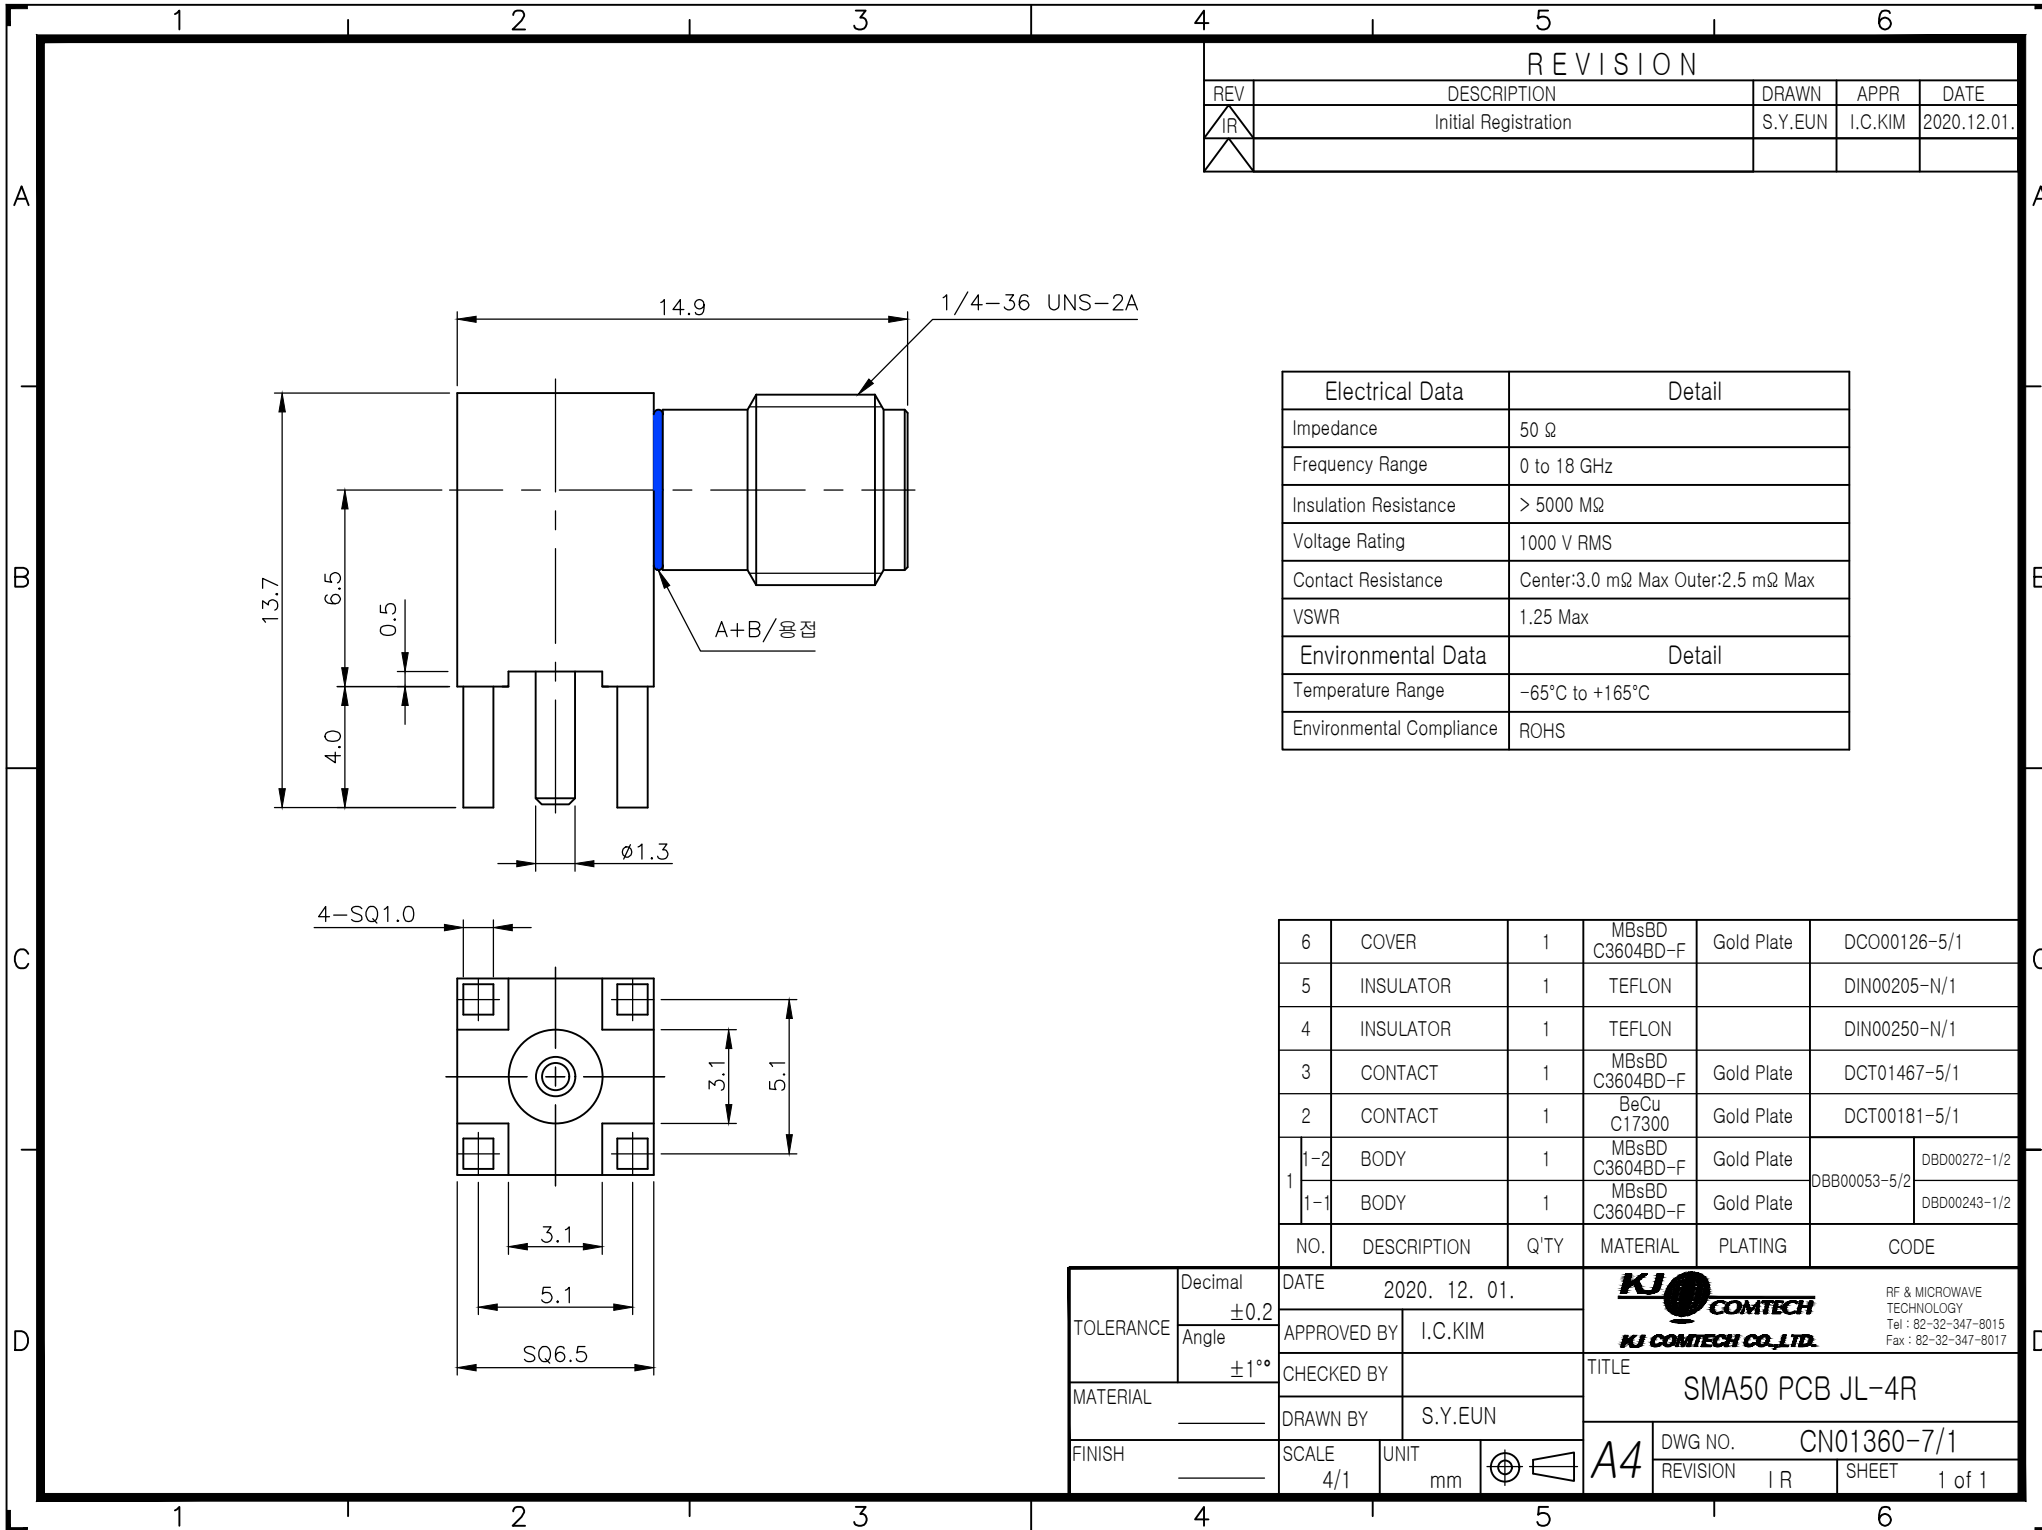

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.12.01.

Electrical Data	Detail
Impedance	50 Ω
Frequency Range	0 to 18 GHz
Insulation Resistance	> 5000 M Ω
Voltage Rating	1000 V RMS
Contact Resistance	Center:3.0 m Ω Max Outer:2.5 m Ω Max
VSWR	1.25 Max
Environmental Data	Detail
Temperature Range	-65°C to +165°C
Environmental Compliance	ROHS

		6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00126-5/1		
		5	INSULATOR	1	TEFLON		DIN00205-N/1		
		4	INSULATOR	1	TEFLON		DIN00250-N/1		
		3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT01467-5/1		
		2	CONTACT	1	BeCu C17300	Gold Plate	DCT00181-5/1		
		1	1-2	BODY	1	MBsBD C3604BD-F	Gold Plate	DBB00053-5/2	DBD00272-1/2
			1-1	BODY	1	MBsBD C3604BD-F	Gold Plate		DBD00243-1/2
				NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	Angle	APPROVED BY		I.C.KIM					
MATERIAL		CHECKED BY		TITLE					
		DRAWN BY							
FINISH		SCALE	UNIT	A4					
		4/1	mm						
				DWG NO.		CN01360-7/1			
				REVISION		I R	SHEET		
							1 of 1		