
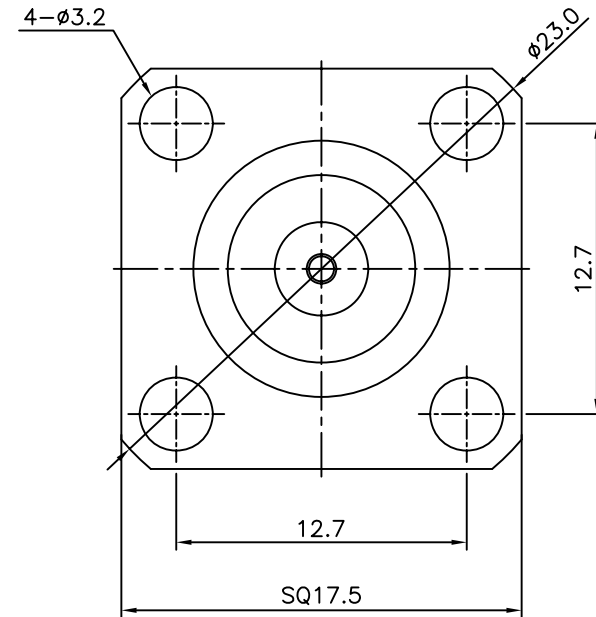


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.05.14.

5/8-24 NEF-2A

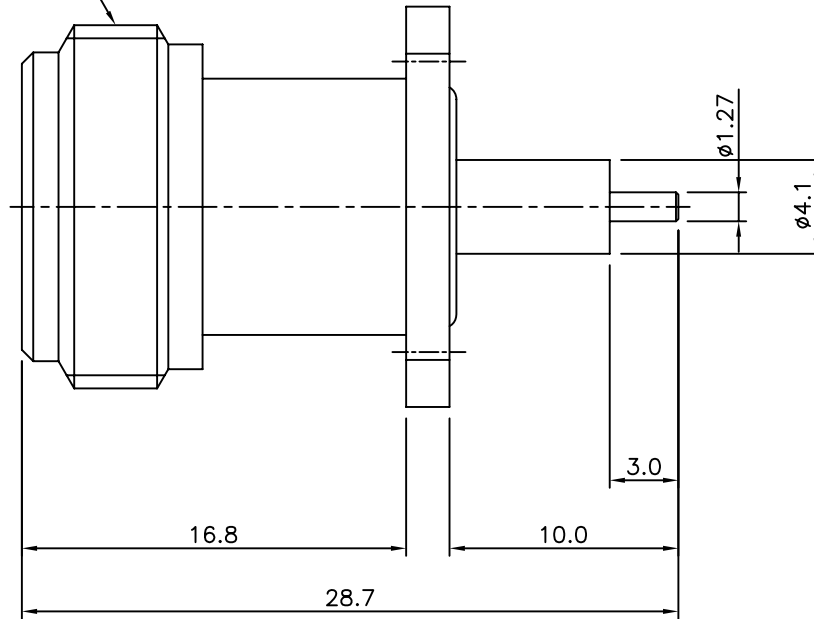

*ELECTRICAL

Impedance : 50 Ohm
Freq. Range : DC to 6 GHz
Working Voltage :500 Vrms @Sea level
Dielectric Withstand Voltage : 1500Vrms
Insulation Resistance :5000 MOhms Min
Contact Resistance (center):2.0 mohm
(outer):3.0 mohm


*MECHANICAL

Interface Dimensions : MIL-STD-348
Force to Engage and Disengage : N/A
Coupling Nut Retention Force and Proof Torque N/A
Connector Durability : 500 mating cycles min.

*ENVIRONMENTAL

Temp. Range : -65°C to +125°C
Thermal Shock : MIL-STD-202, Method 107, Test Cond. B
Vibration : MIL-STD-202, Method 204, Test Cond. D
Shock : MIL-STD-202, Method 213, Test Cond. I

4	GASKET	1	SILICONE	RED	DGK00269-N/2
3	INSULATOR	1	TEFLON		DIN03220-N/1
2	CONTACT	1	BeCu C17300	Gold Plate (1.27μm)	DCT04216-5/1
1	BODY	1	SUS	Passivated	DBD01973-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 05. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE N50 SOLDER END JS-4H
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	3/1	DWG NO. CN01380-7/F
		UNIT	mm	REVISION I R
				SHEET 1 of 1