
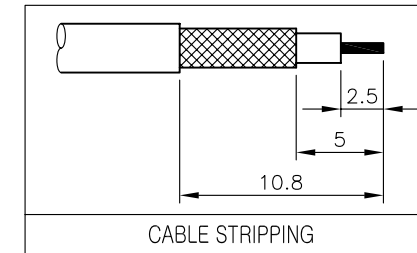


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	S.J.YOUN	2008. 03. 12.
1	[설번No.200912-0010] 업체요구 (포장사양 추가)	E.H.KIM	S.J.YOUN	2009. 12. 15.
2	[설번No.201006-0002] 업체요구 (BOM구성에서 FERRULE 제거)	I.C.KIM	Y.H.CHOI	2010. 06. 01.
3	[설번No.201008-0009] 업체요구 (BOM구성에서 CONTACT 제거)	E.H.KIM	I.C.KIM	2010. 08. 19.

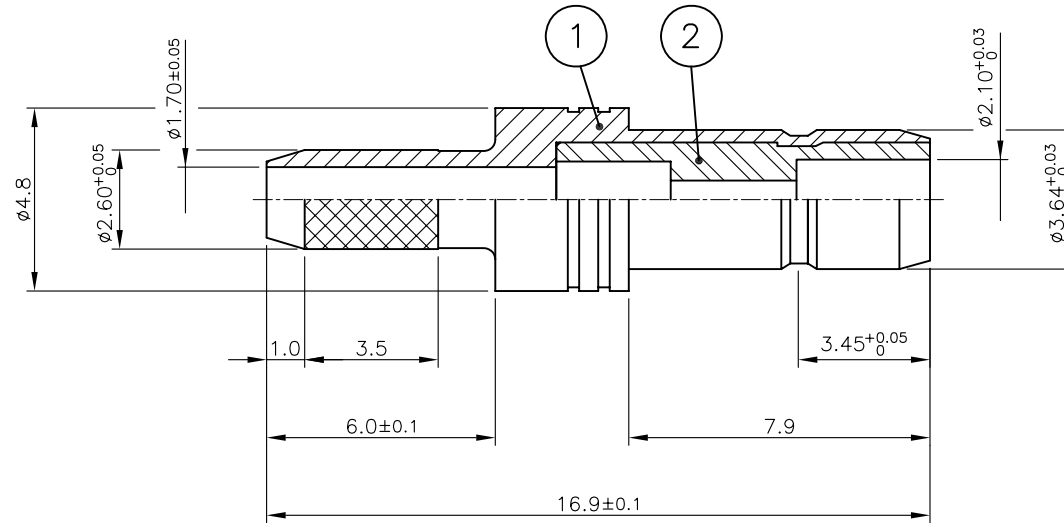

주 기

1. 상대물과의 삽입력과 이탈력 (상대물과 Mating 5회 이후 측정치)

- 삽입력 : 2~4Kgf
- 이탈력 : 5~8Kgf

2. 상대물 Male Jack 내경 $\phi 3.44 \sim 3.45$ 관리

3. 도금 사양

내장용(실내)


- Nickel Plate : $5\mu m$ 이상 (BODY)
- Gold Plate : $0.4\mu m$ 이상 (CONTACT)

4. 포장 사양

- 품번③번 포장봉투에 완제품 100EA 포장

5. 인쇄 사양

- 품번③번 인쇄시 테두리, 글씨 녹색으로 할것.

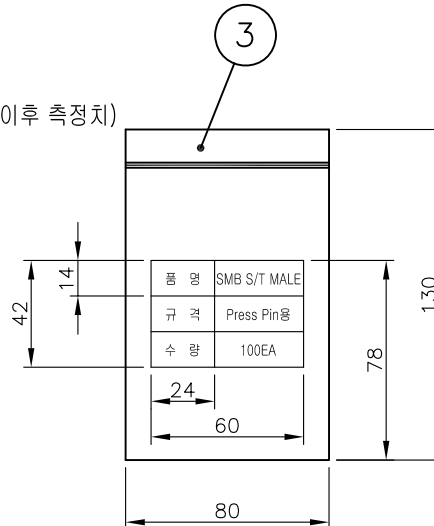

1	3	포장봉투	1	Polyester		DVB00027-N/1
	2	INSULATOR	1	PTFE		DIN01206-N/2
	3	FERRULE	1	MBsBD	Nickel Plate 2~3μm	DFE00034-5/2
	2	CONTACT	1	MBsBD	Gold Plate 0.4μm	DCT01325-5/1
	1	BODY	1	MBsBD	Nickel Plate 5μm	DBD00435-5/1
				C3604BD-F		
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2010. 08. 19.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL		CHECKED BY	-
		DRAWN BY	E.H.KIM
FINISH		SCALE	5/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY	
		Tel : 82-32-347-8015 Fax : 82-32-347-8017	
TITLE		SMB50 CABLE JS RG316(PRESS)	
		(SMB S/T MALE(신형))	
A4	DWG NO.	CN01525-7/1	
	REVISION	3	SHEET 1 of 1