

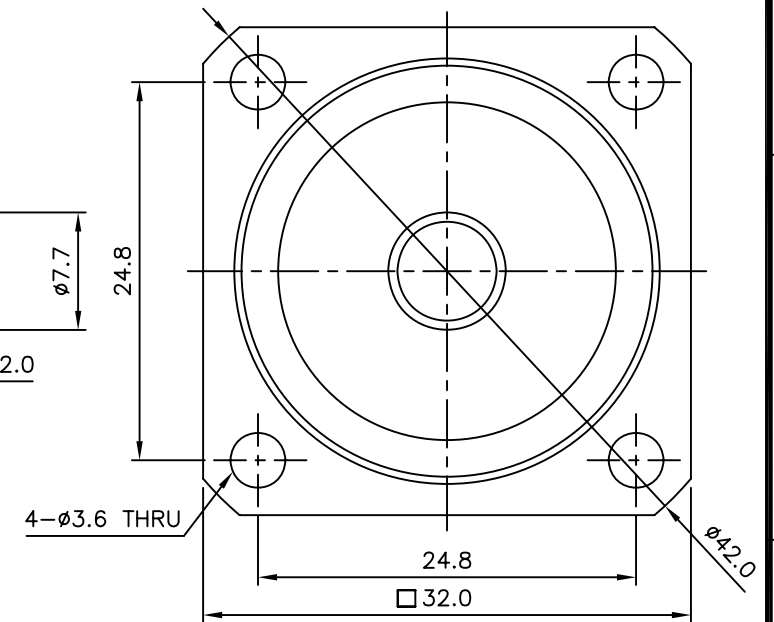
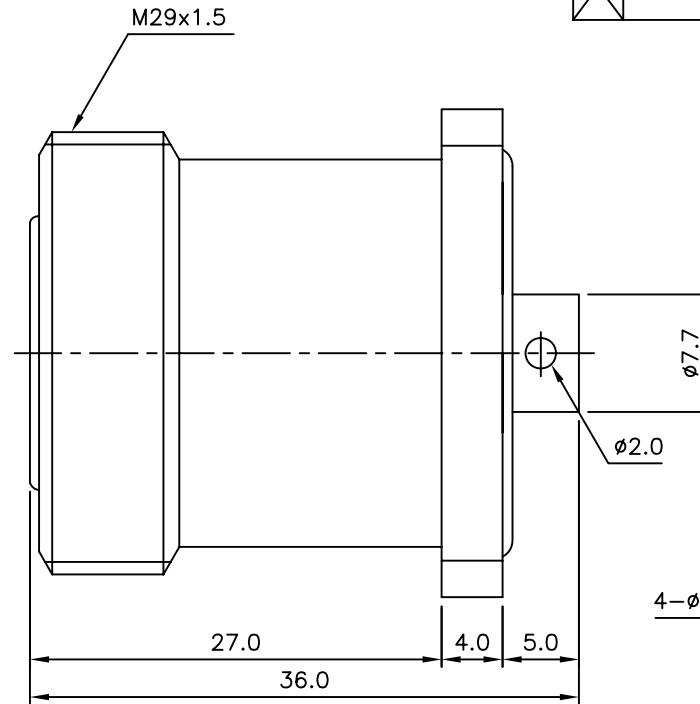
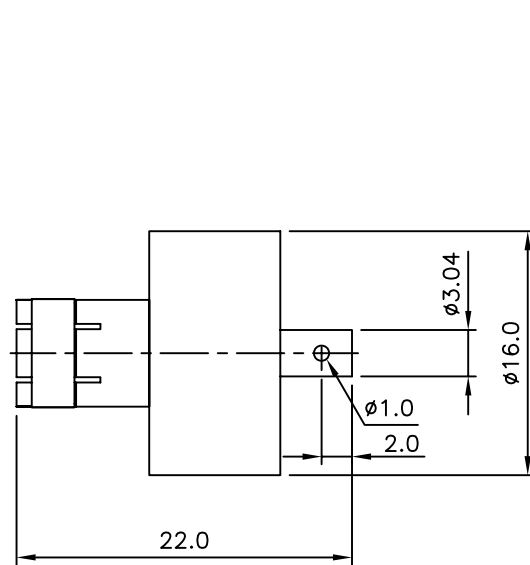


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.07.26.

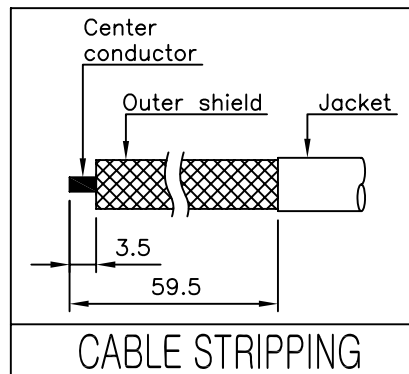

END CAP 조립 후 포장 할 것.



* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω
Frequency Range : DC~3GHz
V.S.W.R : ≤1.15 max
PIM : ≤-123 dBm (2x43dBm)
Insulation resistance : ≥1000 MΩ
Dielectric withstanding voltage : 1200 V
Power : 200 W

8	END CAP	1	PLASTIC	White	DGK00113-N/1
7	RING	1	BeCu C17300	Silver Plate (7μm)	DSR01054-5/2
6	INSULATOR	1	TEFLON		DIN02049-N/1
5	GASKET	1	SILICONE RUB		DGK00194-N/1
4	GASKET	1	SILICONE RUB		DGK00199-N/1
3	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3μm)	DCT02734-5/1
2	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD03231-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD03233-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 07. 26.	
	Angle	APPROVED BY	I.C.KIM
MATERIAL	±1°	CHECKED BY	
		DRAWN BY	S.Y.EUN
FINISH		SCALE	UNIT
		2/1	mm



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE		7/16 DIN50 CABLE JS-4H 250	
A4	DWG NO.	CN02063-7/4	
	REVISION	I R	SHEET 1 of 1