


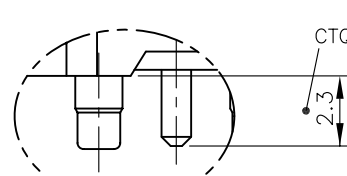



** Keying Type & Color Table



Fig.			
Type	C	D	I
Color	Blue	Bordeaux	Beige

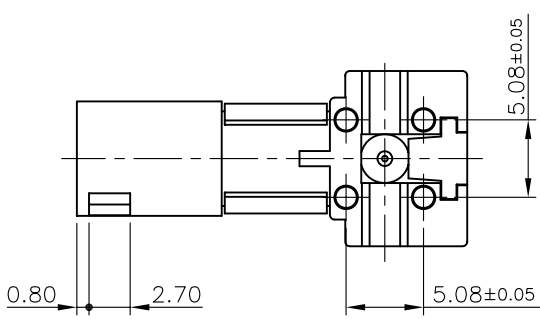


확대도 "A"

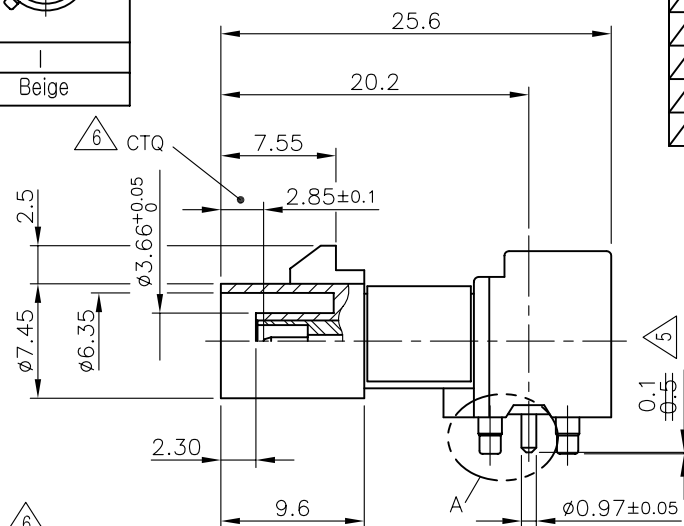

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM	J.H.YOUN	2009.08.27.
1	특성 개선 내부 구조 변경 및 커버 조립부 변경	I.C.KIM	Y.H.CHOI	2010.02.01.
2	[설변 No.201005-0024] 고객요청 - 절연체 형상 변경	I.C.KIM	Y.H.CHOI	2010.05.27.
3	[설변 No.201006-0011] 고객요청 - 커버 조립부 형상 변경	I.C.KIM	Y.H.CHOI	2010.06.14.
4	[설변 No.201101-0004] 고객요청, 신뢰성 향상 (제품형상 변경 및 납땜성 보완 커버 변경)	I.C.KIM	Y.H.CHOI	2011.01.05.
5	고객사 요청 - 핀 HOLE 개선 PCB 다리 리드부 길이 수정	E.H.KIM	I.C.KIM	2012.04.27.
6	[설변 No.201501-0018] 고객요청으로 인한 CTQ 추가	H.J.LEE	I.C.KIM	2015.01.29.
7	[설변 No.201502-0006] 슬리브 변경	S.M.LEE	I.C.KIM	2015.02.16.

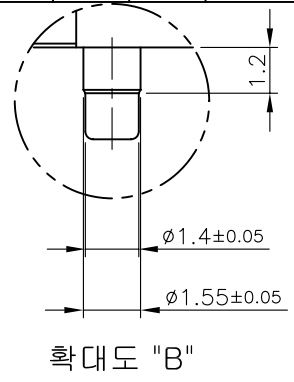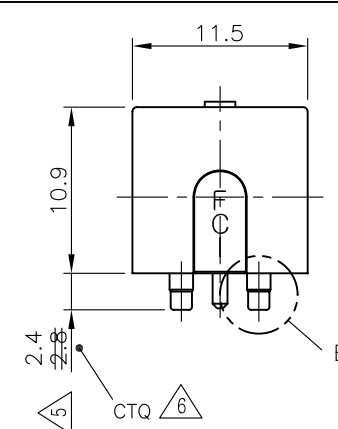

확대도 "B"

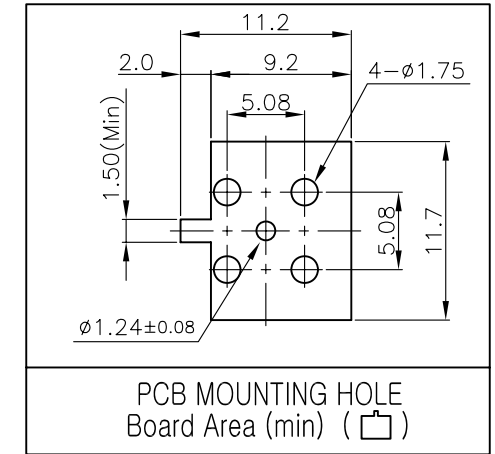

NOTE

1. MATERIALS AND FINISHES

A. BODY, CAP - ZINC Alloy /
Tin Plated (0.8μm MIN), Nickel Plated (1.0μm MIN)

B. CONTACT - BRASS / Gold Plated (0.03μm MIN)

C. INSULATOR - PTFE Teflon

D. COLOR RING - NYLON66

2. ELECTRICAL

A. IMPEDANCE : 50Ω Nominal

B. FREQUENCY RANGE DC ~ 4GHz

C. DIELECTRIC WITHSTANDING VOLTAGE : 1000 VRMS MIN

3. MECHANICAL

A. DURABILITY : 100 CYCLES

B. TEMPERATURE RANGE : -40°C ~ 100°C

TOLERANCE Decimal .X = ±0.2 .XX = ±0.1	Angle ±1°	DATE 2015. 02. 16.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
		APPROVED BY	I.C.KIM					
MATERIAL		CHECKED BY			TITLE FAKRA-JL-4R-R ("D" TYPE)			
		DRAWN BY	S.M.LEE					
FINISH		SCALE	UNIT		A4	DWG NO.	CN02452-7/4	
		2/1	mm			REVISION	7	SHEET