

주 기.

1. 상대물과 삽입력과 이탈력 (상대물과 Mating 5회 이후 측정치)


- 삽입력 : 2~4kgf
- 이탈력 : 5~8kgf

2. 상대물 Male Jack 내경 $\phi 3.44 \sim 3.45$ 관리

3. 도금 사양

내장용(실내)

- Nickel Plate : $5\mu\text{m}$ 이상 (BODY, JACK, COVER)
- Gold Plate : $0.4\mu\text{m}$ 이상 (CONTACT)

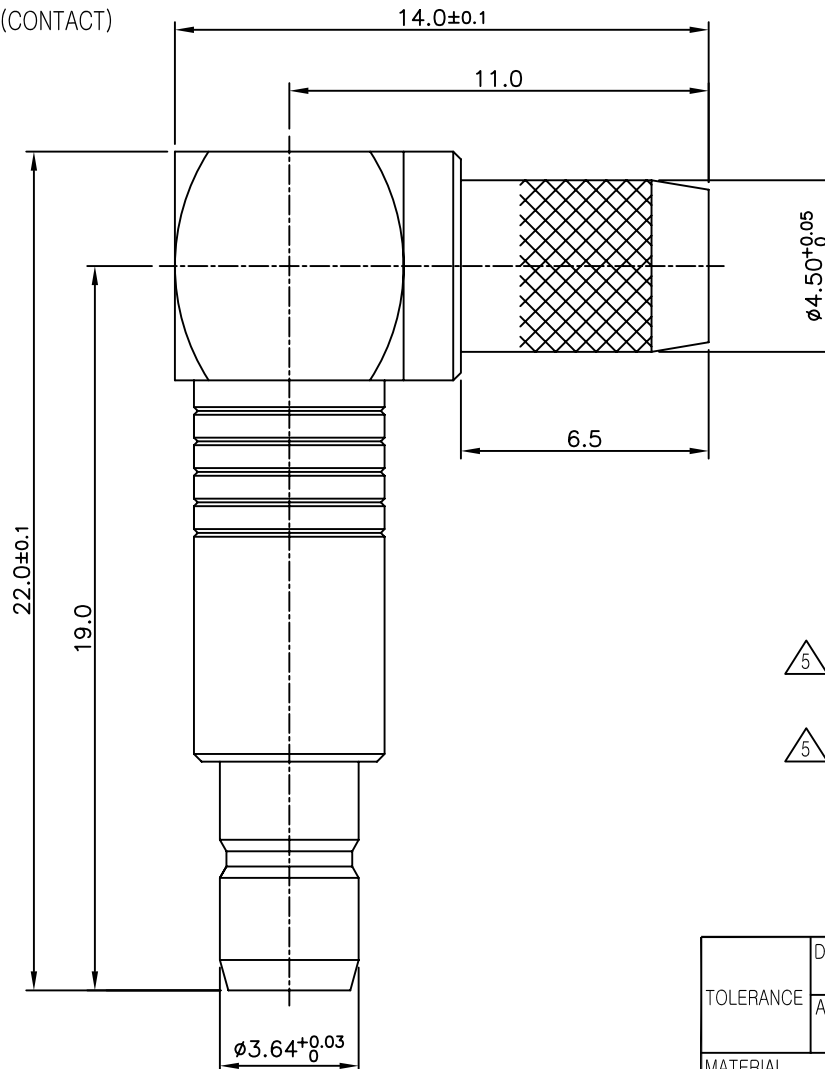

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2012.01.09.
1	[설번No.201302-0010] 기타 (4번 INSULATOR 구성 변경)	I.C.KIM	I.C.KIM	2013.02.26.
2	[설번No.201302-0011] 업체요청 (FERRULE 변경)	E.H.KIM	I.C.KIM	2013.02.27.
3	[설번No.201303-0003] 기타 (FERRULE 삭제)	E.H.KIM	I.C.KIM	2013.03.07.
4	[설번No.201310-0013] 업체요청 (COVER, INSULATOR BOM구성 삭제)	E.H.KIM	I.C.KIM	2013.10.28.
5	[설번No.201501-0016] 요청으로 인한 COVER, INSULATOR, FERRULE BOM구성 등록	H.J.LEE	I.C.KIM	2015.01.22.

5	4	5	COVER	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DCO00020-5/1
5	4	1	INSULATOR	1	PTFE		DIN00922-N/1
			INSULATOR	1	PTFE		DIN01617-N/1
5	3	2	FERRULE	1	MBsBD C3604BD-F	Nickel Plate $2 \sim 3\mu\text{m}$	DFE00176-5/1 DFE00059-5/1
			CONTACT	1	MBsBD C3604BD-F	Gold Plate $0.4\mu\text{m}$	DCT02527-5/1
1-2			BODY	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DBB00299-5/1 DBD01407-1/1
1-1			BODY	1	MBsBD C3604BD-F	Nickel Plate $5\mu\text{m}$	DBD02998-3/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE		

TOLERANCE	Decimal ± 0.1	DATE 2015. 01. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	-	KJ COMTECH CO., LTD. TITLE SMB50 CABLE JL RG58 L/L (SMB A/G MALE LONG Ø5)
		DRAWN BY	H.J.LEE	
FINISH		SCALE	5/1	DWG NO. CN02751-7/2 REVISION 5 SHEET 1 of 1
		UNIT	mm	