




* ELECTRICAL SPECIFICATIONS
 Impedance : 50Ω
 Frequency Range : DC~13.5GHz
 V.S.W.R (MAX) : 1.3 @ 12GHz
 1.35 @ 13.5GHz
 * MECHANICAL DATA
 Coupling nut torque : 0.9~1.2 Nm

7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	COVER	1	MBsBD C3604BD-F	SUCO Plate	DCO00096-5/5
5	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
4	INSULATOR	1	TEFLON		DIN02057-N/2
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3μm)	DCT02658-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD03141-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2020. 06. 05.	
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	±0.2	CHECKED BY		
	±1°	DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	
		5/1	mm	
		TITLE		SMA50 CABLE PL 141F
		DWG NO.		CN02845-7/4
		REVISION		I R
		SHEET		1 of 1

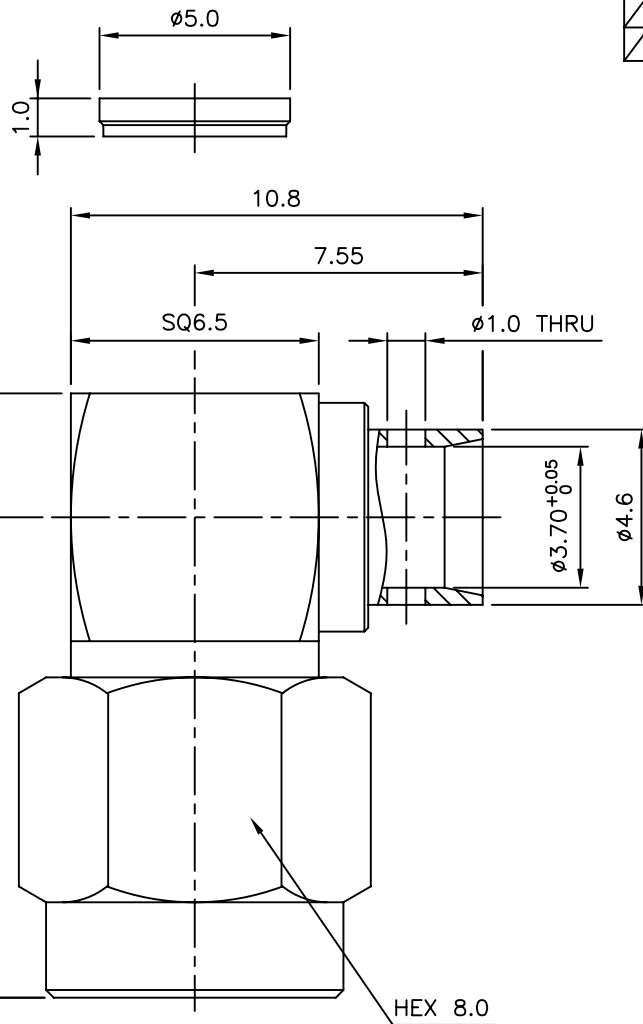

RF & MICROWAVE
 TECHNOLOGY
 Tel : 82-32-347-8015
 Fax : 82-32-347-8017