



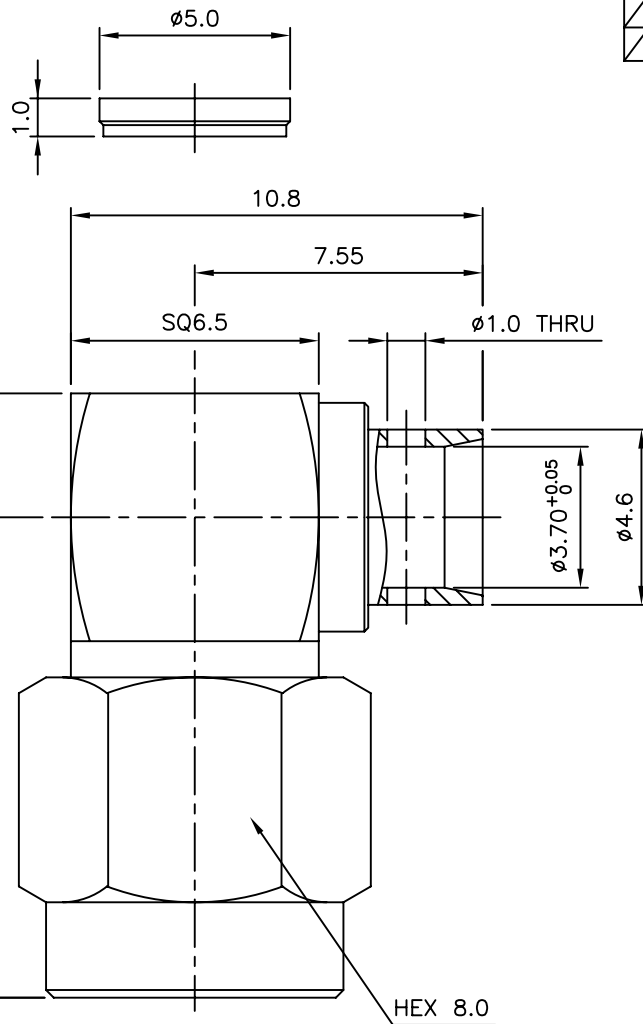

* ELECTRICAL SPECIFICATIONS
 Impedance : 50Ω
 Frequency Range : DC~13.5GHz
 V.S.W.R (MAX) : 1.3 @ 12GHz
 1.35 @ 13.5GHz
 * MECHANICAL DATA
 Coupling nut torque : 0.9~1.2 Nm

7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00096-5/3
5	CAP	1	SUS	Passivated	DCU00006-5/1
4	INSULATOR	1	TEFLON		DIN02057-N/2
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02658-5/3
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD03141-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2 Angle ±1°	DATE 2020. 06. 05.	 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
MATERIAL		APPROVED BY I.C.KIM	
FINISH		CHECKED BY	
		DRAWN BY S.Y.EUN	
SCALE 5/1	UNIT mm	SCALE A4	TITLE SMA50 CABLE PL 141F
		DWG NO. CN02845-7/5	REVISION I R
		SHEET 1 of 1	

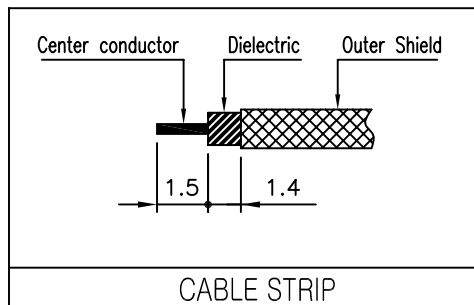

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.06.05.