



REVISION					
REV	DESCRIPTION			DRAWN	APPR
IR	Initial Registration			G.Y.KIM	I.C.KIM
					DATE
					2017.01.26.

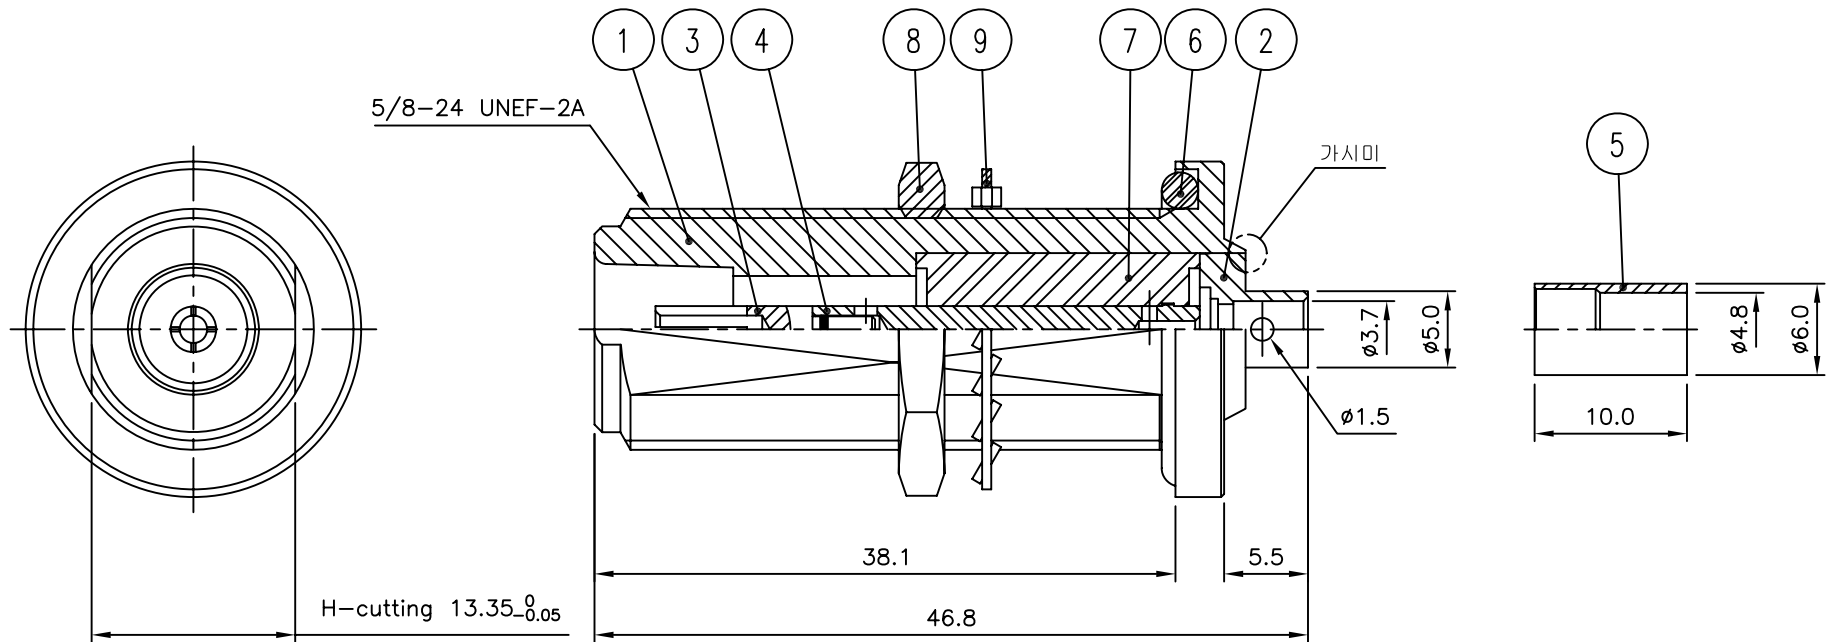


*조립방법

1. ①번 BODY (A)에 ⑦번 INSULATOR를 조립한다.
2. ③번 PIN과 ④번 PIN을 억지끼움 후 납땜한다.
3. ②번 BODY (B)를 ①번 BODY (A)에 조립한다.
4. BODY 조립체에 ⑥번 GASKET을 조립한다.
5. ⑤번 FERRULE, ⑧번 NUT, ⑨번 WASHER를 BODY 조립체와 함께 포장한다.

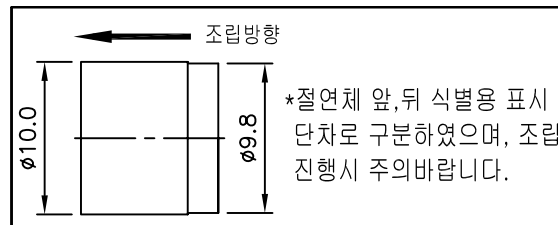

*절연체 앞, 뒤 식별용 표시
단차로 구분하였으며, 조립
진행시 주의바랍니다.

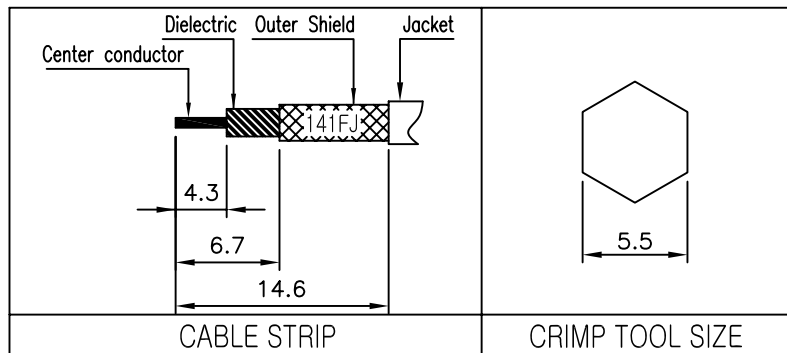

9	WASHER	1	BsS	Nickel Plate	DWA00045-5/1
8	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00033-5/1
7	INSULATOR	1	TEFLON		DIN02098-N/2
6	GASKET	1	SILICONE RUB		DGK00046-N/1
5	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00163-5/1
4	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT02706-5/3
3	CONTACT	1	BeCu C17300	Gold Plate	DCT00693-5/2
2	BODY (B)	1	MBsBD C3604BD-F	Gold Plate	DBD03225-5/1
1	BODY (A)	1	MBsBD C3604BD-F	Nickel Plate	DBD03224-5/5
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2017. 01. 26.			RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM		
MATERIAL		CHECKED BY	C.K.KIM		TITLE N50 CABLE JB (F/N) 141FJ(50Ω)
		DRAWN BY	G.Y.KIM		
FINISH		SCALE	2/1		DWG NO. CN02893-7/7 REVISION I R SHEET 1 of 1
		UNIT	mm		