
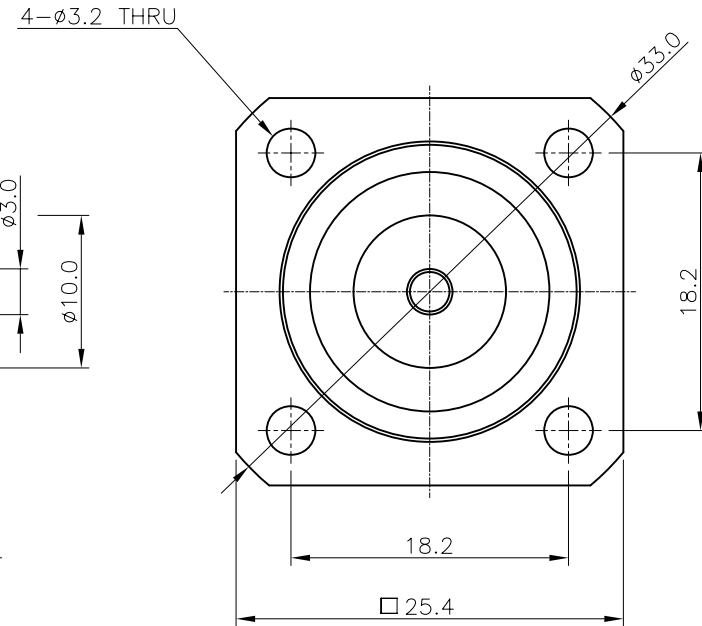


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2013.01.11.

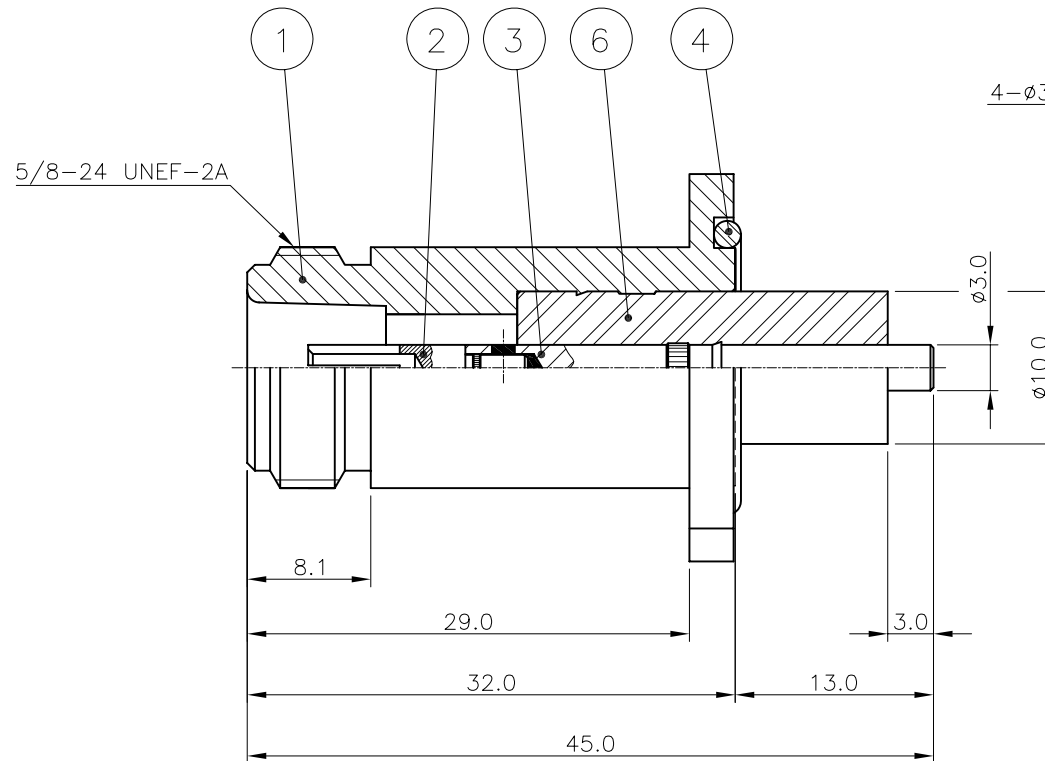

* ELECTRICAL SPECIFICATIONS
 Impedance : 50Ω
 Frequency Range : 800~2700MHz
 V.S.W.R (Max) : 1.2
 PIMD : 150dBc @ 20W 2tone (CDMA, WCDMA)

5	INSULATOR	1	TEFLON		DIN02126-N/1
4	GASKET	1	SILICONE RUB		DGK00045-N/1
3	CONTACT	1	MBsBD	Silver Plate	DCT02753-5/1
2	CONTACT	1	BeCu	Silver Plate	DCT00693-5/3
1	BODY	1	MBsBD	SUCO Plate (3μm)	DBD03255-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 01. 11.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	E.H.KIM	TITLE N50 SOLDER END JS-4H
		DRAWN BY	I.C.KIM	
FINISH		SCALE	UNIT	DWG NO. CN02923-7/1 REVISION I R SHEET 1 of 1
		2.5/1	mm	