
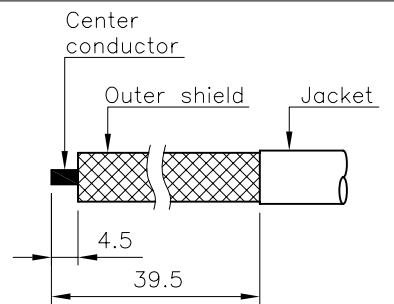


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	I.C.KIM	2013.01.23.

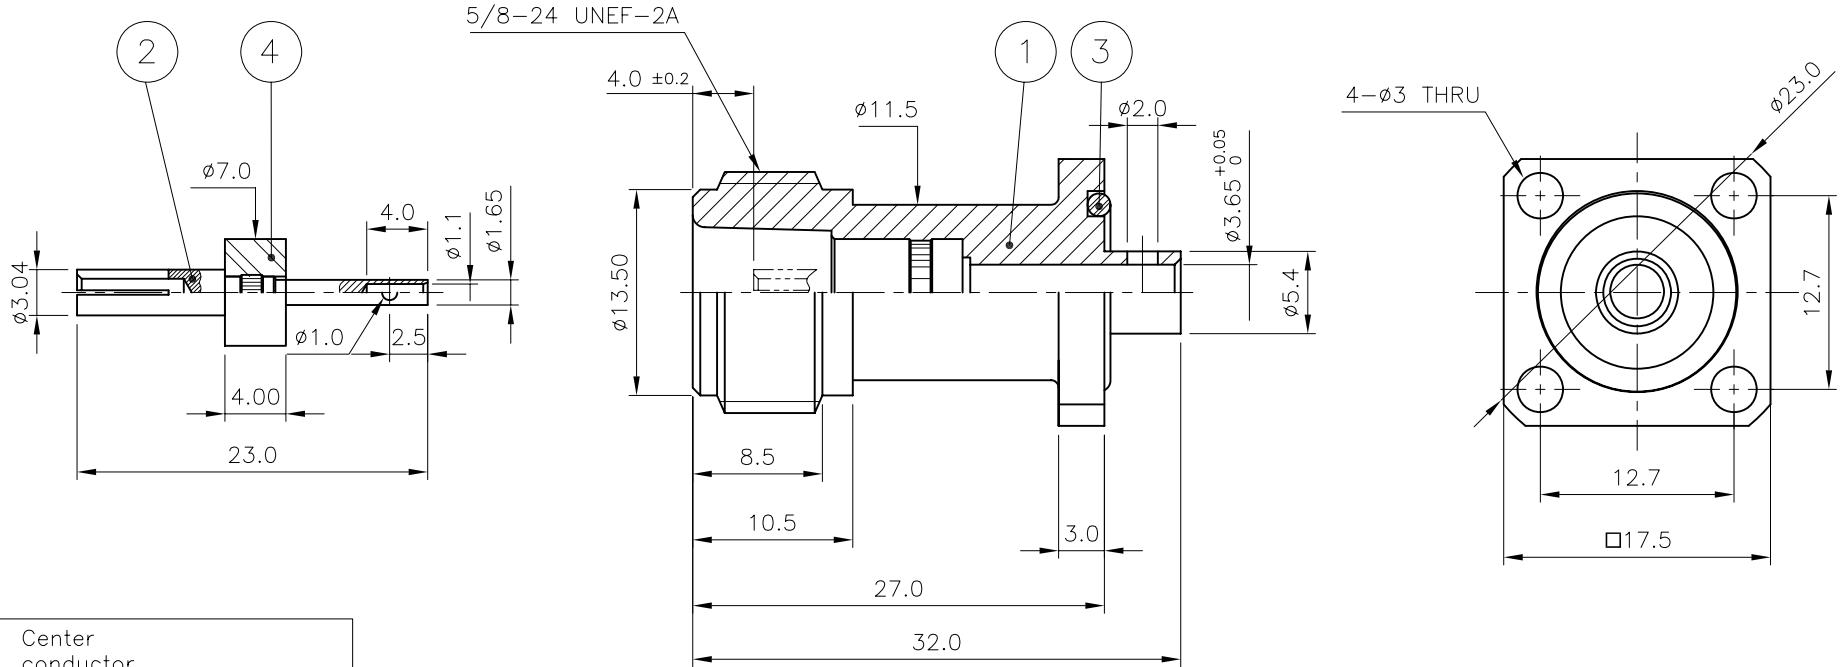

★ ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~3GHz

V.S.W.R (MAX) : ≤1.15

Insertion Loss (dB) : ≤0.2

PIM(dBc) : ≤-160


Insulation resistance (MΩ) : ≥5000

Work Voltage (V) : 1500


Conductor resistance (mΩ) : Outer conductor < 0.4

Inner conductor < 0.8

CABLE STRIPPING

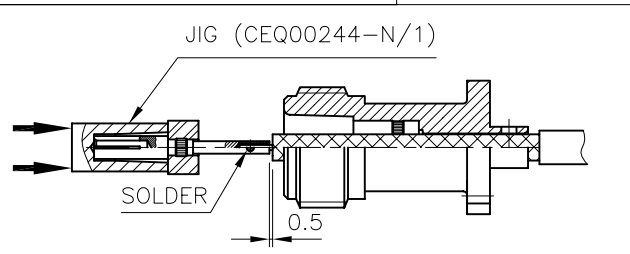

CABLE ASS'Y

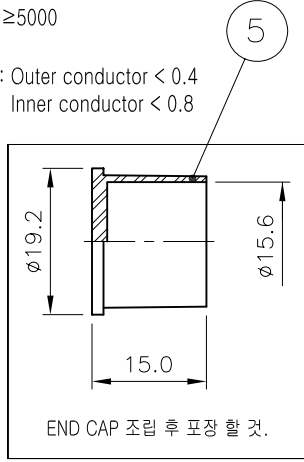

5	DUST CAP	1	ABS (PLASTIC)		DGK00114-N/1
4	INSULATOR	1	PTFE		DIN02130-N/1
3	GASKET	1	Silicon Rub		DGK00194-N/1
2	CONTACT	1	Beryllium copper	Silver Plate (5μm)	DCT02757-5/1
1	BODY	1	BRASS	SUCO Plate (3μm)	DBD03247-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 01. 23.	
	Angle	APPROVED BY I.C.KIM	
MATERIAL		CHECKED BY	
		DRAWN BY E.H.KIM	
FINISH		SCALE 2/1	UNIT mm

RF & MICROWAVE TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

KJ COMTECH CO.,LTD.

TITLE N50 CABLE JS-4H 141

DWG NO. CN02928-7/1

REVISION I R SHEET 1 of 1

A4