
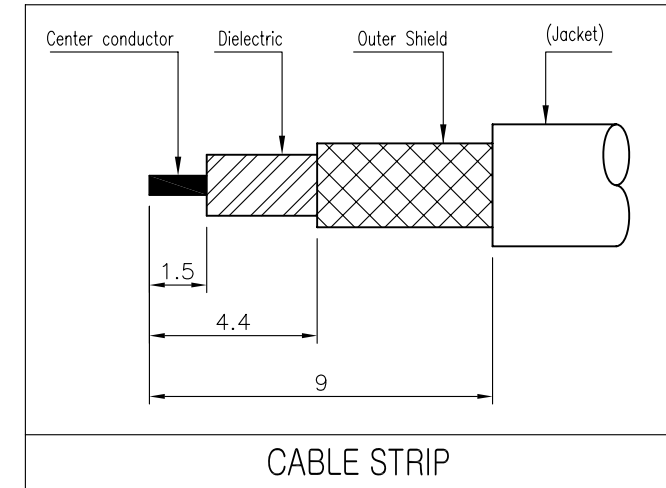


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	E.H.KIM	I.C.KIM	2013.04.02.

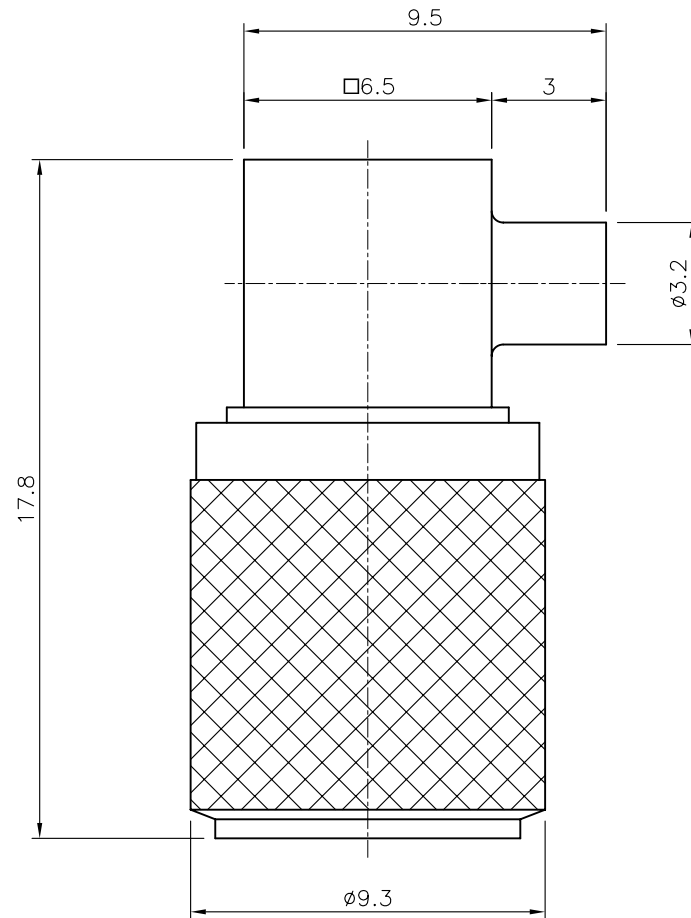

Notes

1. Impedance : 50Ω
2. Frequency Range : DC~3GHz
3. V.S.W.R : 1.2 max
4. POB JACK 삽입력 : 3 ±0.5 Kgf
이탈력 : 3 ±0.5 Kgf

6	COVER	1	MBsBD	SUCO Plate	DCO00037-5/1
5	SPRING RING	1	BeCu	Nickel Plate	DSR00007-5/1
4	CAP	1	MBsBD	SUCO Plate	DCU02205-5/1
3	INSULATOR	1	TEFLON		DIN01349-N/1
2	CONTACT	1	MBsBD	Silver Plate	DCT02808-5/1
1	1-2 BODY	1	MBsBD	SUCO Plate	DBB00338-5/1
	1-1 BODY	1	MBsBD	SUCO Plate	DBD03302-3/1 DBD03301-3/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 04. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I. C. KIM	
MATERIAL	-	CHECKED BY		TITLE POB50 CABLE PL 085
		DRAWN BY	E. H. KIM	
FINISH	-	SCALE	5/1	A4 DWG NO. CN02971-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	