
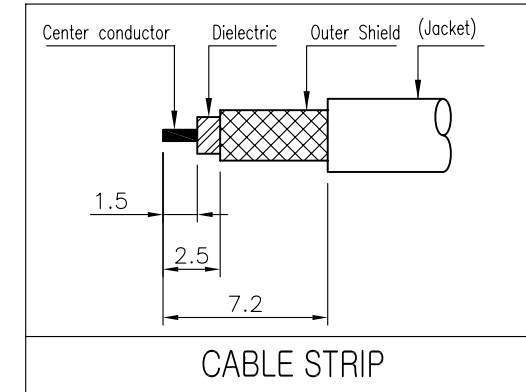
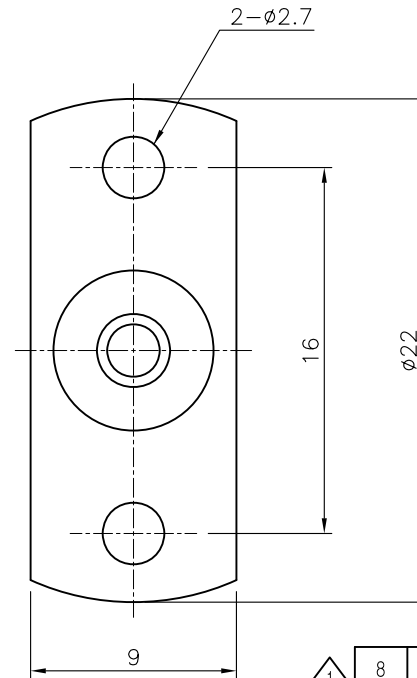


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	E.H.KIM	I.C.KIM	2013.04.03.
1	[설번No.201305-0001] 조립성 개선 (BODY 가이드 추가, 스프링 교체)	E.H.KIM	I.C.KIM	2013.05.07.

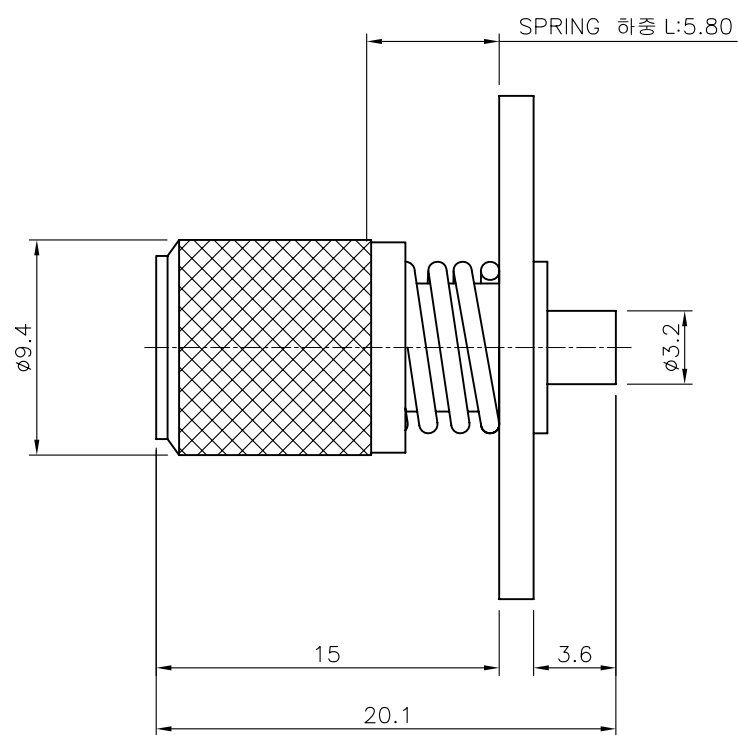

Notes

1. Impedance : 50Ω
2. Frequency Range : DC~3GHz
3. V.S.W.R : 1.2 max
4. POB JACK 삽입력 : 1.0 ±0.5 Kgf
이탈력 : 2.0~3.0kgf
5. SPRING 하중 : 장축 5.8mm - 1.95kgf (기준)
압축 1.0mm - 2.34Kgf
최대 압축 1.8mm - 2.66Kgf

1	8	SPRING RING	1	SUS304	Passivated	DSR01112-N/1 DSR01107-N/1
	7	SPRING	1	SUS304	Passivated	DSR01108-N/1
	6	PLATE	1	AL6061	Nickel Plate	DPL00004-5/1
	5	CAP	1	MBsBD	Nickel Plate	DCU02205-5/1
	4	INSULATOR	1	TEFLON		DIN02159-N/1
	3	CONTACT	1	MBsBD	Gold Plate	DCT02809-5/1
1	2	BODY	1	MBsBD	SUCO Plate	DBD03304-5/1
	1	BODY	1	MBsBD	SUCO Plate	DBD03303-5/1
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 04. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I. C. KIM	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE POB50 CABLE PS-2H 085
		DRAWN BY	E. H. KIM	
FINISH	-	SCALE	3/1	A4 DWG NO. CN02972-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	