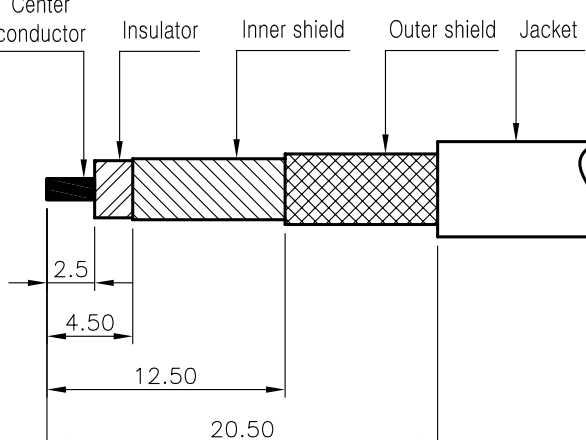



Technical drawing of a spring ring assembly. The drawing includes a front view on the left showing a circular top with a diameter of 13.9. A central cross-section on the right shows the internal components, including a spring ring (8) and a spring (1). Dimensions include a total width of 24.55, a height of 28.5, and a spring diameter of 3.3. A side view on the far right shows a rectangular component with a width of 13.00 and a height of 5.60. A table at the bottom right lists the parts: 8 (SPRING RING), 1 (PBR), and 3 (Nickel Plate).

8	SPRING RING	1	PBR	Nickel Plate	DSR00020-5
---	-------------	---	-----	--------------	------------

 Center conductor Insulator Inner shield Outer shield Jacket 2.5 4.50 12.50 20.50	 5.5
CABLE STRIP	CRIMP TOOL

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	±0.1	APPROVED BY		I.C.KIM			
	Angle	CHECKED BY			TITLE		
±1°							
MATERIAL	_____	DRAWN BY		M.H.SONG	N50 CABLE PL LMR200		
FINISH	_____	SCALE	UNIT				
		2.5/1	mm			A4	
					REVISION	I R	SHEET 1 of 1