


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.07.06.

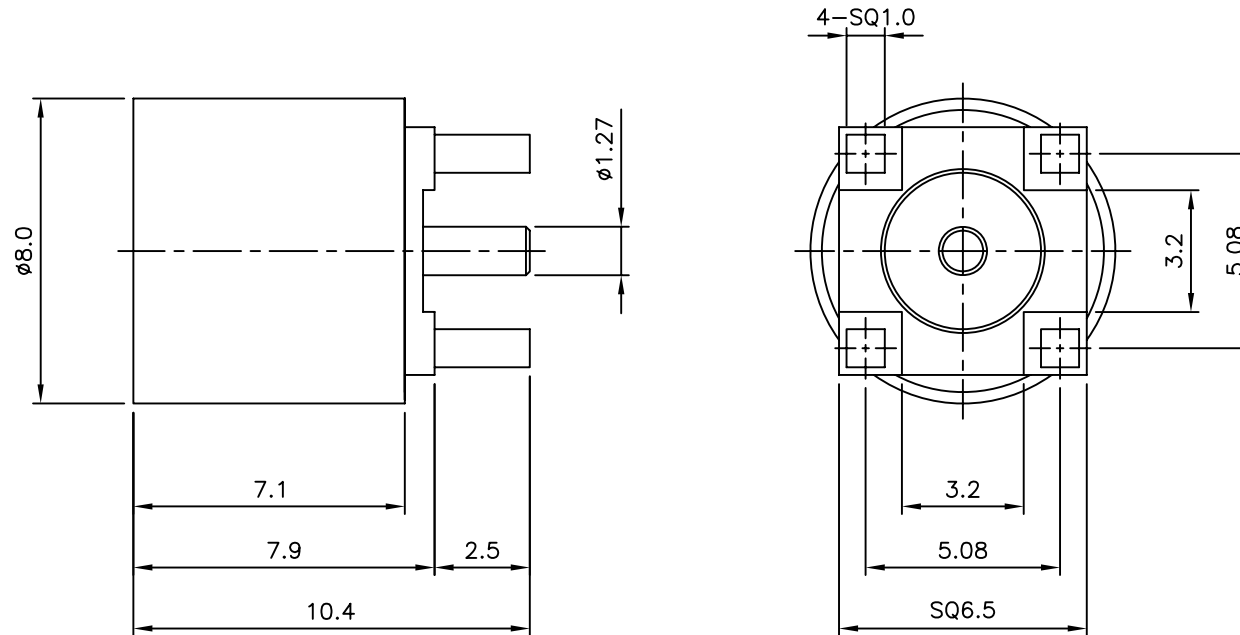

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 3.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 2.5\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

5	SPRING RING	1	BeCu C17300	Nickel Plate	DSR00007-5/1
4	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02222-5/1
3	INSULATOR	1	TEFLON		DIN02457-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03230-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03729-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 07. 06.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE PDM50 PCB PS-4R
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03297-7/2 REVISION I R SHEET 1 of 1
		UNIT	mm	