
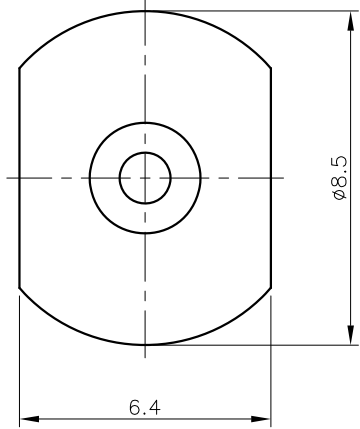


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.10.17.

1/4-36 UNS-2A

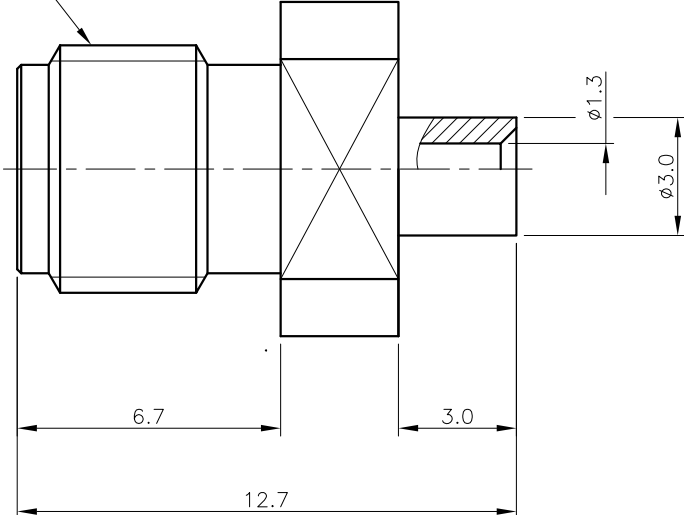


ELECTRICAL DATA : (47 Flexible Cable Assy)

- 1. IMPEDANCE : 50Ω
- 2. FREQUENCY RANGE : DC~8.5GHz
- 3. VSWR (Max) : 1.2
- 4. DIELECTRIC WITHSTANDING VOLTAGE : 250 V RMS Max.
- 5. INSULATION RESISTANCE : ≥5000MΩ

MECHANICAL DATA :

- 1. DURABILITY : 500 CYCLES MIN.
- 2. TEMPERATURE RANGE : -40° C ~ 125°C

■탈피기 : M-005-011로 작업

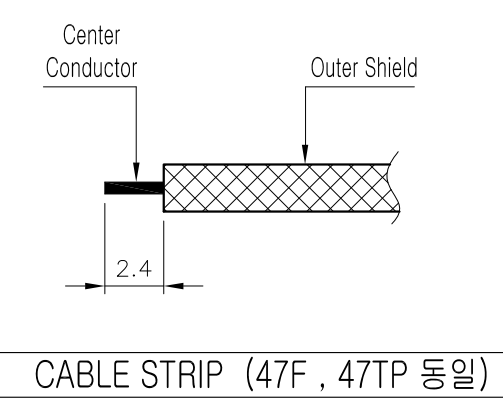

CABLE STRIP (47F , 47TP 동일)

3	INSULATOR	1	TEFLON		DIN02436-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03305-5/3
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD03784-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 10. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY					
MATERIAL -		CHECKED BY			TITLE SMA50 CABLE JS 47		
		DRAWN BY S.H.KIM					
FINISH -		SCALE 5/1	UNIT mm		A4	DWG NO. CN03344-7/2	
						REVISION	I R