

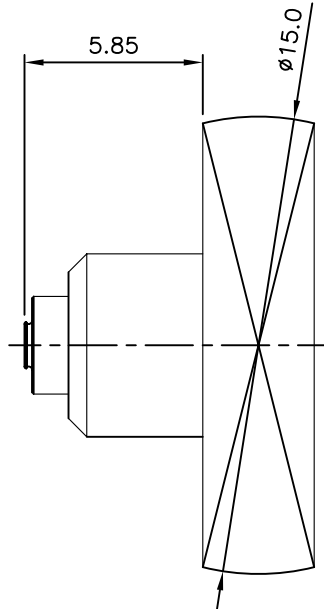
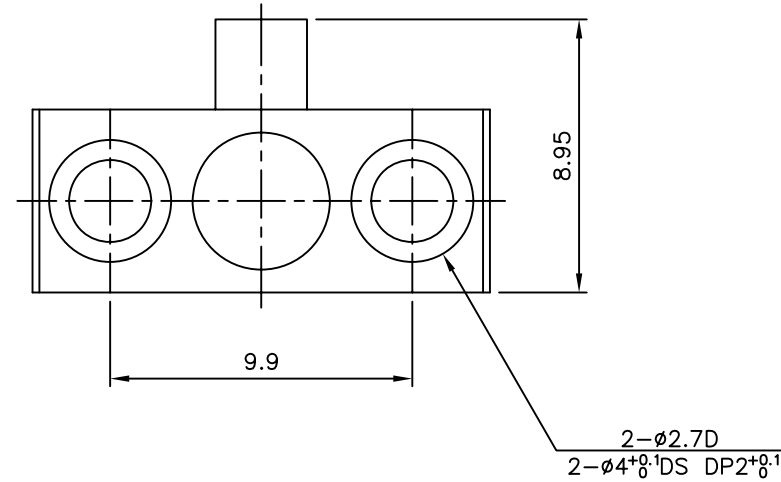


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM		2015.05.27.

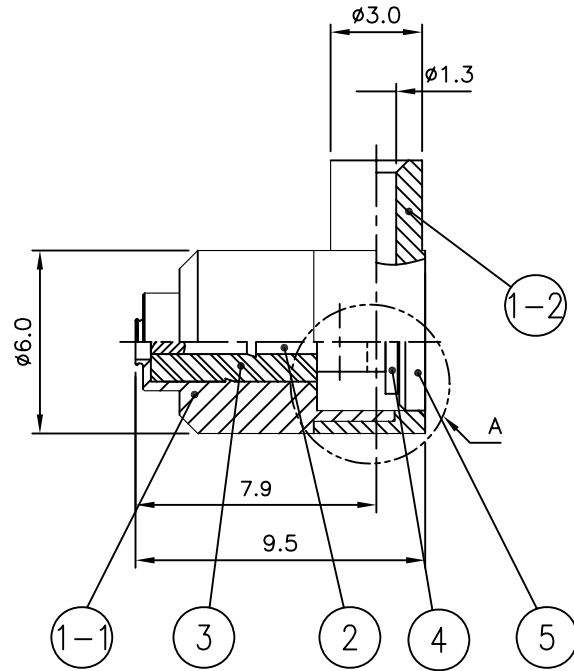

* 삼이탈력 확인 (KMS-180) - 상대물 체결
 -삽입력 : 0.6~1.0Kgf
 -이탈력 : 0.5~0.9Kgf



※ 핀높이 별도 표시 A 참조 ※

5	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCO00020-5/2
4	INSULATOR	1	TEFLON		DIN00921-N/1
3	INSULATOR	1	TEFLON		DIN02600-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03492-5/1
1	1-2 BODY	1	MBsBD C3604BD-F	Nickel Plate	DBB00416-5/1
	1-1 BODY	1			DBD03947-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	±0.2
	Angle	±1°
MATERIAL		
FINISH		

DATE	2015. 05. 27.
APPROVED BY	
CHECKED BY	
DRAWN BY	I.C.KIM
SCALE	4/1
UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
		TITLE KMS-180 CABLE JL-2H MCB #59-φ1.13	
DWG NO.	CN03429-7/1		
REVISION	1R	SHEET	1 of 1

A4