
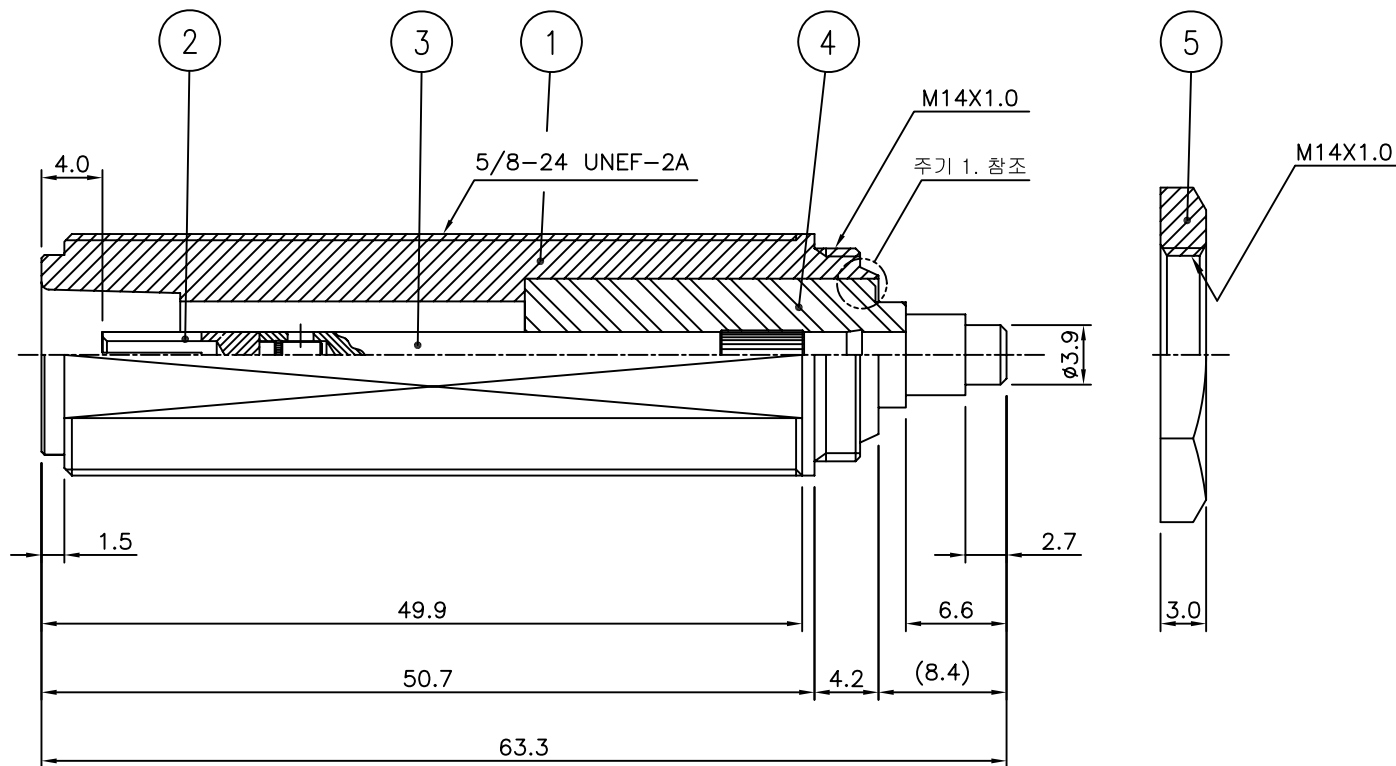


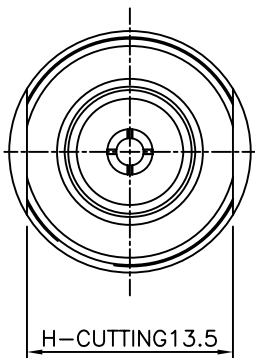

ELECTRICAL SPEC

1. Frequency Range : DC ~ 6GHZ
2. PIMD(CDMA,WCDMA) : -155db (20wx2tone)
3. VSWR(Max) : 1.2

주 기

1. 지정된 가시미 지그로 가시미 작업을 한다.
가시마 후 지정된 지그로 4군데 펀칭 할 것

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015.12.17.

5	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00102-5/1
4	INSULATOR	1	TEFLON		DIN02706-N/1
3	CONTACT(B)	1	MBsBD C3604BD-F	Silver Plate (3μm)	DCT03615-5/1
2	CONTACT(A)	1	BeCu C17300	Silver Plate (3μm)	DCT00690-5/2
1	BODY	1	MBsBD C3604BD-F	SUCO Plate (3μm)	DBD04096-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2015. 12. 17.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY	S.M.LEE	KJ COMTECH CO.,LTD. TITLE N50 SOLDER END JB (F/N)
		DRAWN BY	H.J.LEE	
FINISH	-	SCALE	2/1	DWG NO. CN03538-7/1
		UNIT	mm	REVISION IR SHEET 1 of 1