
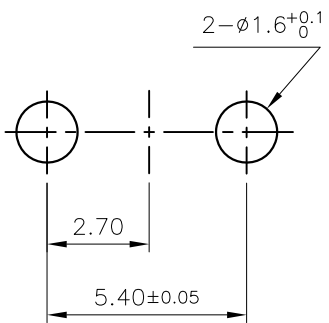
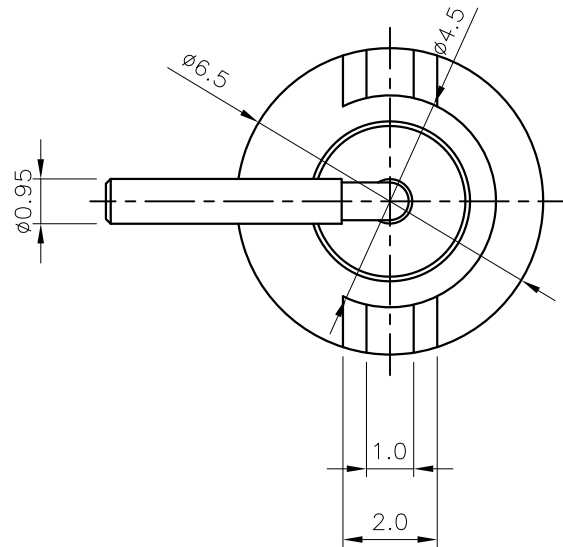


* 상대물 CN03592-7/1 과 삼.이탈력 체크 할 것.
 삽입력 : 2~4Kgf
 이탈력 : 5~8Kgf

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.04.27.

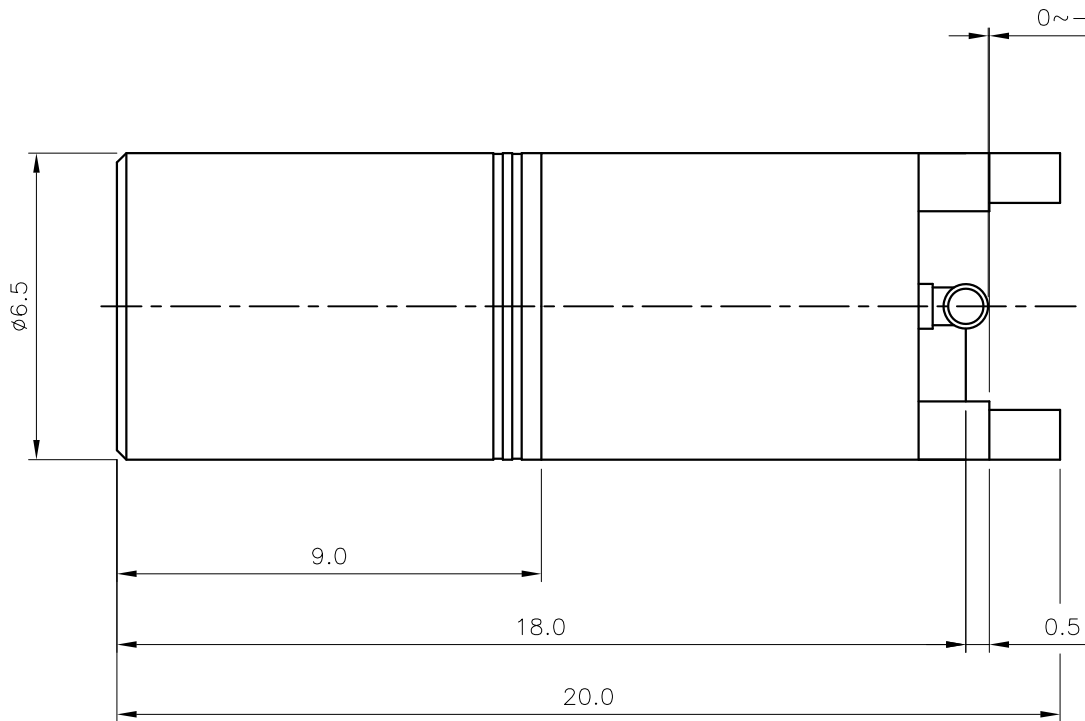

PCB MOUNTING HOLE

5	SPRING RING	1	BeCu C17300	Copper Plate	DSR00009-5/1
4	CAP	1	MBsBD C3604BD-F	Gold Plate (하지 Nickel 5μm이상)	DCU02278-5/1
3	INSULATOR	1	TEFLON		DIN02746-N/1
2	CONTACT	1	BeCu C17300	Gold 0.4μm Plate	DCT03679-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate (하지 Nickel 5μm이상)	DBD04149-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2016. 04. 27.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY I.C.KIM					
MATERIAL _____		CHECKED BY 	TITLE SMB50 PCB PS-2R				
		DRAWN BY H.J.LEE					
FINISH _____		SCALE 6/1	UNIT mm		A4	DWG NO. CN03594-7/1	
						REVISION I R	SHEET 1 of 1