



★ 상대물 CN03592-7/1 과 삽.이탈력 체크 할 것.

삽입력 : 2~4Kgf

이탈력 : 5~8Kgf

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.04.27.
i	상대물 체결 후 흔들림 발생 개선	S.H.KIM		2023.06.27.

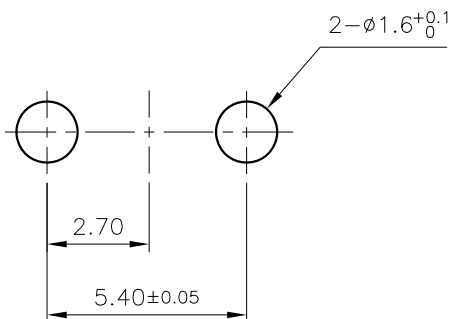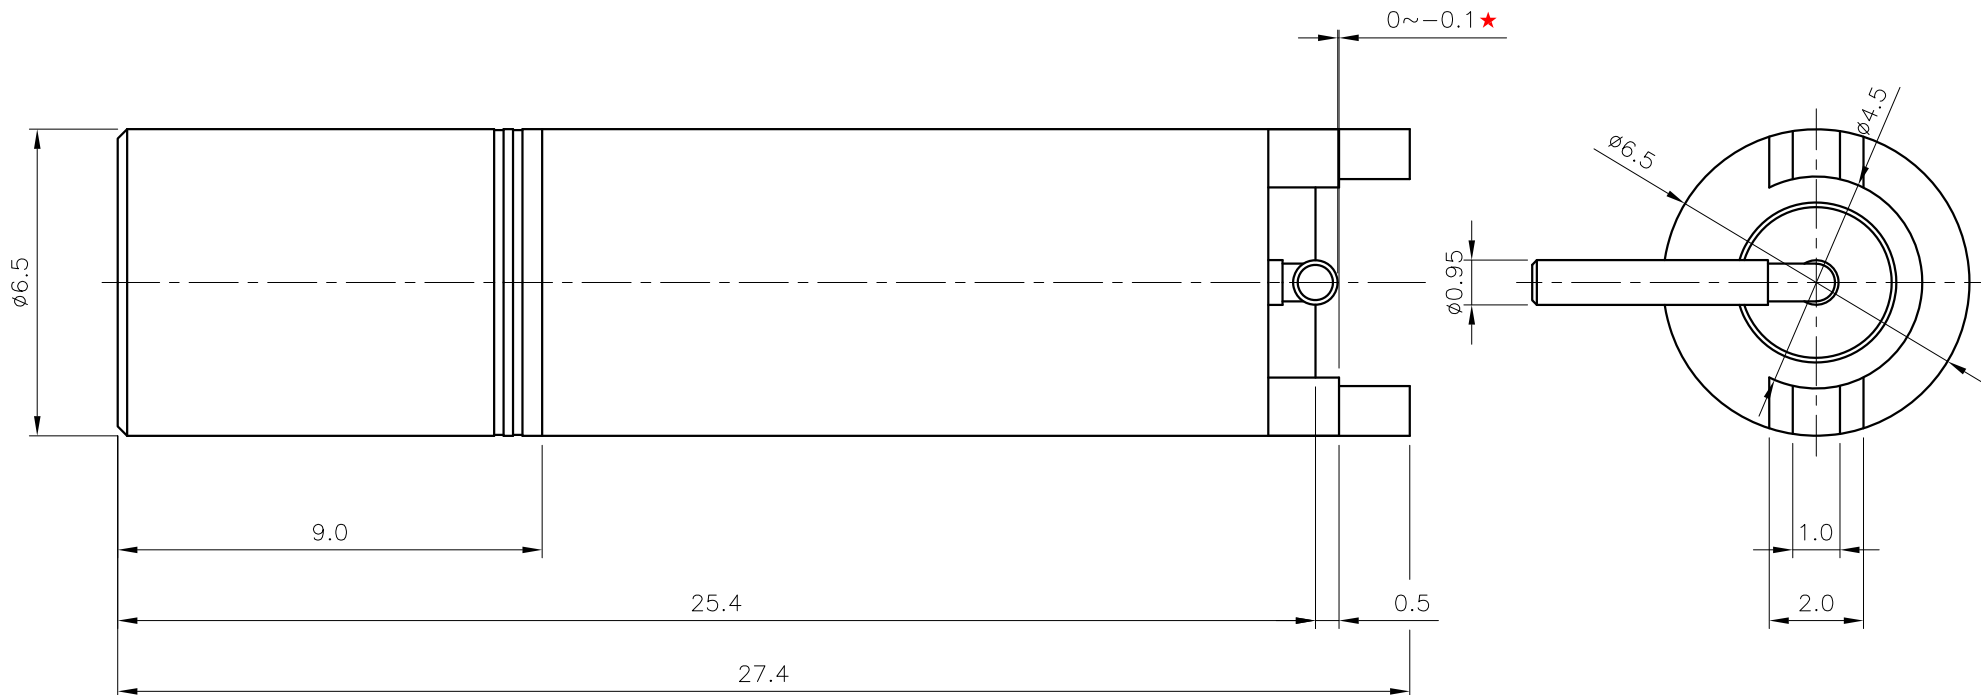

PCB MOUNTING HOLE

5	SPRING RING	1	BeCu C17200	Copper Plate	DSR00009-5/1
4	CAP	1	MBsBD C3604BD-F	Gold Plate (최소 Nickel 5μm 이상)	DCU02278-5/1
3	INSULATOR	1	TEFLON		DIN02748-N/1
2	CONTACT	1	BeCu C17300	Gold 0.4μm Plate	DCT03681-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate (최소 Nickel 5μm 이상)	DBD04152-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2023. 06. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY		
MATERIAL _____	CHECKED BY		TITLE SMB50 PCB PS-4R 파노라마	
	DRAWN BY S.H.KIM			
FINISH _____	SCALE 6/1	UNIT mm		A4
	DWG NO. CN03595-7/1			
		REVISION 1	SHEET 1 of 1	