

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω

Frequency Range : DC~3GHz


V.S.W.R (MAX) : 1.2

Operating Temperature Rating


-40°C to +85°C

Storage Temperature Range

-55°C to +155°C

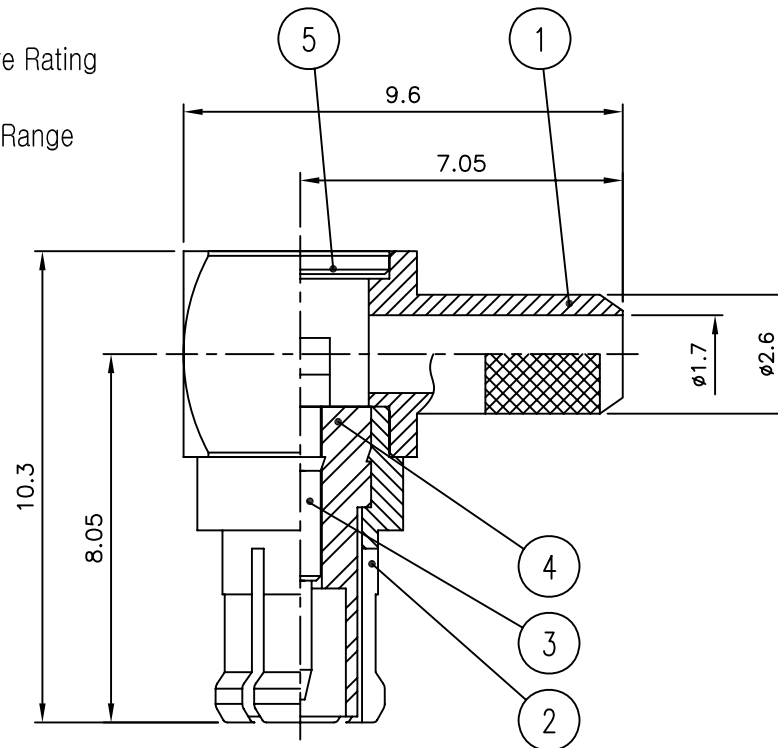


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2016.06.13.
1	[설번No.201607-0001]PIPE 도금 변경 Gold -> Nickel	H.J.LEE	I.C.KIM	2016.07.04.

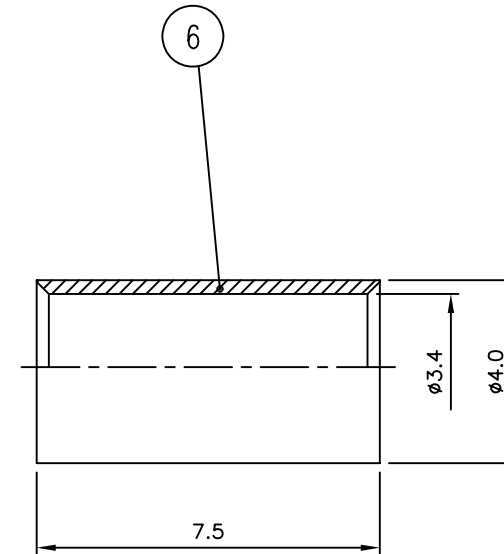

* 조립방법

1. JACK BODY에 TEFLON을 조립한다.
2. JACK BODY에 BODY를 억지끼움 한다.
3. TEFLON에 PIN을 조립한다.

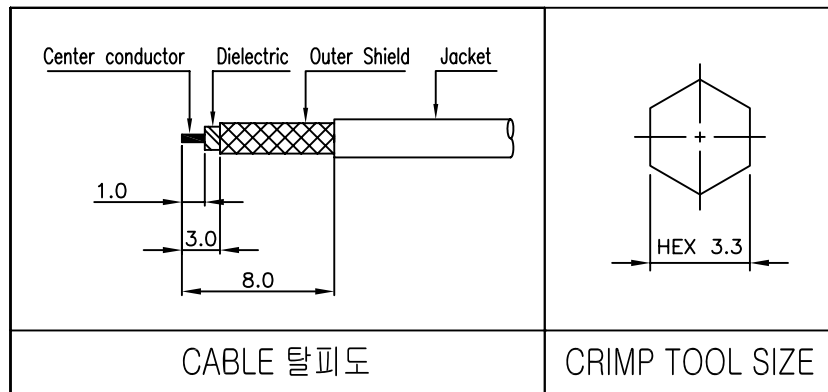

6	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00040-5/3 DFE00040-5/1
5	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00110-5/1
4	INSULATOR	1	TEFLON		DIN02781-N/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03707-5/1
2	JACK BODY	1	BeCu C17300	Gold Plate	DJA00230-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04175-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2016. 07. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE MCX50 CABLE PL 1.5DS-QEHB
		DRAWN BY	H.J.LEE	
FINISH		SCALE	6/1	DWG NO. CN03612-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	