
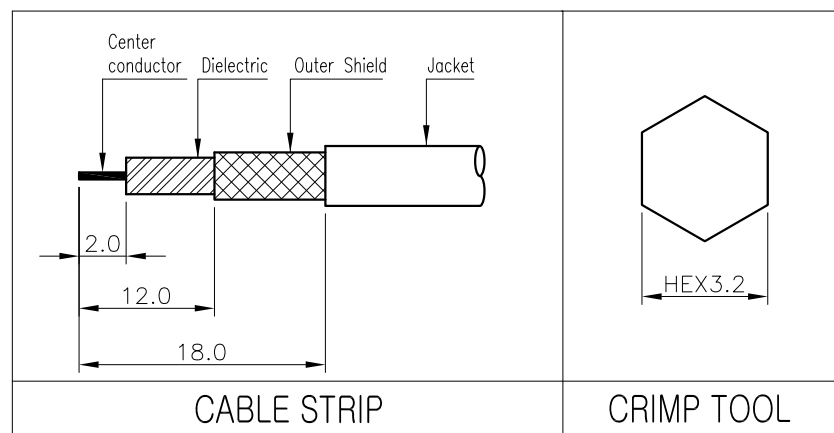


* ELECTRICAL DATA :

1. IMPEDANCE : 75Ω
2. FREQUENCY RANGE : DC~1GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 1.5kV rms
4. WORKING VOLTAGE : 500 VOLTS MAX
5. INSULATION RESISTANCE : ≥5000MΩ
6. CONTACT RESISTANCE :
-CENTER CONTACT : ≤1.5mΩ
-OUTER CONTACT : ≤1.0mΩ

* ENVIRONMENTAL SPECIFICATIONS

1. TEMPERATURE OPERATING RANGE : -40°C ~ +125°C

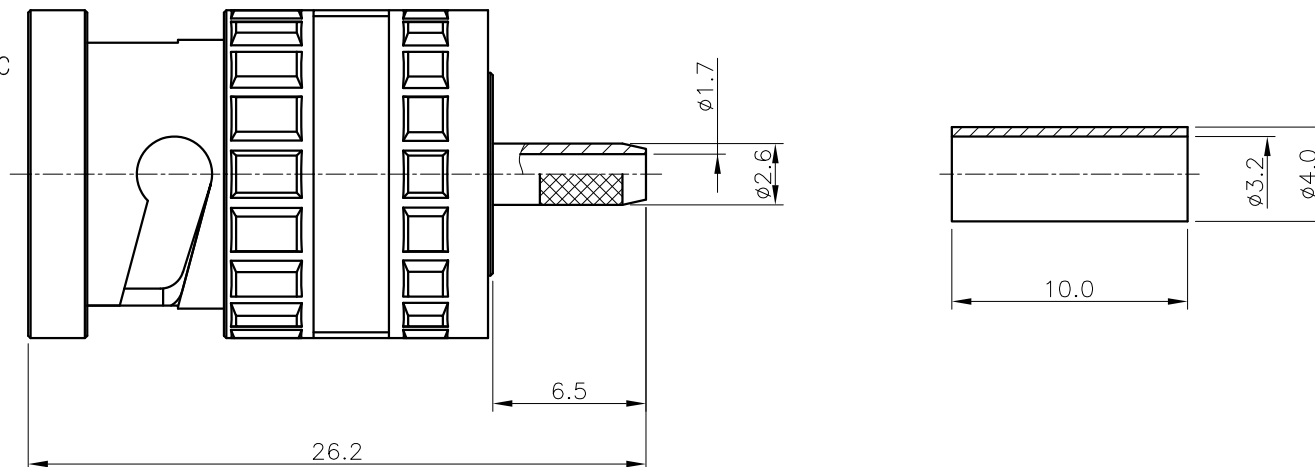

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 07.
i	KJ 금형캡 각인 삭제 적용	S.Y.EUN	I.C.KIM	2020. 06. 25.

1	8	CAP	1	ZnDc	Nickel Plate	DCU02281-5/3 DCU02281-5/1
	7	WASHER	1	BsS	Nickel Plate	DWA00136-5/1
	6	WASHER	2	BeCu C17300	Nickel Plate	DWA00069-5/1
	5	FERRULE	1	MBsBD C3604BD-F	Nickel Plate	DFE00034-5/1
	4	INSULATOR	1	TEFLON		DIN00603-N/1
	3	GAKSET	1	SILICONE		DGK00012-N/1
	2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00553-5/1
	1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04457-5/1
NO.		DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2020. 06. 25.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY	I.C.KIM				
MATERIAL _____		CHECKED BY					
		DRAWN BY	S.Y.EUN				
FINISH _____		SCALE 3/1	UNIT mm		A4	DWG NO. CN03639-7/8	
TITLE BNC75 CABLE PS RG179(75Ω)							
						REVISION 1	SHEET 1 of 1