


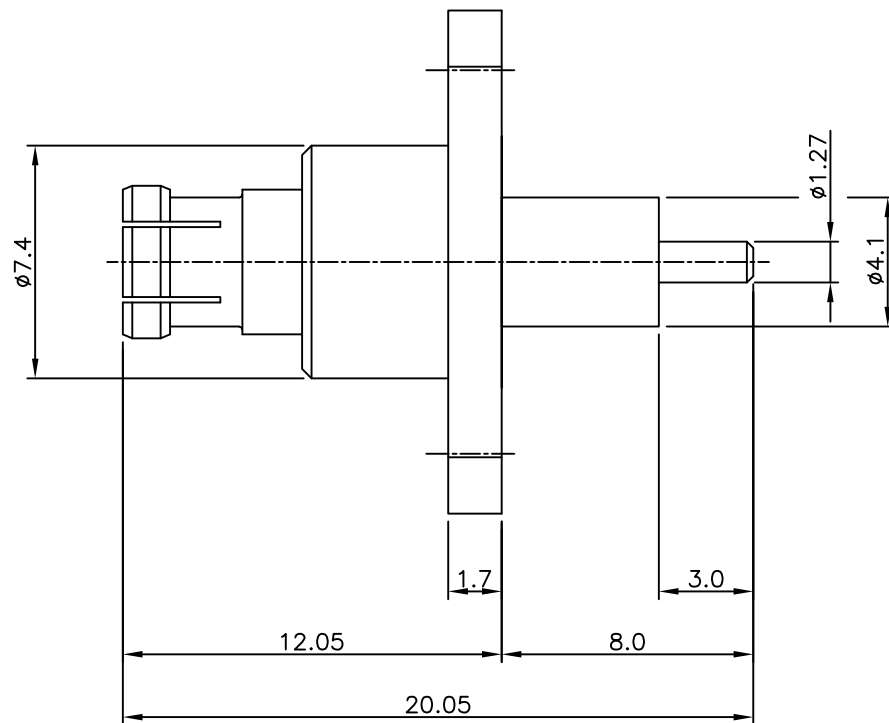


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019.05.10.
1	[설변No.201911-0024] 조립성 및 특성 개선으로 인한 스프링변경	S.Y.EUN	I.C.KIM	2019.11.25.
2	[설변No.202105-0009] 조립성 개선으로 인한 절연체 변경	S.Y.EUN	I.C.KIM	2021.05.21.
3	[설변No.202211-0012] 조립후 틸트 개선으로 인한 스프링 재변경	S.Y.EUN	S.H.KIM	2022.11.29.

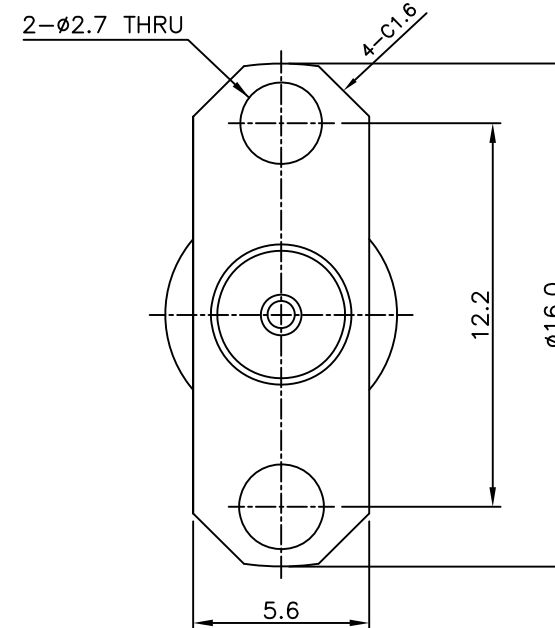

3	1	8	SPRING	1	SUS	Passivated	DSR01168-5/5
		7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02302-5/1
		6	INSULATOR	1	TEFLON		DIN03004-N/5
2		5	INSULATOR	1	TEFLON		DIN03020-N/2
		4	CONTACT (B)	1	BeCu C17300	Gold Plate	DCT03806-5/3
		3	CONTACT (A)	1	MBsBD C3604BD-F	Gold Plate	DCT03960-5/1
		2	JACK BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04416-5/7
		1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04417-5/4
		NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	±0.3	2022. 11. 29.				
	Angle	APPROVED BY	S.H.KIM			
	±1°	CHECKED BY				
MATERIAL		DRAWN BY	S.Y.EUN			
					TITLE	
					BMBC50 SOLDER END PS-2H	
FINISH		SCALE	UNIT		A4	DWG NO.
		4/1	mm			CN03676-7/7
					REVISION	SHEET
					3	1 of 1