
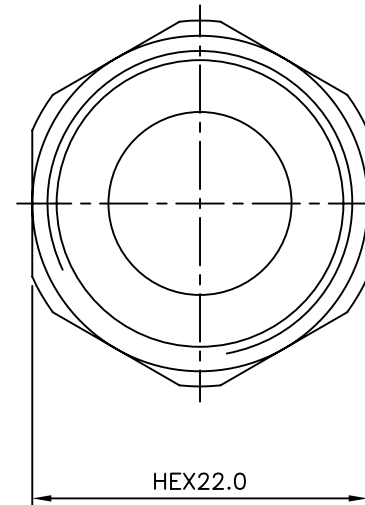



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2017.05.24.

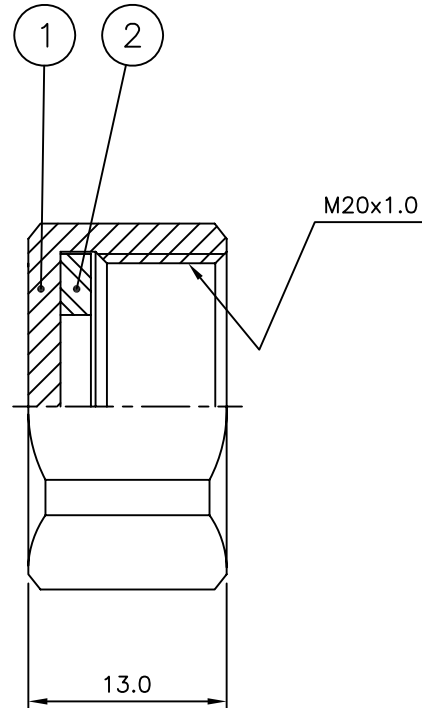




*포장사양 2Page 참조 할 것.

2	GASKET	1	SILICONE RUB		DGK00316-N/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DCU02291-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE


TOLERANCE	Decimal	DATE 2017. 05. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 4.3/10 DIN50 PROTECTIVE Dust Cap PS
		DRAWN BY	I.C.KIM	
FINISH		SCALE	2/1	DWG NO. CN03695-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	



A4

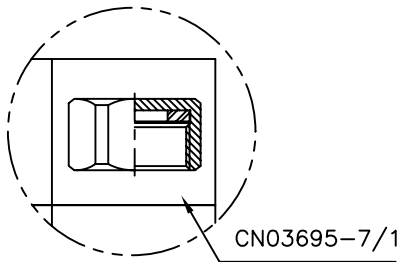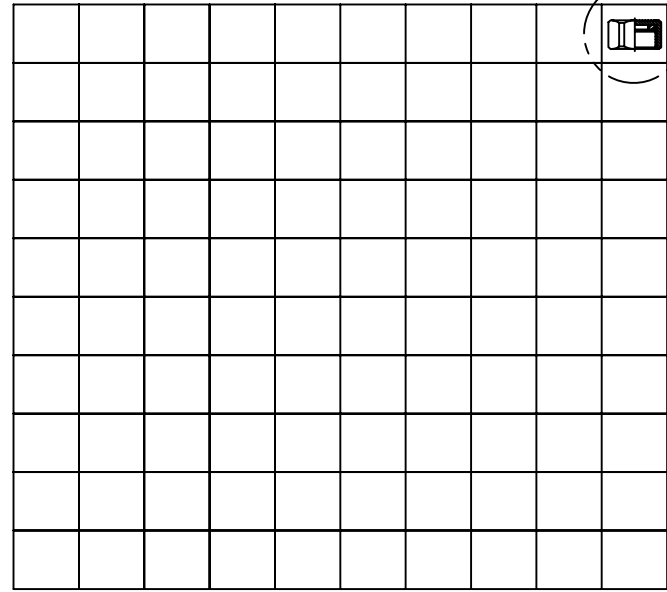

A부 확대도

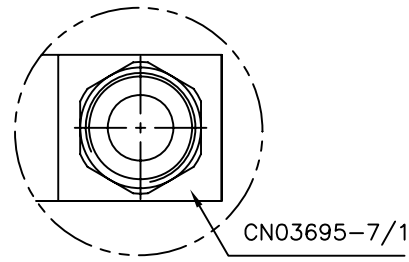

B부 확대도


포장 방법

1. Tray 홈 당 제품 1EA 씩 넣는다.
2. 바닥에 간지를 깔고 6Tray를 포개어 포장한다.
3. 제품 Tray를 공Tray로 덮은 후 간지를 제일 위에 올린다.
4. 지정된 BOX에 포장한다.
5. 제품을 넣고 남은 자리를 AIR CAP으로 채운다.

* 1Tray - 제품 100EA * 6Tray = 제품600EA

* 1Box - 6Tray+1공Tray *무게 제품 1EA - 약 17.7g

1Box - 약 11.74Kg

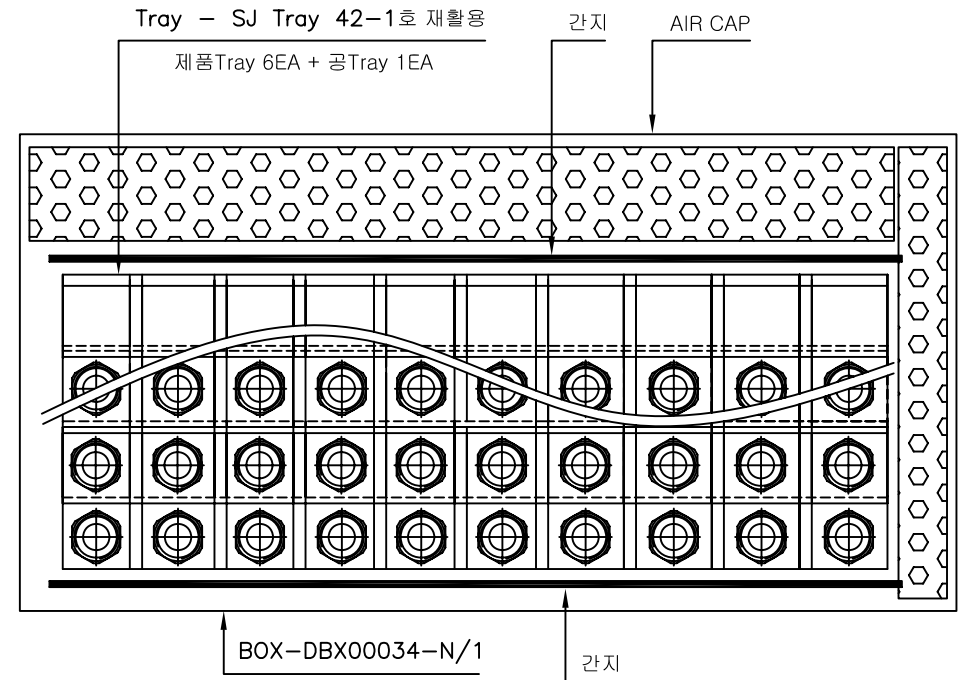

* 포장자재

- Tray : CPA00095-N/1 가로25cm, 세로31.5cm 무게:28g (100구)
- 지퍼백 : DVB00007-N/1 가로28cm, 세로40cm 무게:24g
- 간지 : DBX00095-N/1 가로 24cm, 세로 34cm 무게:41g
- 박스 : DBX00034-N/1 가로 28cm, 세로 37cm 무게 : 566g