


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
IR	Initial Registration			S.Y.EUN	I.C.KIM	2018.11.02.

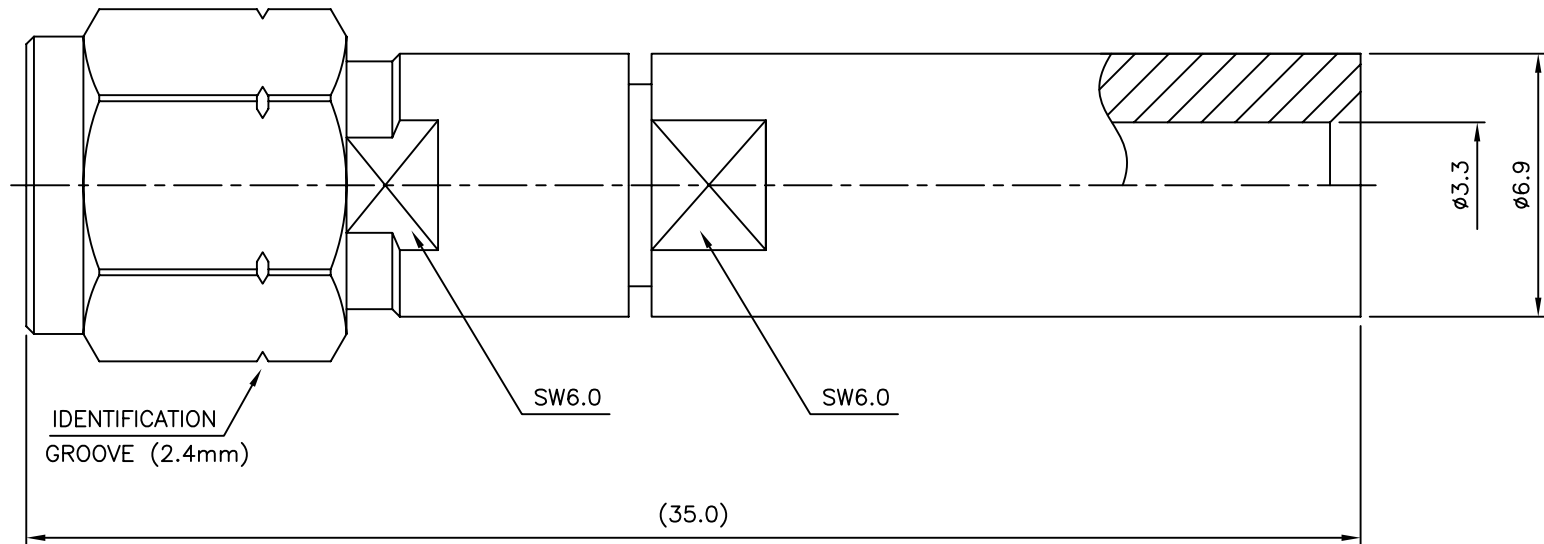


ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~50GHz
3. VSWR (Max) : 1.25

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

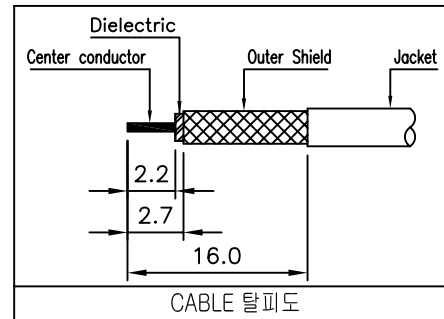

9	CLAMP	1	MBsBD C3604BD-F	Nickel Plate	DBN00213-5/4
8	CAP	1	SUS	Passivated	DCU02297-5/2
7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	INSERT	1	MBsBD C3604BD-F	Gold Plate	DIS00286-5/2
5	INSERT	1	SUS	Passivated	DIS00285-5/4
4	INSULATOR	1	PEEK		DIN02989-N/8
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT03950-5/A
1	BODY	1	SUS	Passivated	DBD04404-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 11. 02.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.4mm CABLE PS MUAF05SD
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03783-7/3 REVISION I R SHEET 1 of 1
		UNIT	mm	