


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.11.20.

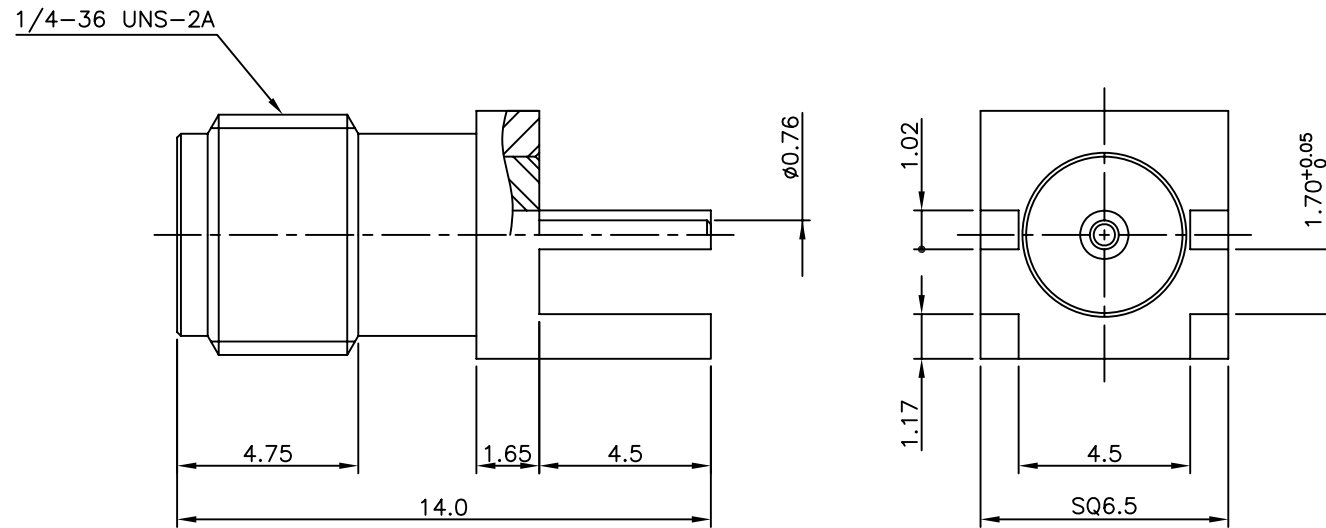

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -65°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2
4. INSULATION RESISTANCE : 5000M Ω (min)
5. INTERFACE : MIL-C-39012

MECHANICAL DATA :

1. RECOMMENDED COUPLING NUT TORQUE : 0.8Nm~1.1Nm
2. Durability : 500 Mating

3	INSULATOR	1	TEFLON		DIN00091-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT01662-5/3
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04442-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 11. 20.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 PCB JS-4R (edge)
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03805-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	