


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.02.18.


7/16-28 UNEF-2A

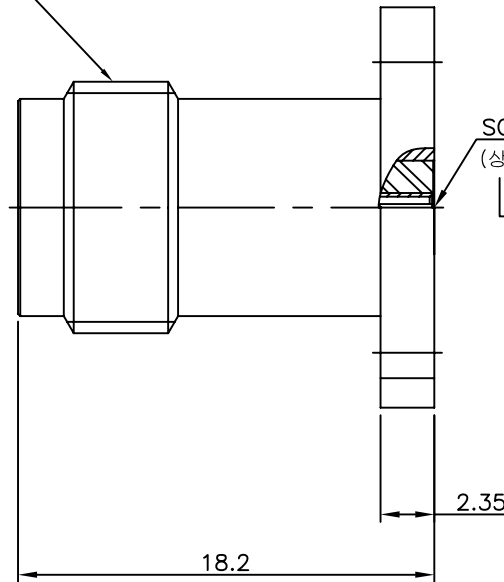

SOCKET TO ACCEPT
(상대물 실측 치수 $\phi 0.94$)

Tight하게 삽/이탈 되도록 관리할 것

4- $\phi 3.0$ THRU

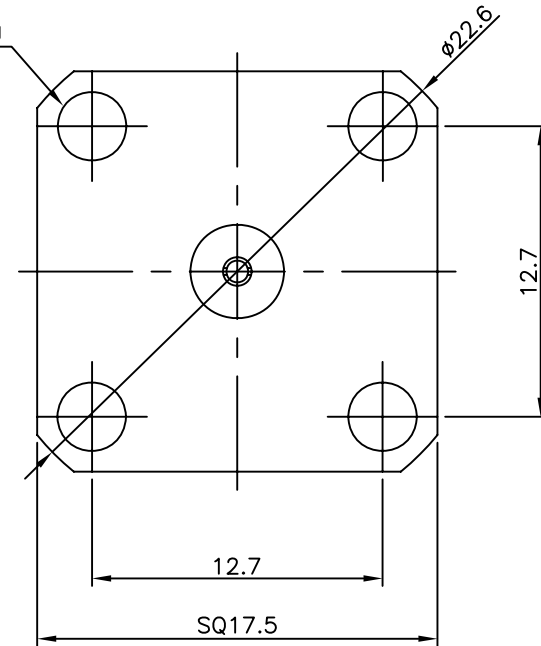

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSULATION RESISTANCE : 5000M Ω (Min)

3	INSULATOR	1	TEFLON		DAI02485-N/1
2	CONTACT	1	BeCu C17300	Gold Plate (1.27 μm)	DAC03323-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD04466-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 18.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE TNC50 SOLDER END JS-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. CN03824-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	