



* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VRMS (Min)

* MECHANICAL DATA

1. DURABILITY : 500 CYCLES MIN
2. TEMPERATURE RANGE : -65°C to +165°C

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 02. 21.

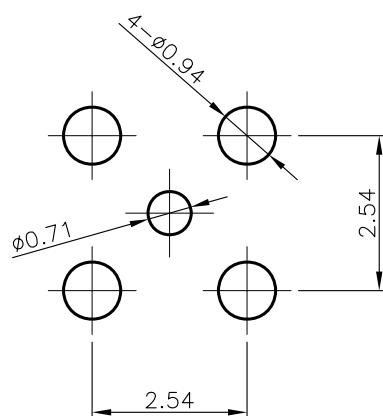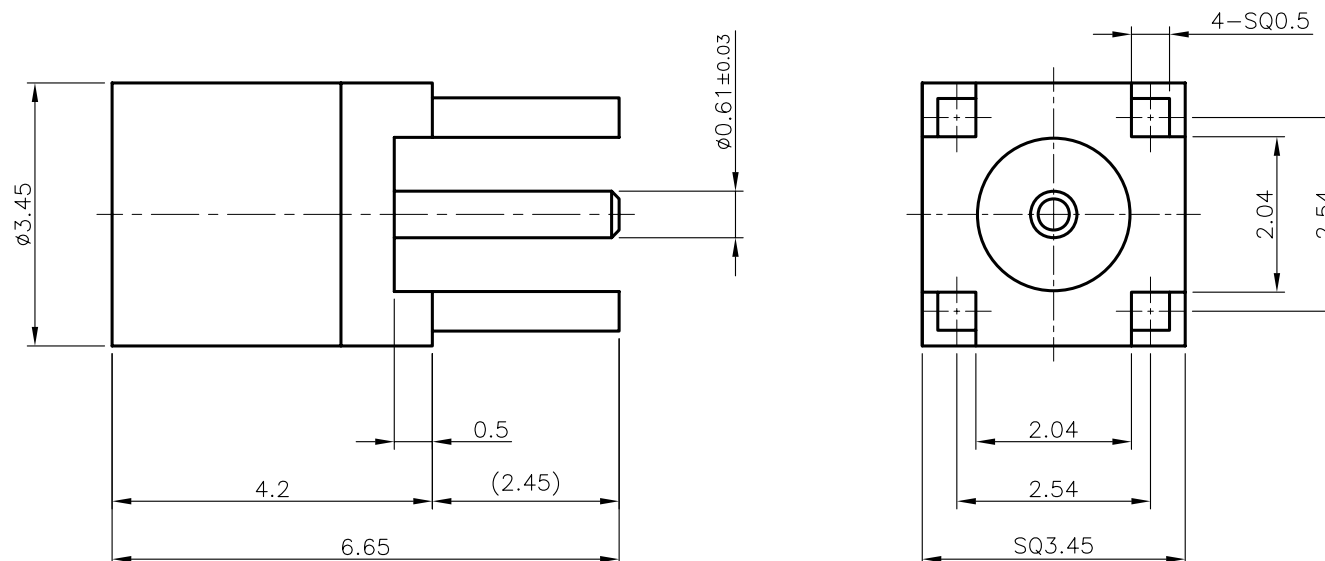

PCB MOUNTING HOLE

3	INSULATOR	1	TEFLON		DIN03026-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03986-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04468-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMPM50 PCB PS-4R [FULL DETENT]
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. CN03826-7/1 REVISION I R SHEET 1 of 1
		10/1	mm	