
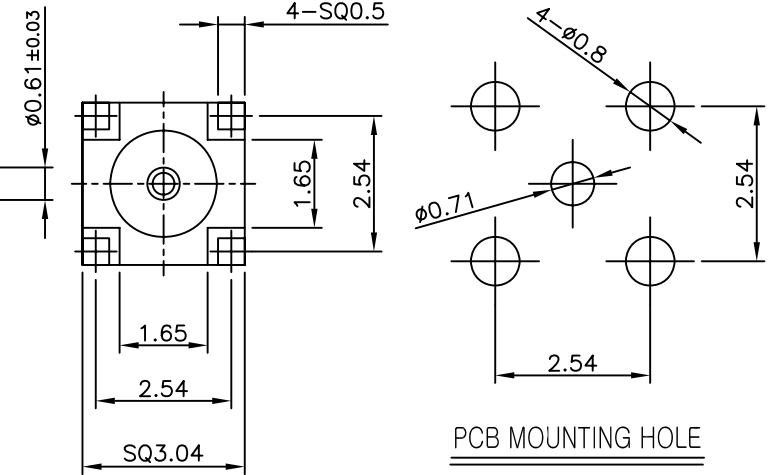


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019. 12. 30.
↑	[설번No.202202-0004] 가공성 개선으로 인한 PCB 사각 형상 변경	S.Y.EUN	S.H.KIM	2022. 02. 07.


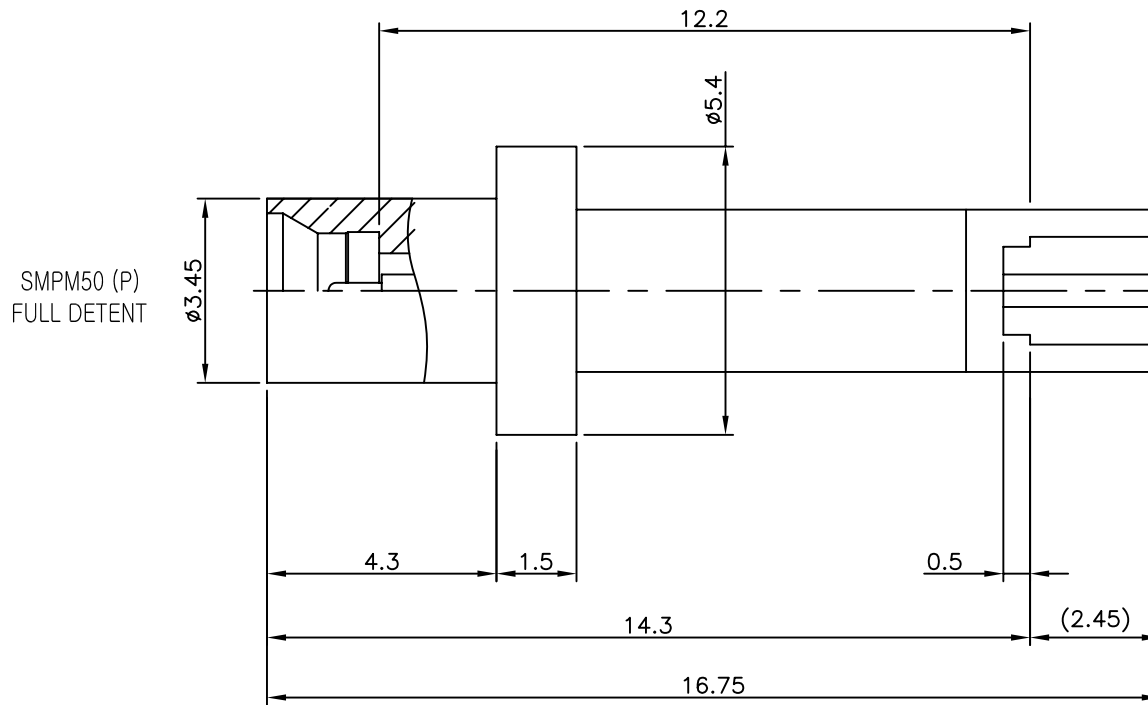


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VRMS (Min)

* MECHANICAL DATA

1. DURABILITY : 500 CYCLES MIN
2. TEMPERATURE RANGE : -65°C to +165°C

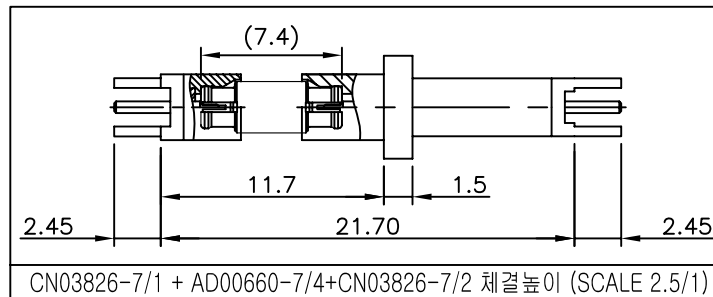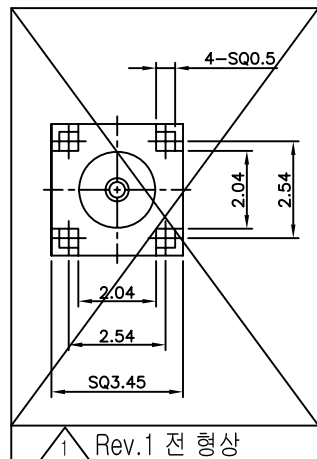

- ▶ SMPM50 Female 상대물 메이팅 검사 진행할 것
- ▶ 상대물 : AD00660-7/*
- 삽입력 : 3.6kgf (Max)
 - 이탈력 : 3.6kgf (Max)

TOLERANCE	Decimal	±0.2
	Angle	±1°
MATERIAL		
FINISH		

3	INSULATOR	1	TEFLON		DIN03026-N/3
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03986-5/4
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04468-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE 2022. 02. 07.			KJ COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
APPROVED BY S.H.KIM					
CHECKED BY		TITLE SMPM50 PCB PS-4R [FULL DETENT]			
DRAWN BY S.Y.EUN					
SCALE 7/1		UNIT mm	 A4 DWG NO. CN03826-7/2 REVISION 1 SHEET 1 of 1		