
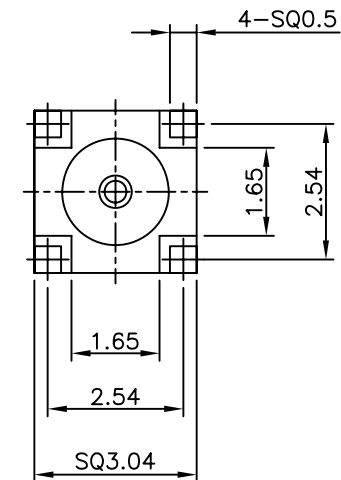


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2022. 01. 27.

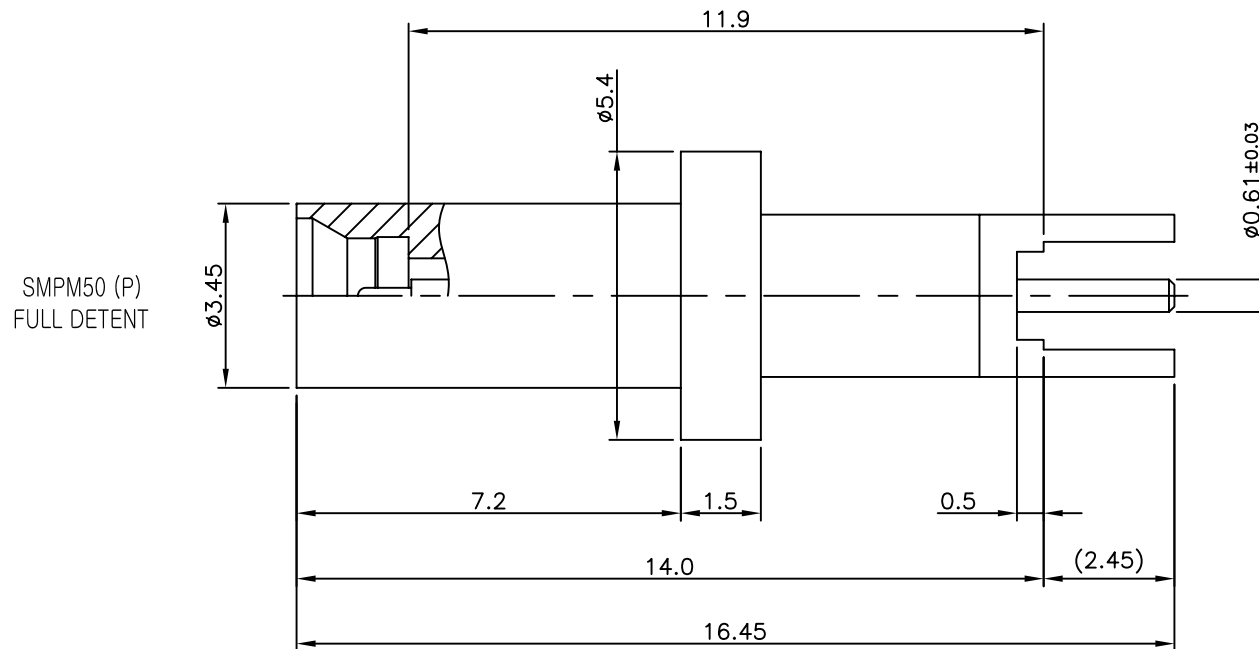


* ELECTRICAL DATA


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VRMS (Min)

* MECHANICAL DATA

1. DURABILITY : 500 CYCLES MIN
2. TEMPERATURE RANGE : -65°C to +165°C

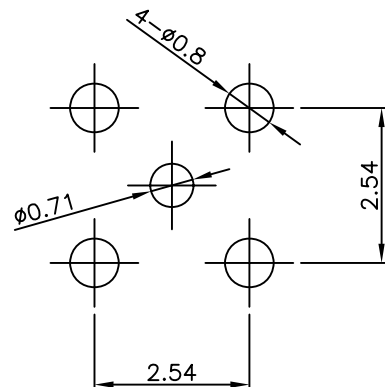

PCB MOUNTING HOLE

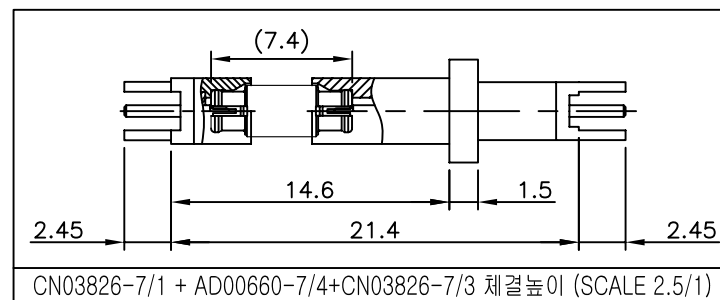

3	INSULATOR	1	TEFLON		DIN03026-N/3
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03986-5/5
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DBD04468-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	±0.2	2022. 01. 27.						
	Angle	APPROVED BY	S.H.KIM			KJ COMTECH CO.,LTD.		
MATERIAL	±1°	CHECKED BY						
		DRAWN BY	S.Y.EUN					
FINISH		SCALE	UNIT		TITLE SMPM50 PCB PS-4R [FULL DETENT]			
		7/1	mm					
					A4	DWG NO.	CN03826-7/3	
						REVISION	R	SHEET 1 of 1