


Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.06.21.

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~50GHz
3. VSWR (Max) : 1.3

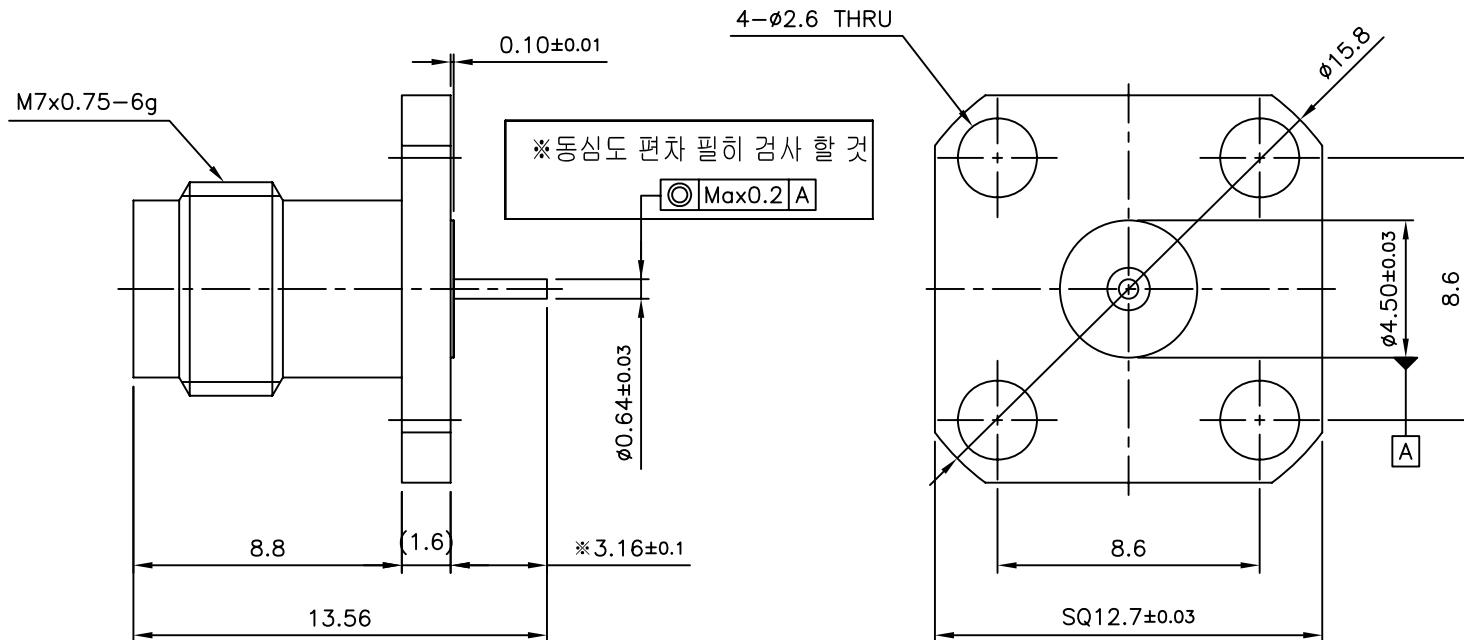

4	포장금형 GASKET	1	NBR	BLACK	DGK00335-N/1
3	INSULATOR	1	TEFLON		DIN03054-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04021-5/1
1	BODY	1	SUS	Passivated	DBD04502-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 06. 21.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	±1°	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.4mm SOLDER END JS-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. CN03842-7/1 REVISION I R SHEET 1 of 1
		4/1	mm	