
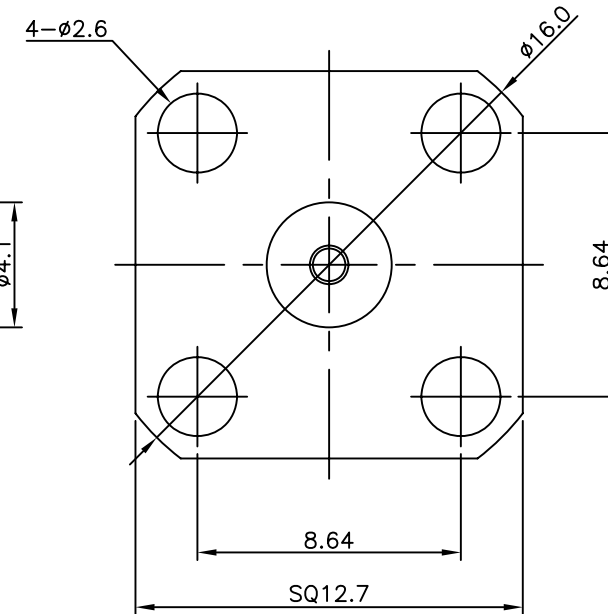


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.06.04.

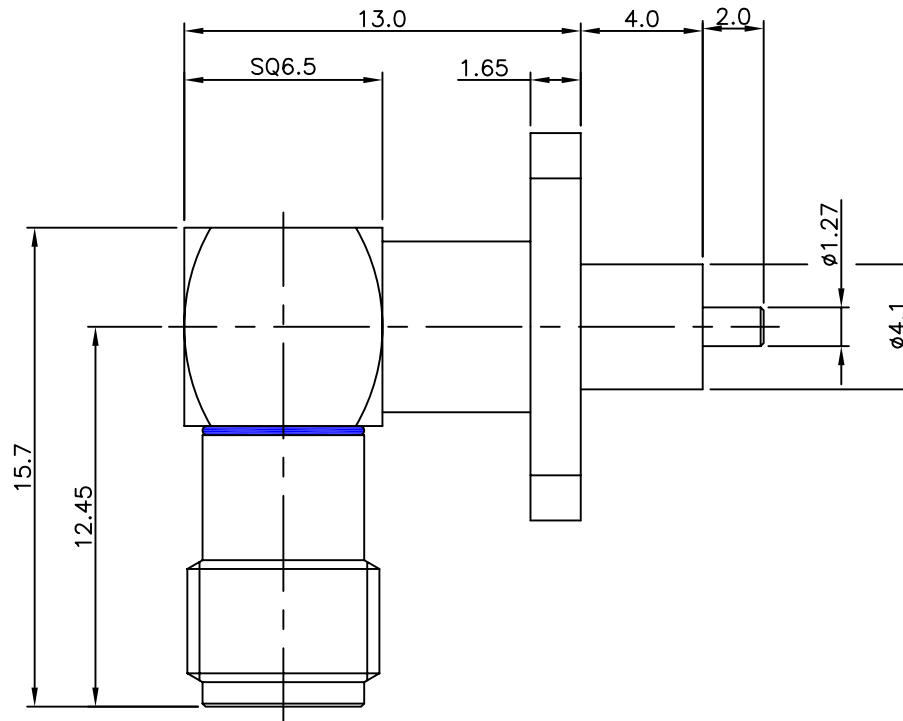

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. DIELECTRIC WITHSTANDING VOLTAGE : 750 V RMS
5. CENTER CONTACT RESISTANCE : $\leq 3.0\text{m}\Omega$
6. OUTER CONTACT RESISTANCE : $\leq 2.5\text{m}\Omega$

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE : -55°C ~ +125°C

6	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00042-5/1	
5	INSULATOR	1	TEFLON		DIN01238-N/2	
4	INSULATOR	1	TEFLON		DIN01893-N/2	
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03671-5/2	
2	CONTACT	1	BeCu C17300	Gold Plate	DCT02428-5/3	
1	1-2 BODY	1	MBsBD C3604BD-F	Gold Plate	DBB00489-5/2	DBD04537-1/2
	1-1 BODY	1	MBsBD C3604BD-F	Gold Plate		DBD04742-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE	

TOLERANCE	Decimal	DATE 2021. 06. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 SOLDER END JL-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	4/1	A4 DWG NO. CN03870-7/2 REVISION I R SHEET 1 of 1
		UNIT	mm	