

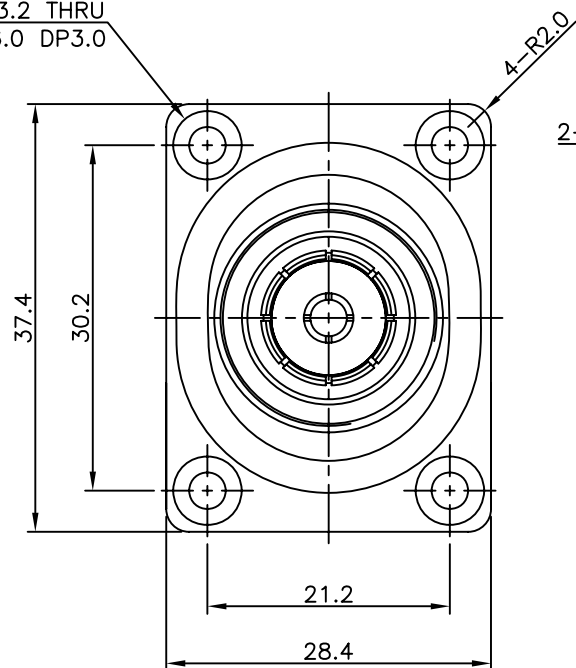


* O-RING 가스켓 눌림량 25%~30% 적용

4- ϕ 3.2 THRU
4-C/B ϕ 6.0 DP3.0

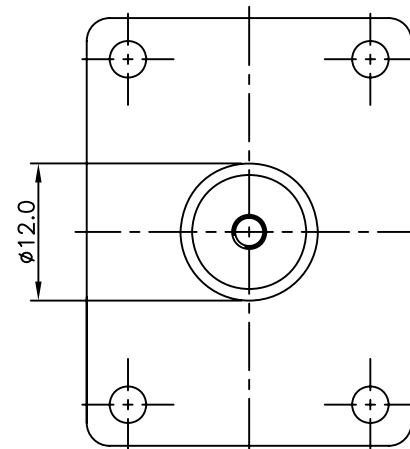

2-M20x1.0

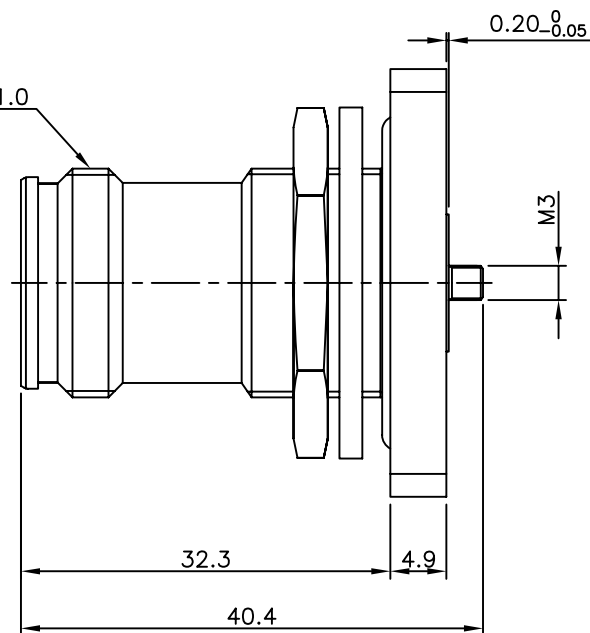

7	WASHER	1	MBsBD C3604BD-F	Nickel Plate	DWA00142-5/2
6	NUT	1	MBsBD C3604BD-F	Nickel Plate	DNT00107-5/2
5	GASKET	1	SILICONE		DGK00190-N/1
4	JACK	1	MBsBD C3604BD-F	Silver Plate (3 μ m)	DJA00228-5/6
3	INSULATOR	1	TEFLON		DIN03044-N/2
2	CONTACT	1	BeCu C17300	Silver Plate (6 μ m)	DCT04059-5/1
1	BODY	1	MBsBD C3604BD-F	이원합금(Ni/Tin)	DBD04547-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 09. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE 4.3/10 DIN50 SOLDER END JB-4H
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	1.5/1	DWG NO. CN03876-7/1 REVISION I R SHEET 1 of 1
		UNIT	mm	

A4