
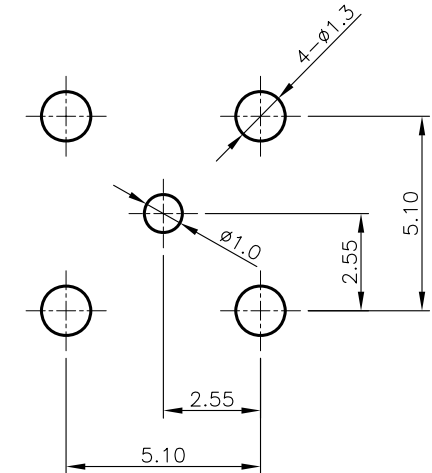
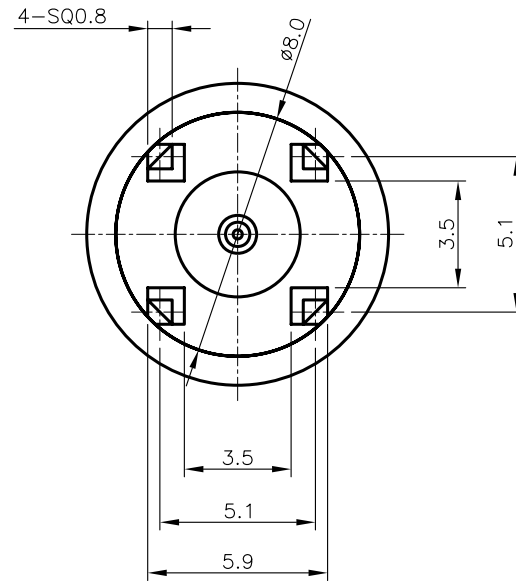


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2020.02.28.

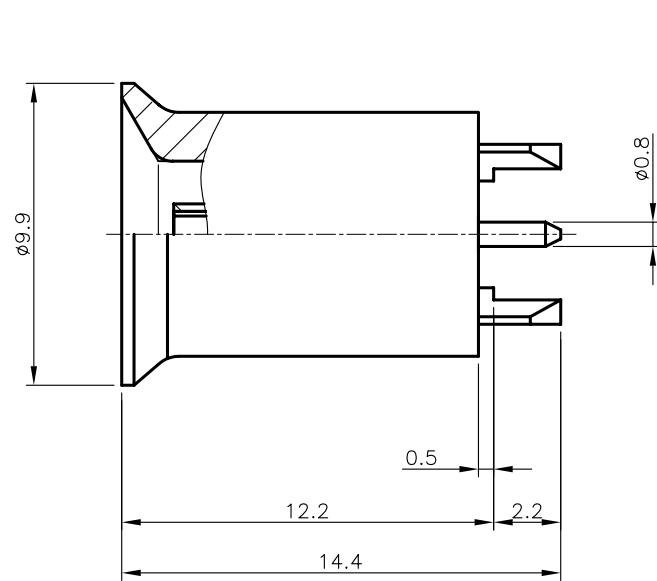


PCB MOUNTING HOLE SIZE

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~4GHz
3. VSWR (Max) : 1.2

* MATING 후 치수 (SCALE 2:1)

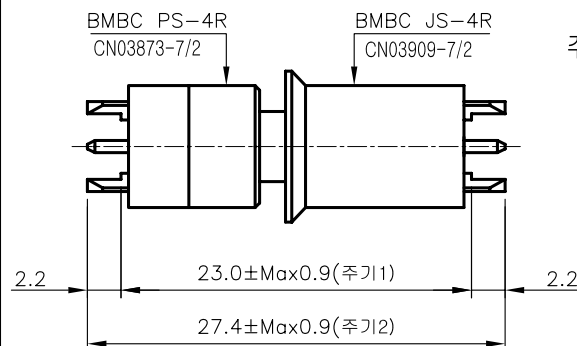

주 기

1. Axial Working Range : Max±0.9mm
→ PCB to PCB 범위 : 22.1mm ~ 23.9mm
→ 전장치수범위 : 26.5mm ~ 28.3mm
2. Radial Working Range : Max0.9mm

※ Max 0.9mm 이상 벗어날 경우
접촉 신호불량 문제 발생될 수 있음

3	INSULATOR	1	TEFLON		DIN03002-N/3
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT03804-5/5
1	BODY	1	MBsBD C3604BD-F	Nickel Plate (납땜성 향상)	DBD04279-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 02. 28.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY					
	±0.2						
MATERIAL	±1°	CHECKED BY			TITLE BMBC50 PCB JS-4R		
	_____	DRAWN BY					
	_____	I.C.KIM					
FINISH	_____	SCALE	UNIT	A4	DWG NO.	CN03909-7/2	
	_____	4/1	mm			REVISION	I R