
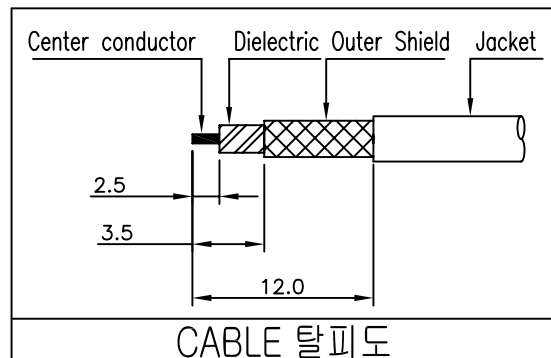


* ELECTRICAL DATA :

1. IMPEDANCE : 50Ω
2. FREQUENCY RANGE : DC~1.8GHz
 - 2-1. BAND 3 : 1.8GHz
 - 2-2. BAND 8 : 900MHz
 - 2-3. BAND 28 : 700MHz
3. VSWR (Max) : 1.2

*Compliance with standard IP67

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.04.21.
1	고객사 요청으로 인한 가스켓 조립부 깊이 변경	S.Y.EUN	I.C.KIM	2021.03.24.

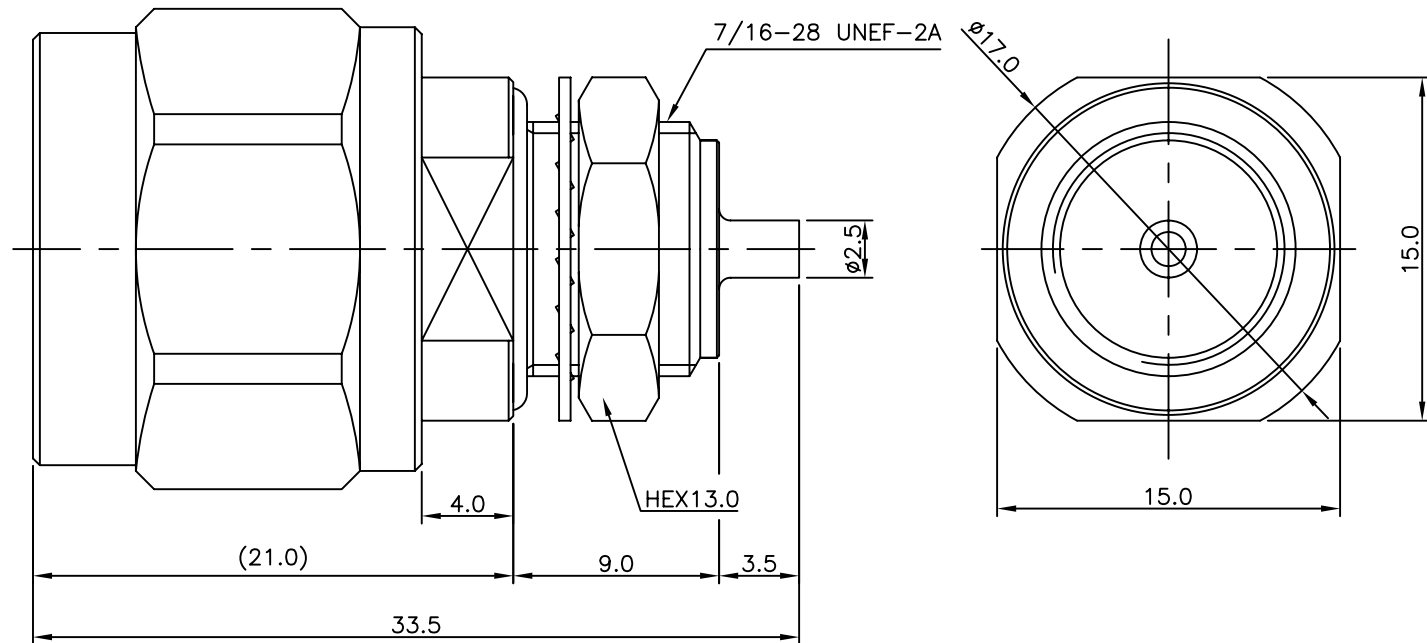

9	SPRING RING	1	PBR	Nickel Plated	DSR00020-5/1
8	COUPLING CAP	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DCU00063-5/6
7	WASHER	1	BsS	Nickel Plated	DWA00023-5/1
6	NUT	1	MBsBD C3604BD-F	Nickel Plated	DNT00042-5/1
5	INSULATOR	1	TEFLON		DIN01800-N/1
4	GASKET	1	SILICONE		DGK00032-N/1
3	GASKET	1	SILICONE		DGK00013-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plated	DCT04119-5/1
1	BODY	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DBD04618-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 03. 24.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE N50 CABLE PB (R/N) MCC 1.5Φ
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	3/1	DWG NO. CN03925-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	